

T8 Special Length Standard

F14W/133 -T8

0000039

Range features



PRODUCT OVERVIEW

Light colour	640 Cool White
Ordering number	0000039
Technology	Fluorescent
Energy class	B
Lamp shape	Linear
Lamp finish	Coated
Dimmable	
Cap/Base	G13
Type	T8 Standard Special Length
EAN code	5410288000398
CRI (Ra)	64
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	700
Watt (Nominal) (W)	14
Voltage (V)	38

T8 Special Length Standard

F14W/133 -T8

0000039

DATA TABLE

General data

Ordering number	0000039
Technology	Fluorescent
Energy class	B
Average life (Nominal) (h)	14000
Lamp shape	Linear
Lamp finish	Coated
Dimmable	
Cap/Base	G13
Type	T8 Standard Special Length
EAN code	5410288000398
E-number SE	8356681
E-number FI	4942381
Product name	F14W/133 -T8
Lamp mercury content (mg)	2.3
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
IEC Reference 3	
Intended purpose	
Special purpose lamp	Yes
Transformer required	No
Sales pack quantity	25
Rated survival factor at 2000 h 50Hz	
Rated survival factor at 4000 h 50Hz	
Rated survival factor at 6000 h 50Hz	
Rated survival factor at 8000 h 50Hz	
Rated survival factor at 12000 h 50Hz	
Rated survival factor at 16000 h 50Hz	
Rated survival factor at 20000 h 50Hz	

T8 Special Length Standard

F14W/133 -T8

0000039

Optical data

Light colour	640 Cool White
CRI (Ra)	64
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	700
Luminous flux (Nominal) at 35°C (lm)	
Luminous flux (Nominal) (lm)	700
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h 50Hz	
Rated lumen maint. factor at 4000 h 50Hz	
Rated lumen maint. factor at 6000 h 50Hz	
Rated lumen maint. factor at 8000 h 50Hz	
Rated lumen maint. factor at 12000 h 50Hz	
Rated lumen maint. factor at 16000 h 50Hz	
Rated lumen maint. factor at 20000 h 50Hz	

Electrical data

kWh per 1000 hours burning time	
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	
Watt (Rated) (W)	
Watt (Nominal) (W)	14
Voltage (V)	38
Ignition voltage (V)	0
Current (A)	0.395

Physical data


Weight (kg)	0.05
Length base to base (mm) - A	361.2
Length base to pin Min-Max - B	365.8-368.3
Max overall length (mm) - C	375.4
Max. Lamp Diameter (mm) - D	26
Diameter (mm)	26
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	37.60 x 2.90 x 2.80
Outer package dimensions (L x W x H) (cm)	40.00 x 15.50 x 15.00

T8 Special Length Standard

F14W/133 -T8

0000039

PHOTOMETRY

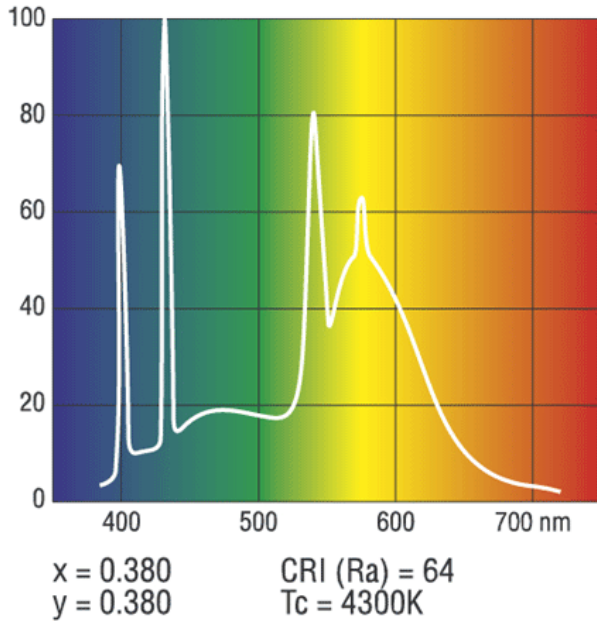

TECHNICAL DRAWINGS

