

## FLUORA T8

---

Tubular fluorescent lamps 26 mm, with G13 bases, for plant growing




- Wherever there is not enough natural daylight for plants
- Public buildings
- Offices
- Shops
- Supermarkets and department stores
- Restaurants

### Product benefits

---

- Promotes photobiological processes in plants
- Promotes plant growth



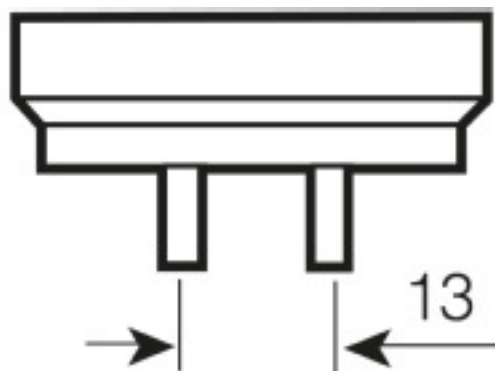

G13  
IEC 7004-51  
DIN 49653 T1

---

*Product line drawing*

L 15 W/77 | L 18 W/77 | L 30 W/77 | L 36 W/77 | L 58 W/77

---

*Base*

L 15 W/77 | L 18 W/77 | L 30 W/77 | L 36 W/77 | L 58 W/77

## Technical data

Product description	Nominal wattage	Luminous flux at 25 °C	Light color as per EN 12464-1	Base (standard designation)	Tube diameter	Length with base excl. base pins/connection
L 15 W/77	15 W	400 lm	-	G13	26 mm	438.00 mm
L 18 W/77	18 W	550 lm	-	G13	26 mm	590.00 mm
L 30 W/77	30 W	1000 lm		G13	26 mm	895.00 mm
L 36 W/77	36 W	1400 lm		G13	26 mm	1200.00 mm
L 58 W/77	58 W	2250 lm		G13	26 mm	1500.00 mm

Product description	Lifespan	Appropriate disposal acc. to WEEE	EEL – Energy Label
L 15 W/77	13000 h <sup>1)</sup>	Yes	-
L 18 W/77	13000 h <sup>1)</sup>	Yes	-
L 30 W/77	13000 h <sup>1)</sup>	Yes	
L 36 W/77	13000 h <sup>1)</sup>	Yes	
L 58 W/77	13000 h <sup>1)</sup>	Yes	

<sup>1)</sup> With preheat ECG

## Safety advice

---

In case of lamp breakage: [www.osram.com/brokenlamp](http://www.osram.com/brokenlamp)

## Application advice

---

For more detailed application information and graphics please see product datasheet.

## References / Links

---

For more information on QUICKTRONIC electronic control gear go to

▶ [www.osram.com/QUICKTRONIC](http://www.osram.com/QUICKTRONIC)

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.