

## 64346

---

Halogen lamps, current-controlled, single-ended



- Airfield lighting

### Product benefits

---

- Reduced operation and maintenance costs due to long life time
- Instant and constant light output over the lamp life
- Flicker-free operation
- Mercury-free

### Product features

---

- Dimmable
- Infrared radiation output that provides light in the worst of conditions

## Technical data

---

### Electrical data


Nominal wattage	100 W
Nominal current	6.60 A

### Light technical data

Luminous flux	2300 lm
---------------	---------

### Dimensions & weight

Diameter	13.5 mm
Length	47.0 mm

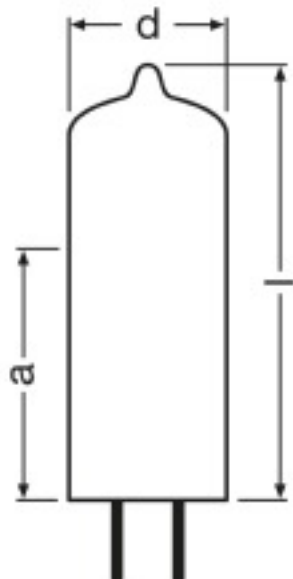

*Product line drawing*

**Lifespan**

Lifespan	1200 h
----------	--------

**Additional product data**

Base (standard designation)	G6.35
-----------------------------	-------

**Country specific categorizations**

Order reference	64346
-----------------	-------

## Safety advice

---

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (protective shields, grids, etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. There must also be a warning sign to indicate that the lamps give off high levels of heat. Detailed information is available on request.



---

*Burning position*

**Logistical Data**

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321106384	Folding carton box 1	25 mm x 23 mm x 70 mm	6.00 g	0.04 dm <sup>3</sup>
4008321106391	Shipping carton box 40	121 mm x 107 mm x 144 mm	290.50 g	1.86 dm <sup>3</sup>

## References / Links

---

For more information on airfield lamps see the brochure:

"The reliable guiding stars - Effective solutions for airfield lighting: Tungsten halogen lamps and LED light sources".

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.