Technical Information No. DO 4042

Edition: 05/06 - subject to change Supersedes: 02/02 Status: valid


64678 (230V)

Product description

The OSRAM 64678 is mainly used for studio and theatre lighting. The lamp has a compact filament and optimum for ellipsoidal Spot luminaires.

Technical Data

Lamp / order reference		64678
ANSI		-
LIF		-
Rated lamp wattage	W	800
Rated lamp voltage	V	230V
Average life-time	h	250
Color temperature	K	3150
Luminous flux	lm	20000
Luminous efficiency	Lm/W	25.00
Base		G9.5
Diameter d	mm	19
Lamp length L	mm	101 max.
LCL a	mm	60.5 <u>+</u> 2
Type of coil		biplan

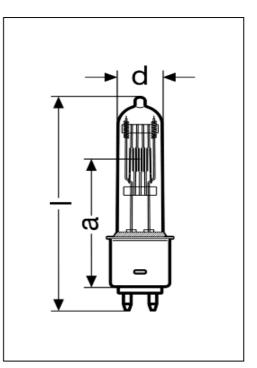

Lamp operation

Max. pinch seal temperature °C	350°C max.
Cooling	convection
Burning position	s180
Fuse protection	6.3A quick

