



# Primaline Halogen Transformers

## Primaline 105 230-240V 50/60Hz

Philips Primaline is a high-frequency electronic halogen transformer suitable for low-voltage 12 V halogen lamps. It offers ultimate performance and is built with overload and short circuit protection to IEC and ENEC standards. It is available in 70, 105 and 150 W versions and fits in small down light halogen applications.

### Product data

#### • General Characteristics

Rated Lamptype	LV Halogen
Rated Number of Lamps	2 piece
Rated Ballast-Lamp Power	50-105
Line Voltage	230-240 V
Line Frequency	50/60 Hz
Lifetime 90% surv.@Tcaselife	50000 hr

#### • Operating Characteristics

Power Consumption Range	50-105 W
Ballast Efficiency Factor	0.95 -

#### • Temperature Characteristics

T-case life	65 C
T-case maximum	80 (max) C

#### • Product Dimensions

Length A1	110 mm
-----------	--------

Width B1	45 mm
Height C1	33 mm

#### • Approval & Application Chars

Approval marks	ENEC / SELV
CE marking	Yes

#### • Product Data




Order code	913700627691
Full product code	913700627691
Full product name	Primaline 105 230-240V 50/60Hz
Order product name	Primaline 105 230-240V 50/60Hz
Pieces per pack	1
Packing configuration	50
Packs per outerbox	50
Bar code on pack - EAN1	8711500912688
Bar code on outerbox - EAN3	8711500912695
Logistic code(s) - 12NC	913700627691
Net weight per piece	0.126 kg

### Warnings and Safety

- Transformer is not suitable for DC operation

**PHILIPS**

## Dimensional drawing

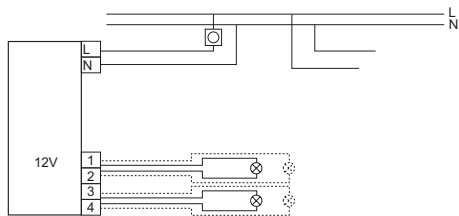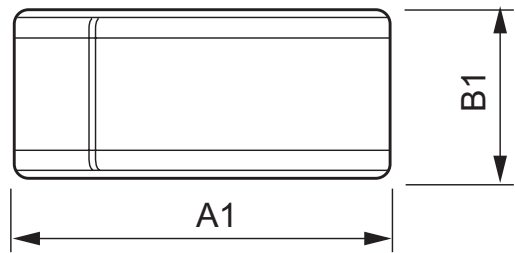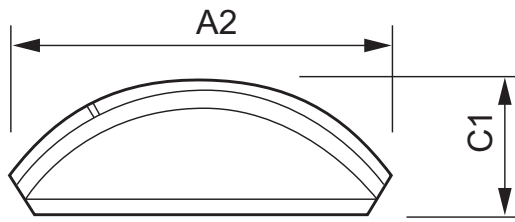

### Primaline 105 230-240V 50/60Hz

Product	A1 (Norm)	B1 (Norm)	C1 (Norm)
Primaline 105 230-240V 50/60Hz	110	45	33



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, July 5  
data subject to change