



Capsuleline

Capsuleline 5W G4 12V CL 2000h 1CT

Single-ended low-voltage halogen capsule giving crisp white halogen light. Compact shape, crisp white light. Low-voltage halogen capsule. Ideal solution for small decorative luminaires. UV-block glass and low-pressure filling allow usage without cover glass. The compact Capsuleline delivers crisp white light over a long lifetime.

Product data

• General Characteristics

Philips Code	18048
Cap-Base	G4
Cap-Base Information	15
Bulb	T3 [T3: .354 inch / 9 mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Nominal Lifetime	2000 hr
Rated Lifetime (hours)	2000 hr
Rated Lifetime (years)	2 an

• Light Technical Characteristics

Color Rendering Index	100 Ra8
Color Temperature	2700 K
Color Temperature Technical	2750 K
Luminous flux lamp	40 Lm
Rated Luminous Flux	40 Lm
LLMF - end nominal lifetime	80 (min) %

• Electrical Characteristics

Rated Wattage	5.00 W
Lamp Wattage	5 W
Lamp Wattage Technical	5 W
Power Factor	1 -
Voltage	12 V
Dimmable	Yes
Starting Time	0.0 s
Warm-up Time to 60% Light Outp	instant full light

• Environmental Characteristics

Energy Efficiency Label (EEL)	C
Energy consumption kWh/1000h	5 kWh

• Measuring Conditions

Switching cycle	8000X
-----------------	-------

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	220 (max) C

• Product Dimensions

Overall Length C	33 (max) mm
Diameter D	10 (max) mm
Light Center Length L	22 mm

• Product Data

Order code	924889217114
Full product code	924889217114
Full product name	Capsuleline 5W G4 12V CL 2000h 1CT
Order product name	Caps 5W G4 12V CL 2000h 1CT/10X10F
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500654106



PHILIPS

Capsuline

Bar code on intermediate packing - EAN2 8711500654335
 Bar code on outerbox - EAN3 8711500654120

Logistic code(s) - 924889217114
 12NC
 ILCOS code HSG/C-5-12-G4
 Net weight per piece 1.200 gr


Dimensional drawing

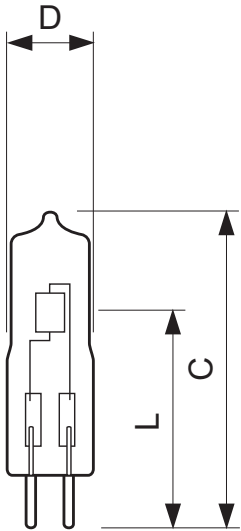

G4

Capsuline 5W G4 12V CL 2000h 1CT


Product	C (Max)	D (Max)	L (Norm)
CAP 18048 5W G4 12V CL	33	10	22

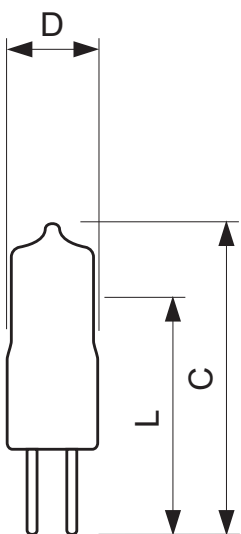


Capsuline 5W G4 12V CL 2000h 1CT

Product	C (Max)	D (Max)	L (Norm)
CAP 18048 5W G4 12V CL	33	10	22

Dimensional drawing




G4

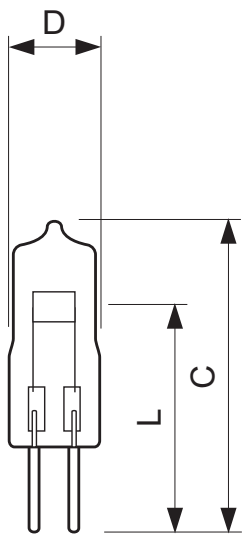


Capsuleline 5W G4 12V CL 2000h 1CT

Product	C (Max)	D (Max)	L (Norm)
CAP 18048 5W G4 12V CL	33	10	22




G4

Dimensional drawing

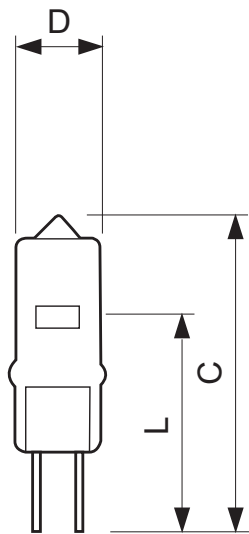

Capsuleline 5W G4 12V CL 2000h 1CT

Product	C (Max)	D (Max)	L (Norm)
CAP 18048 5W G4 12V CL	33	10	22



G4



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, December 15
data subject to change