



MASTER PL-C 4 Pin

MASTER PL-C 10W/840/4P 1CT

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Product data

• General Characteristics

Cap-Base	G24q-1
Cap-Base Information	4P
Life to 10% fail	8000 hr
Preheat EL,3h	
Life to 50% fail	13000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	98 %
4000h Rated,3h	
LSF HF Preheat	97 %
6000h Rated,3h	
LSF HF Preheat	90 %
8000h Rated,3h	
LSF HF Preheat	60 %
12000h Rated,3h	

Lum Efficacy Rated	63 Lm/W
HF 25°C	
LLMF HF 2000h	92 %
Rated	
LLMF HF 4000h	88 %
Rated	
LLMF HF 6000h	86 %
Rated	
LLMF HF 8000h	84 %
Rated	
LLMF HF 12000h	81 %
Rated	
Design Temperature	28 C
Chromaticity Coordinate X	380 -
Chromaticity Coordinate Y	380 -

• Light Technical Characteristics

Color Code	840 [CCT of 4000K]
Color Rendering Index	82 Ra8
Color Designation (text)	Cool White
Color Temperature	4000 K
Luminous Flux EM	600 Lm
25°C, Rated	
Luminous Flux EM	600 Lm
25°C, Nominal	
Luminous Flux EL	600 Lm
25°C, Rated	
Luminous Flux EL	600 Lm
25°C, Nominal	
Lum Efficacy Rated	63 Lm/W
EM 25°C	

• Electrical Characteristics

Lamp Wattage	10 W
Lamp Wattage EM	10.0 W
25°C, Rated	
Lamp Wattage EL	9.5 W
25°C, Rated	
Lamp Wattage EL	10 W
25°C, Nominal	
Lamp Voltage EM	63 V
25°C	
Lamp Voltage EL	51 V
25°C	
Lamp Current EM	0.190 A
25°C	
Lamp Current EL	0.190 A
25°C	
Dimmable	Yes



MASTER PL-C 4 Pin

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	11 kWh

• Product Dimensions

Base Face to Base Face A	75.7 (max) mm
Insertion Length B	94.0 (max) mm
Overall Length C	108.9 (max) mm
Diameter D	27.1 (max) mm
Diameter D1	27.1 (max) mm

• Product Data

Order code	927907084040
------------	--------------



Full product code	927907084040
Full product name	MASTER PL-C 10W/840/4P 1CT
Order product name	MASTER PL-C 10W/840/4P 1CT/5X10CC
Pieces per pack	1
Packing configuration	5X10CC
Packs per outerbox	50
Bar code on pack - EAN1	8711500623300
Bar code on intermediate packing - EAN2	8711500624086
Bar code on outerbox - EAN3	8711500711038
Logistic code(s) - 12NC	927907084040
ILCOS code	FSQ-10/40/1B-E-G24q=1
Net weight per piece	41.400 gr

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear

- Shorter lamp life when often switching and not well pre-heated electrodes

Dimensional drawing

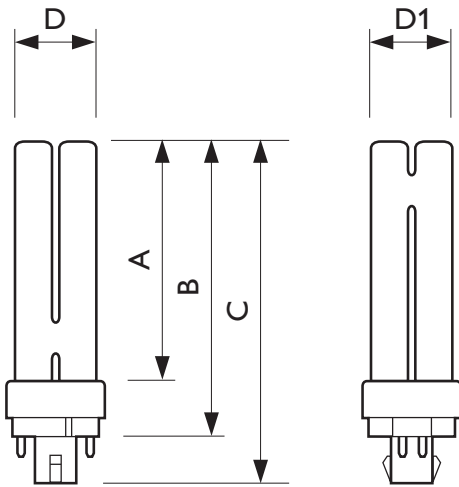


G24q-1

MASTER PL-C 10W/840/4P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C 10W/840/4P	75.7	94.0	108.9	27.1	27.1

Photometric data

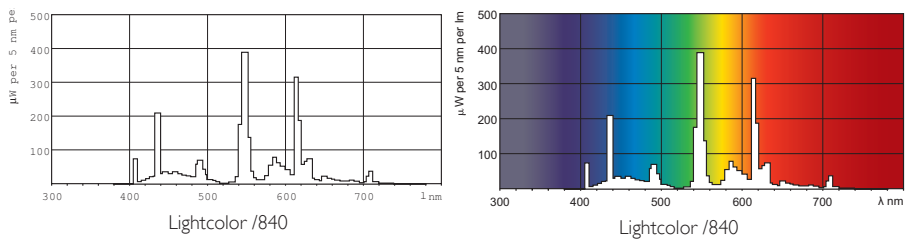

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, June 19
data subject to change