



MASTER PL-C 4 Pin

MASTER PL-C 18W/830/4P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


| General Information | | Operating and Electrical | |
|------------------------------------|---------------------|------------------------------------|---------|
| Cap-Base | G24Q-2 [G24q-2] | Correlated Color Temperature (Nom) | 3000 K |
| Life to 50% Failures Preheat (Nom) | 13000 h | Luminous Efficacy (rated) (Nom) | 67 lm/W |
| LSF Preheat 2000 h Rated | 99 % | Color Rendering Index (Nom) | 82 |
| LSF Preheat 4000 h Rated | 98 % | LLMF 2000 h Rated | 92 % |
| LSF Preheat 6000 h Rated | 97 % | LLMF 4000 h Rated | 87 % |
| LSF Preheat 8000 h Rated | 90 % | LLMF 6000 h Rated | 83 % |
| | | LLMF 8000 h Rated | 81 % |
| | | LLMF 12000 h Rated | 81 % |
| Light Technical | | | |
| Color Code | 830 [CCT of 3000K] | Power (Nom) | 16.5 W |
| Luminous Flux (Nom) | 1200 lm | Lamp Current (Nom) | 0.230 A |
| Luminous Flux (Rated) (Nom) | 1200 lm | | |
| Color Designation | Warm White (WW) | | |

MASTER PL-C 4 Pin

| Temperature | |
|-------------------------------|--------|
| Design Temperature (Nom) | 28 °C |
| Controls and Dimming | |
| Dimmable | Yes |
| Mechanical and Housing | |
| Cap-Base Information | 4 Pins |
| Approval and Application | |
| Energy Efficiency Label (EEL) | A |
| Mercury (Hg) Content (Nom) | 1.4 mg |
| Energy Consumption kWh/1000 h | 20 kWh |

| Product Data | |
|---------------------------------|------------------------------------|
| Full product code | 871150062333170 |
| Order product name | MASTER PL-C 18W/830/4P 1CT/5X10BOX |
| EAN/UPC - Product | 8711500623331 |
| Order code | 927907283040 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 50 |
| Material Nr. (12NC) | 927907283040 |
| Net Weight (Piece) | 55.300 g |
| ILCOS Code | F5Q-18/30/1B-E-G24q=2 |


Dimensional drawing




| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|---------------------------------------|---------|----------|----------|----------|----------|
| MASTER PL-C 18W/830/4P 1CT/5X10BOX | 27.1 mm | 27.1 mm | 109.5 mm | 128.0 mm | 142.9 mm |

PL-C 18W/830/4P

Photometric data

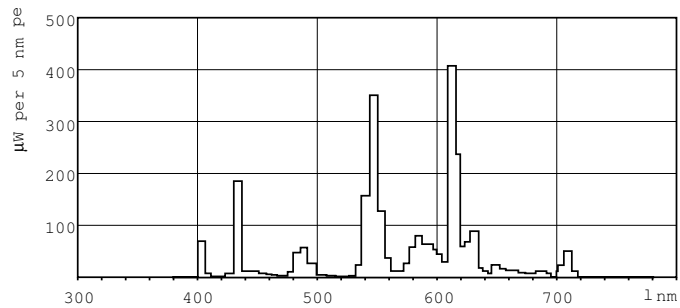

LDPB_PLC4P_830-Spectral power distribution B/W

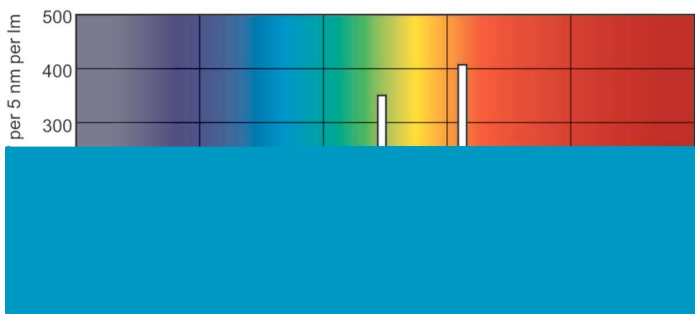

LDPO_PLC4P_830-Spectral power distribution Colour

MASTER PL-C 4 Pin

Lifetime



LDLE_PLC4P_0001-Life expectancy diagram

LDLE_PLC4P_0002-Life expectancy diagram



LDLM_PLC4P_0001-Lumen maintenance diagram

