



MASTER TL-D Eco

MASTER TL-D Eco 51W/830 1SL

The MASTER TL-D Eco lamp offers the same light output as a MASTER TL-D Super 80 lamp, while using less energy, thanks to the use of specific phosphors and a special gas filling. Application areas are schools, offices, governmental buildings and healthcare environments.

Product data

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T8 [26 mm]
Life to 10% failures EM	12000 hr
Life to 10% fail Preheat EL,3h	17000 hr
Life to 10% fail Nonpreh EL,3h	10000 hr
Life to 50% failures EM	15000 hr
Life to 50% fail Preheat EL,3h	20000 hr
Life to 50% fail Nonpreh EL,3h	12000 hr
LSF EM 2000h Rated, 3h cycle	99 %
LSF EM 4000h Rated, 3h cycle	99 %
LSF EM 6000h Rated, 3h cycle	99 %
LSF EM 8000h Rated, 3h cycle	99 %
LSF EM 12000h Rated,3h cycle	89 %
LSF EM 16000h Rated,3h cycle	33 %
LSF EM 20000h Rated,3h cycle	2 %

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Warm White

Color Temperature	3000 K
Luminous Flux EM 25°C, Rated	4550 Lm
Luminous Flux EM 25°C, Nominal	4550 Lm
Luminous Flux Lamp EM 30°C	4800 Lm
Lum Efficacy Rated EM 25°C	89 Lm/W
LLMF EM 2000h Rated	96 %
LLMF EM 4000h Rated	95 %
LLMF EM 6000h Rated	94 %
LLMF EM 8000h Rated	93 %
LLMF EM 12000h Rated	92 %
LLMF EM 16000h Rated	91 %
LLMF EM 20000h Rated	90 %
Design Temperature	30 C
Chromaticity Coordinate X	439 -
Chromaticity Coordinate Y	409 -

• Electrical Characteristics

Lamp Wattage	51 W
Lamp Wattage EM 25°C, Nominal	51 W
Lamp Wattage EM 25°C, Rated	51.4 W



MASTER TL-D Eco

Lamp Voltage EM 25°C	95 V
Lamp Current EM 25°C	0.700 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content	2.0 mg
Energy consumption kWh/1000h	60 kWh

• Product Dimensions


Base Face to Base	1500.0 (max) mm
Face A	
Insertion Length B	1504.7 (min), 1507.1 (max) mm

Overall Length C	1514.2 (max) mm
Diameter D	28 (max) mm

• Product Data


Order code	927922183023
Full product code	927922183023
Full product name	MASTER TL-D Eco 51W/830 1SL
Order product name	MASTER TL-D Eco 51W/830 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500264664
Bar code on outerbox - EAN3	8711500264671
Logistic code(s) - 12NC	927922183023
ILCOS code	FD-51/30/1B-E-G13-26/1500
Net weight per piece	172.600 gr

Dimensional drawing

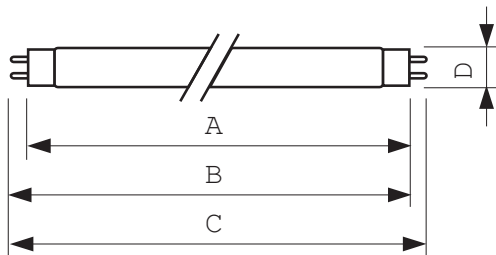



MASTER TL-D Eco 51W/830 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D Eco 51W/830	1500.0	1504.7	1507.1	1514.2	28



G13

Photometric data

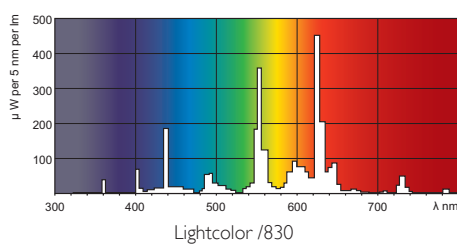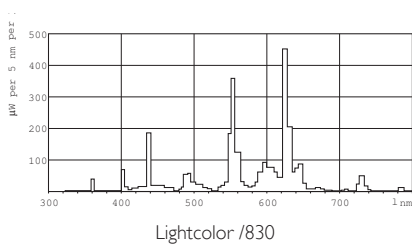



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of
Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 10
data subject to change