



MASTER TL5 High Output Xtra

MASTER TL5 HO Xtra 49W/830 1SL

This TL5 lamp (tube diameter 16 mm) combines the advantages of a TL5 High Output lamp (TL5 HO lamps are optimized for installations requiring high light output and offer excellent lumen maintenance and color rendering) with a long and reliable lifetime. This results in extra-low maintenance costs and saves on expensive spot replacement. Main applications are places where lamp replacement costs and/or costs of disruption are high.

Product data

• General Characteristics

System Description	High Output
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	30000 hr
Preheat EL,3h	
Life to 50% fail	45000 hr
Preheat EL,3h	
LSF HF Preheat	100 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	98 %
16000h Rated,3h	
LSF HF Preheat	97 %
20000h Rated,3h	

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Luminous Flux EL 25°C, Rated	4375 Lm
Luminous Flux EL 25°C, Nominal	4375 Lm

Luminous Flux Lamp EL 35°C	4900 Lm
Lum Efficacy Rated HF 25°C	89 Lm/W
Lum Efficacy Rated HF 35°C	98 Lm/W
Luminance Average EL 25°C	2.0 cd/cm2
LLMF HF 2000h Rated	96 %
LLMF HF 4000h Rated	95 %
LLMF HF 6000h Rated	94 %
LLMF HF 8000h Rated	93 %
LLMF HF 12000h Rated	92 %
LLMF HF 16000h Rated	91 %
LLMF HF 20000h Rated	90 %
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Electrical Characteristics

Lamp Wattage	49 W
Lamp Wattage EL 25°C, Rated	49.2 W
Lamp Wattage EL 25°C, Nominal	49.0 W
Lamp Wattage EL 35°C	49.3 W



MASTER TL5 High Output Xtra

Lamp Voltage EL 25°C	195 V
Lamp Voltage EL 35°C	191 V
Lamp Current EL 25°C	0.255 A
Lamp Current EL 35°C	0.260 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	3.0 mg
Energy consumption kWh/1000h	54 kWh

• Measuring Conditions

Calibration Current	0.255 A
HF Generator Rated Voltage	390 V
Resistor	765 ohm

• Product Dimensions

Base Face to Base Face A	1449.0 (max) mm
Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

• Product Data



Order code	927927783026
Full product code	927927783026
Full product name	MASTER TL5 HO Xtra 49W/830 1SL
Order product name	MASTER TL5 HO Xtra 49W/830 1SL
Pieces per pack	1
Packing configuration	20
Packs per outerbox	20
Bar code on pack - EAN1	8711500262516
Bar code on outerbox - EAN3	8711500262523
Logistic code(s) - 12NC	927927783026
ILCOS code	FDH-49/30/1B-L/P-G5-16/1450
Net weight per piece	128.700 gr

Warnings and Safety

- Philips HF Xtreme gear ensures longest lifetime.

- To achieve lifetimes as published for 100% operation, dimming below 30% should not be applied.

Dimensional drawing


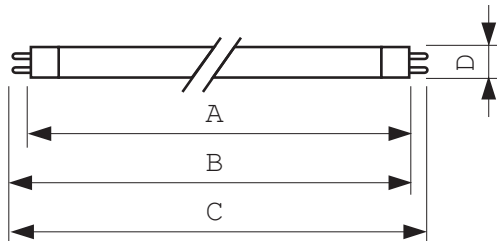


G5

MASTER TL5 HO Xtra 49W/830 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO Xtra 49W/830	1449.0	1453.7	1456.1	1463.2	17

Photometric data

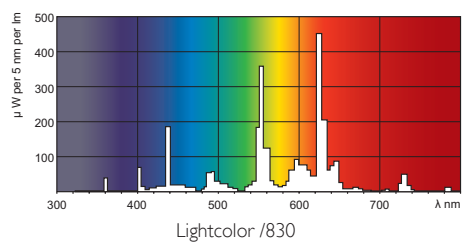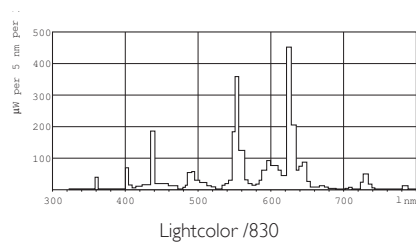

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 10
data subject to change