



MASTER TL5 High Output

MASTER TL5 HO 54W/827 1SL

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Product data

• General Characteristics

| | |
|----------------------|-------------|
| System Description | High Output |
| Cap-Base | G5 |
| Cap-Base Information | Green Plate |
| Bulb | T5 [16 mm] |
| Life to 10% fail | 21000 hr |
| Preheat EL,3h | |
| Life to 50% fail | 30000 hr |
| Preheat EL,3h | |
| LSF HF Preheat | 99 % |
| 2000h Rated,3h | |
| LSF HF Preheat | 99 % |
| 4000h Rated,3h | |
| LSF HF Preheat | 99 % |
| 6000h Rated,3h | |
| LSF HF Preheat | 99 % |
| 8000h Rated,3h | |
| LSF HF Preheat | 99 % |
| 12000h Rated,3h | |
| LSF HF Preheat | 97 % |
| 16000h Rated,3h | |
| LSF HF Preheat | 84 % |
| 20000h Rated,3h | |

• Light Technical Characteristics

| | |
|-------------------|--------------------|
| Color Code | 827 [CCT of 2700K] |
| Color Rendering | 85 Ra8 |
| Index | |
| Color Designation | Incandescent White |
| (text) | |
| Color Temperature | 2700 K |
| Luminous Flux EL | 4450 Lm |
| 25°C, Rated | |
| Luminous Flux EL | 4450 Lm |
| 25°C, Nominal | |

| | |
|--------------------------------|---------|
| Luminous Flux Lamp | 5000 Lm |
| EL 35°C | |
| Lum Efficacy Rated | 82 Lm/W |
| HF 25°C | |
| Lum Efficacy Rated | 93 Lm/W |
| HF 35°C | |
| LLMF HF 2000h | 96 % |
| Rated | |
| LLMF HF 4000h | 95 % |
| Rated | |
| LLMF HF 6000h | 94 % |
| Rated | |
| LLMF HF 8000h | 93 % |
| Rated | |
| LLMF HF 12000h | 92 % |
| Rated | |
| LLMF HF 16000h | 91 % |
| Rated | |
| LLMF HF 20000h | 90 % |
| Rated | |
| Design Temperature | 35 C |
| Chromaticity Coord- inate X | 463 - |
| Chromaticity Coord- inate Y | 420 - |

• Electrical Characteristics

| | |
|-----------------|--------|
| Lamp Wattage | 54 W |
| Lamp Wattage EL | 54.1 W |
| 25°C, Rated | |
| Lamp Wattage EL | 54.0 W |
| 25°C, Nominal | |
| Lamp Wattage EL | 53.8 W |
| 35°C | |
| Lamp Voltage EL | 120 V |
| 25°C | |



MASTER TL5 High Output

| | |
|----------------------|---------|
| Lamp Voltage EL 35°C | 118 V |
| Lamp Current EL 25°C | 0.455 A |
| Lamp Current EL 35°C | 0.460 A |
| Dimmable | Yes |

• Environmental Characteristics

| | |
|-------------------------------|--------|
| Energy Efficiency Label (EEL) | A+ |
| Mercury (Hg) Content | 1.4 mg |
| Energy consumption kWh/1000h | 59 kWh |

• Measuring Conditions

| | |
|----------------------------|---------|
| Calibration Current | 0.460 A |
| HF Generator Rated Voltage | 235 V |
| Resistor | 255 ohm |



• Product Dimensions

| | |
|--------------------------|-------------------------------|
| Base Face to Base Face A | 1149.0 (max) mm |
| Insertion Length B | 1153.7 (min), 1156.1 (max) mm |
| Overall Length C | 1163.2 (max) mm |
| Diameter D | 17 (max) mm |

• Product Data

| | |
|-----------------------------|------------------------------|
| Order code | 927929082755 |
| Full product code | 927929082755 |
| Full product name | MASTER TL5 HO 54W/827 1SL |
| Order product name | MASTER TL5 HO 54W/827 1SL/40 |
| Pieces per pack | 1 |
| Packing configuration | 40 |
| Packs per outerbox | 40 |
| Bar code on pack - EAN1 | 8711500643148 |
| Bar code on outerbox - EAN3 | 8711500868510 |
| Logistic code(s) - 12NC | 927929082755 |
| ILCOS code | FDH-54/27/1B-L/P-G5-16/1150 |
| Net weight per piece | 104.500 gr |

Dimensional drawing


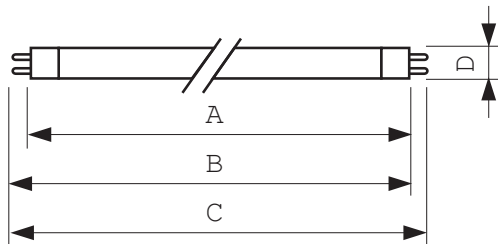


G5

MASTER TL5 HO 54W/827 1SL

| Product | A (Max) | B (Min) | B (Max) | C (Max) | D (Max) |
|----------------|---------|---------|---------|---------|---------|
| TL5 HO 54W/827 | 1149.0 | 1153.7 | 1156.1 | 1163.2 | 17 |

Photometric data

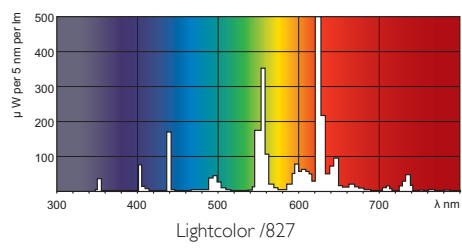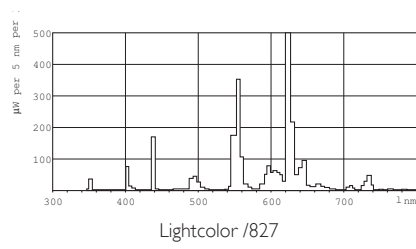

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 10
data subject to change