



# MASTER PL-L Polar 4 Pin

## MASTER PL-L Polar 36W/840/4P 1CT/25

MASTER PL-L Polar is a medium to high-wattage linear compact fluorescent lamp, typically used for lower-temperature applications such as outdoor lighting and cold storage. The original Philips-invented bridge technology guarantees optimum performance in the lower-temperature applications. It is designed for operation on electromagnetic as well as electronic HF control gear and is provided with a plug-in/pull-out lamp base.

### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Light Technical	
Cap-Base	2G11 [ 2G11]	LSF 8000 h Rated	94 %
Main Application	Low Temperature [ Low Temperature environment]	LSF 12000 h Rated	80 %
Life To 10% Failures (Nom)	10000 h	LSF Preheat 2000 h Rated	99 %
Life to 50% Failures (Nom)	15000 h	LSF Preheat 4000 h Rated	99 %
Life to 50% Failures Preheat (Nom)	20000 h	LSF Preheat 6000 h Rated	98 %
System Description	-	LSF Preheat 8000 h Rated	97 %
LSF 2000 h Rated	99 %	LSF Preheat 16000 h Rated	82 %
LSF 4000 h Rated	98 %	LSF Preheat 20000 h Rated	50 %
LSF 6000 h Rated	96 %	Color Code	840 [ CCT of 4000K]

## MASTER PL-L Polar 4 Pin

Luminous Flux (Nom)	2900 lm
Luminous Flux (Rated) (Nom)	2900 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	81 lm/W
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	94 %
LLMF 4000 h Rated	93 %
LLMF 6000 h Rated	92 %
LLMF 8000 h Rated	91 %
LLMF 12000 h Rated	90 %
LLMF 16000 h Rated	90 %
LLMF 20000 h Rated	90 %

### Operating and Electrical

Power (Nom)	36.0 W
Lamp Current (Nom)	0.445 A

### Temperature

Design Temperature (Nom)	18 °C
--------------------------	-------

### Controls and Dimming

Dimmable	Yes
----------	-----

### Mechanical and Housing

Cap-Base Information	4 Pins
----------------------	--------


### Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg
Energy Consumption kWh/1000 h	40 kWh

### Product Data

Full product code	871150026160140
Order product name	MASTER PL-L Polar 36W/840/4P 1CT/25
EAN/UPC - Product	8711500261601
Order code	927931084070
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927931084070
Net Weight (Piece)	104.000 g
ILCOS Code	FSD-36/40/1B-E-2G11

## Dimensional drawing




PL-L 36W/840/4P LT

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L Polar 36W/ 840/4P 1CT/25	39.0 mm	18.0 mm	385 mm	410 mm	416.6 mm

# MASTER PL-L Polar 4 Pin

## Photometric data

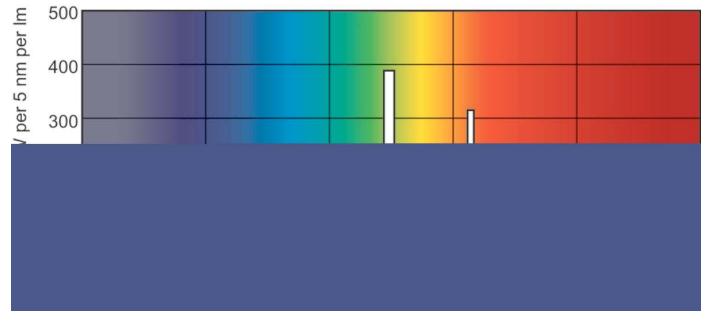

LDPB\_PLL4PLT\_840-Spectral power distribution B/W

LDPO\_PLL4PLT\_840-Spectral power distribution Colour

