



MASTER PL-S 4 Pin

MASTER PL-S 9W/830/4P 1CT/5X10BOX

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical	
Cap-Base	2G7 [2G7]	Correlated Color Temperature (Nom)	3000 K
Life to 50% Failures Preheat (Nom)	13000 h	Luminous Efficacy (rated) (Nom)	73 lm/W
LSF Preheat 2000 h Rated	99 %	Color Rendering Index (Nom)	82
LSF Preheat 4000 h Rated	98 %	LLMF 2000 h Rated	95 %
LSF Preheat 6000 h Rated	97 %	LLMF 4000 h Rated	92 %
LSF Preheat 8000 h Rated	92 %	LLMF 6000 h Rated	90 %
LSF Preheat 16000 h Rated	30 %	LLMF 8000 h Rated	88 %
		LLMF 12000 h Rated	86 %
Light Technical		Operating and Electrical	
Color Code	830 [CCT of 3000K]	Power (Nom)	8.6 W
Luminous Flux (Nom)	600 lm	Lamp Current (Nom)	0.170 A
Luminous Flux (Rated) (Nom)	583 lm		
Color Designation	Warm White (WW)		

MASTER PL-S 4 Pin

Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	4 Pins
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	9 kWh

Product Data	
Full product code	871150026093270
Order product name	MASTER PL-S 9W/830/4P 1CT/5X10BOX
EAN/UPC - Product	8711500260932
Order code	927936283011
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927936283011
Net Weight (Piece)	30.000 g
ILCOS Code	FSD-9/30/1B-E-2G7


Dimensional drawing




PL-S 9W/830/4P LM

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 9W/830/4P 1CT/5X10BOX	28 mm	13 mm	128 mm	145 mm	151.1 mm

Photometric data

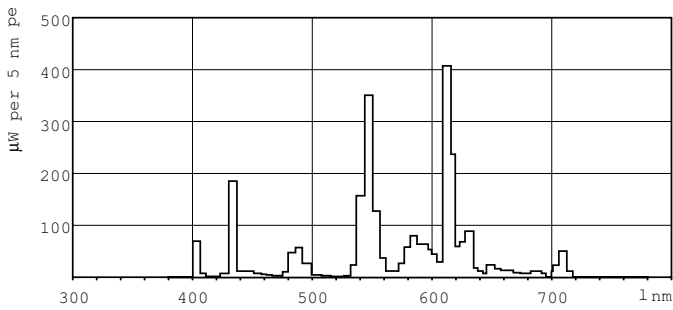


LDPB_PLS4PLM_830-Spectral power distribution B/W

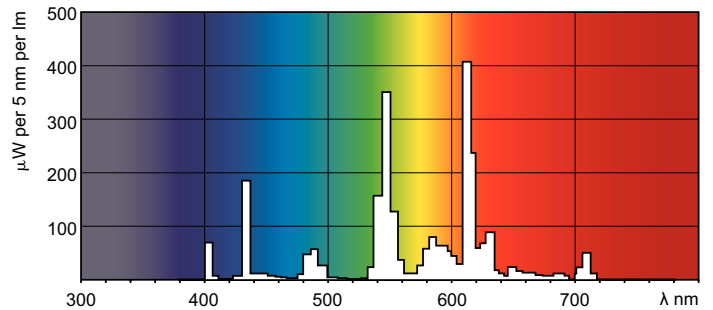

LDPO_PLS4PLM_830-Spectral power distribution Colour

MASTER PL-S 4 Pin

Lifetime

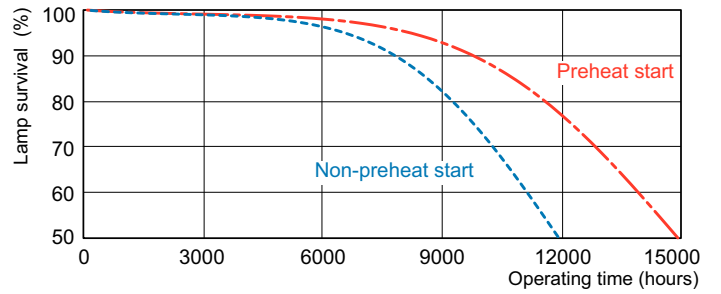

LDLE_PLS4PLM_0001-Life expectancy diagram

LDLE_PLS4PLM_0002-Life expectancy diagram



LDLM_PLS4PLM_0001-Lumen maintenance diagram

