



# MASTER TL5 High Efficiency Eco

MASTER TL5 HE Eco 32=35W/830 UNP

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HE Eco lamp offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

## Product data

### • General Characteristics

Cap-Base	G5
Bulb	T5 [16 mm]
Life to 10% fail	21000 hr
Preheat EL,3h	
Life to 50% fail	25000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	99 %
16000h Rated,3h	
LSF HF Preheat	94 %
20000h Rated,3h	

### • Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	85 Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Luminous Flux EL 25°C, Rated	3250 Lm
Luminous Flux EL 25°C, Nominal	3250 Lm
Luminous Flux Lamp EL 35°C	3650 Lm

Lum Efficacy Rated HF 25°C	103 Lm/W
Lum Efficacy Rated HF 35°C	111 Lm/W
LLMF HF 2000h Rated	96 %
LLMF HF 4000h Rated	95 %
LLMF HF 6000h Rated	94 %
LLMF HF 8000h Rated	93 %
LLMF HF 12000h Rated	92 %
LLMF HF 16000h Rated	91 %
LLMF HF 20000h Rated	90 %
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

### • Electrical Characteristics

Lamp Wattage	32 W
Lamp Wattage EL 25°C, Rated	31.7 W
Lamp Wattage EL 25°C, Nominal	32.0 W
Lamp Wattage EL 35°C	32.1 W
Lamp Voltage EL 25°C	190 V
Lamp Voltage EL 35°C	192 V



asimpleswitch.com

# PHILIPS

# MASTER TL5 High Efficiency Eco

Lamp Current EL 25°C	0.170 A
Lamp Current EL 35°C	0.170 A
Dimmable	Yes

## • Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	35 kWh

## • Measuring Conditions

Calibration Current	0.170 A
HF Generator Rated Voltage	392 V
Resistor	1200 ohm

## • Product Dimensions

Base Face to Base Face A	1449.0 (max) mm
--------------------------	-----------------

Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

## • Product Data



Order code	927991183031
Full product code	927991183031
Full product name	MASTER TL5 HE Eco 32=35W/830 UNP
Order product name	MASTER TL5 HE Eco 32=35W/830 UNP/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8711500880024
Bar code on outerbox - EAN3	8727900825923
Logistic code(s) - 12NC	927991183031
ILCOS code	FDH-32/30/1B-L/P-G5-16/1450
Net weight per piece	128.700 gr

## Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.

- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.

## Dimensional drawing


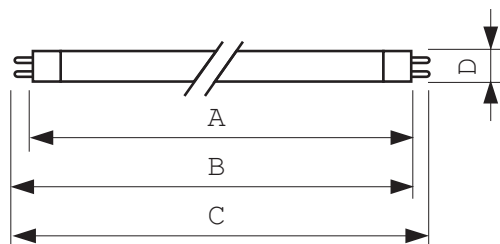


G5

## MASTER TL5 HE Eco 32=35W/830 UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HE Eco 32=35W/830	1449.0	1453.7	1456.1	1463.2	17

## Photometric data

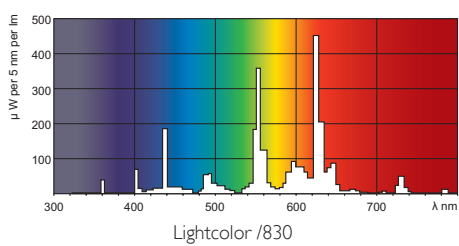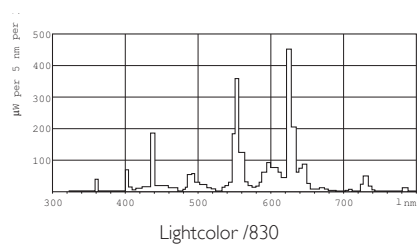

© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, April 10  
data subject to change