



# Blue (/52) TL/TL-D

## TL 20W/52 SLV/25

By emitting light almost entirely within the 400 to 500 nm bandwidth and peaking at 450 nm, Philips TL/TL-D color 52 lamps have no radiation from the short wave UVB. waveband. They are therefore suitable to be used in systems for applications such as Agriculture and Neonatal Jaundice Phototherapy

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take them to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Photobiological safety – IEC 62471 - Risk Group 2. CAUTION - Possibly hazardous optical radiation emitted from these products.

### Product data


General Information		Controls and Dimming	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Dimmable	No
Light Technical		Mechanical and Housing	
Color Code	52	Bulb Shape	T38 [T 38mm]
Luminous Flux	318 lumen		
Chromaticity Coordinate X (Nom)	154	Approval and Application	
Chromaticity Coordinate Y (Nom)	69	Mercury (Hg) Content (Nom)	8.0 mg
Operating and Electrical		Product Data	
Power Consumption	19.3 W	Full product code	871150064302540
Lamp Current (Nom)	0.36 A	Order product name	TL 20W/52 SLV/25
Voltage (Nom)	59 V	Order code	928003505203
Voltage (Nom)	59 V	Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	25
		Material number (12NC)	928003505203
		Full product name	TL 20W/52 SLV/25

# Blue (/52) TL/TL-D

EAN/UPC - Case


8711500643032

## Dimensional drawing

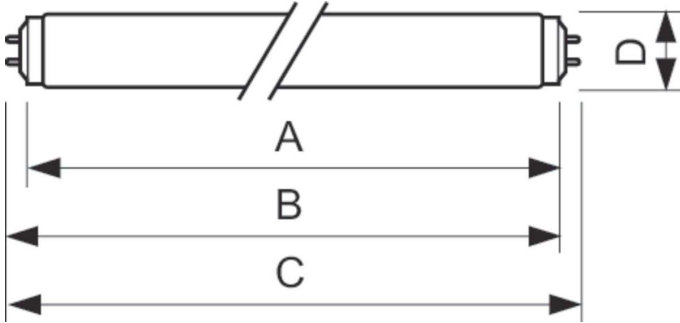

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 20W/52 SLV/25	40.5 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

## Photometric data

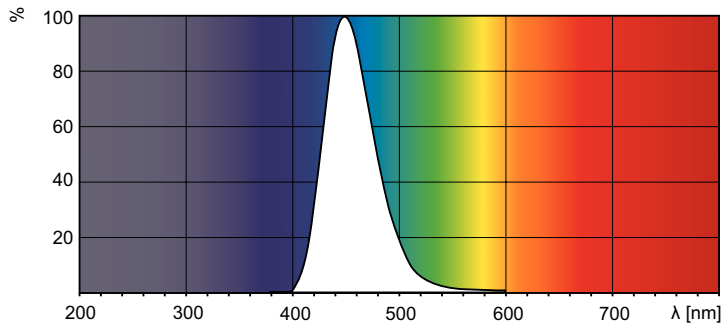

Spectral Power Distribution Colour - TL 20W/52 SLV/25

