



# Actinic BL TL-D(K) Secura

## Actinic BL TL-DK Secura 36W/10 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Main Application	Insect traps
Life to 50% Failures (Nom)	9000 h
Useful Life (Nom)	5000 h
Light Technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	225
Chromaticity Coordinate Y (Nom)	230
UV Depreciation at 2000 h	20 %


UV Depreciation at 5000 h	30 %
Operating and Electrical	
Power (Nom)	36 W
Lamp Current (Nom)	0.865 A
Voltage (Nom)	50 V
Approval and Application	
Mercury (Hg) Content (Nom)	8.0 mg
UV	
UV-B/UV-A (IEC)	0.2 %

# Actinic BL TL-D(K) Secura

UV-A Radiation 100Hr (IEC)	8.8 W
<b>Product Data</b>	
Full product code	872790086085600
Order product name	Actinic BL TL-DK Secura 36W/10 1SL/25
EAN/UPC - Product	8727900860856
Order code	928019801003

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928019801003
Net Weight (Piece)	127.500 g



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-DK Secura 36W/10 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

## TL-DK Secura 36W/10

## Photometric data

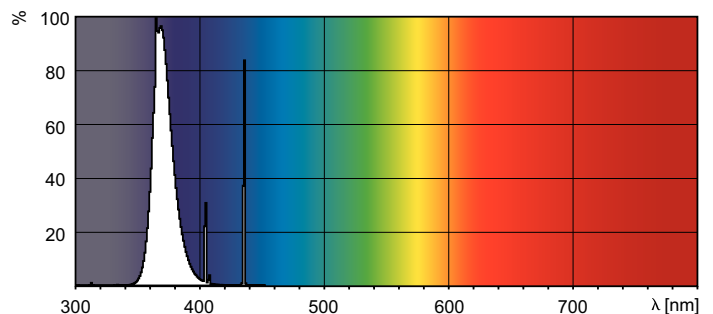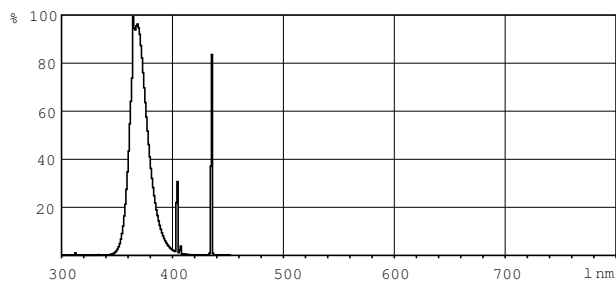

## XDPB\_XUATLDK\_10-Spectral power distribution B/W

## XDPO\_XUATLDK\_10-Spectral power distribution Colour

