



TL-M Rapid Start Standard Colours

TL-M RS 40W/54-765 1SL

The TL-M RS (Rapid Start) lamp (tube diameter 38 mm) has an external silicon coating and an external ignition strip. It is suitable for situations where low temperatures and high humidity require fast and stable ignition but color rendering is not important. Rapid Start lamps can be ignited without a starter.

Product data

• General Characteristics

System Description	Rapid Start
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T12 [38 mm]
Life to 50% failures EM	13000 hr

• Light Technical Characteristics

Color Code	54-765
Color Rendering Index	72 Ra8
Color Designation (text)	Cool Daylight
Color Temperature	6200 K
Luminous Flux Lamp EM	2500 Lm
Luminous Efficacy Lamp EM	63 Lm/W
Lumen Maintenance 2000h	90 %
Lumen Maintenance 5000h	81 %
Lumen Maintenance 10000h	73 %
Lumen Maintenance 15000h	69 %
Luminance Average EM	0.64 cd/cm ²
Chromaticity Coordinate X	315 -
Chromaticity Coordinate Y	341 -

• Electrical Characteristics

Lamp Wattage	40 W
--------------	------

Lamp Wattage EM	39.5 W
Lamp Voltage	101 V
Lamp Current EM	0.430 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	8.0 mg
Energy consumption kWh/1000h	47 kWh

• Product Dimensions

Base Face to Base Face A	1199.4 (max) mm
Insertion Length B	1204.1 (min), 1206.5 (max) mm
Overall Length C	1213.6 (max) mm
Diameter D	40.5 (max) mm

• Product Data

Order code	928030505471
Full product code	928030505471
Full product name	TL-M RS 40W/54-765 1SL
Order product name	TL-M RS 40W/54-765 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500724410
Bar code on outerbox - EAN3	8711500724427
Logistic code(s) - 12NC	928030505471

PHILIPS

TL-M Rapid Start Standard Colours

ILCOS code

FD-40/62/2A-LC/P-G13


Net weight per piece

275.600 gr

Dimensional drawing



TL-M RS 40W/54-765 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-M 40W/54-765 RS	1199.4	1204.1	1206.5	1213.6	40.5

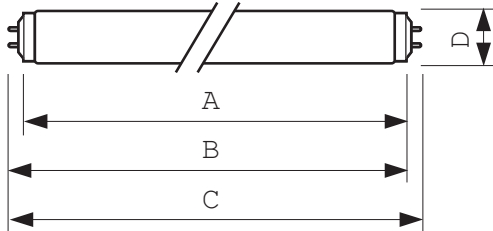

G13

Photometric data

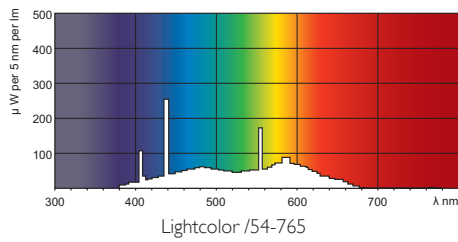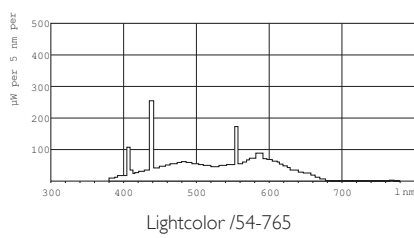

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 11
data subject to change