



# TL-X XL

## TL-X XL 40W/33-640 SLV/25

The TL-X XL lamp (tube diameter 38 mm) has an extended lifetime and is fitted with an internal ignition strip for electromagnetic starterless operation or high-frequency non-preheat operation. In combination with a special lampholder, all possible sparking effects during ignition are eliminated. This lamp is used in flameproof and increased-safety luminaires for both indoor and outdoor applications, such as the (petro-)chemical industry, offshore, mines and any location where traces of explosive gases may be found.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Color Rendering Index (Nom)	
Cap-Base	FA6 [ FA6]		63
Life To 10% Failures (Nom)	21000 h	<b>Operating and Electrical</b>	
Life to 50% Failures (Nom)	26000 h	Power (Nom)	39.0 W
		Lamp Current (Nom)	0.430 A
		Voltage (Nom)	103 V
		<b>Controls and Dimming</b>	
		Dimmable	Yes
		<b>Approval and Application</b>	
		Energy Efficiency Label (EEL)	B
		Mercury (Hg) Content (Nom)	12.0 mg
		Energy Consumption kWh/1000 h	47 kWh


# TL-X XL

## Product Data

Full product code	871150026137340
Order product name	TL-X XL 40W/33-640 SLV/25
EAN/UPC - Product	8711500261373
Order code	928037903332
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	25
Material Nr. (12NC)	928037903332
Net Weight (Piece)	233.000 g
ILCOS Code	FD-40/41/2B-LC/N-Fa6


## Dimensional drawing

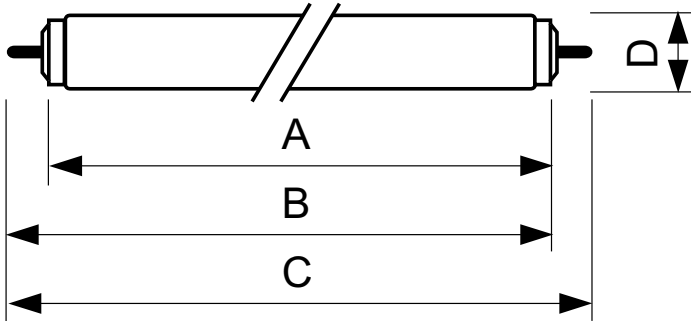

TL-X XL 40W/33-640

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-X XL 40W/33-640 SLV/25	40.5 mm	1183.5 mm	1202 mm	1198.5 mm	1220.5 mm

## Photometric data

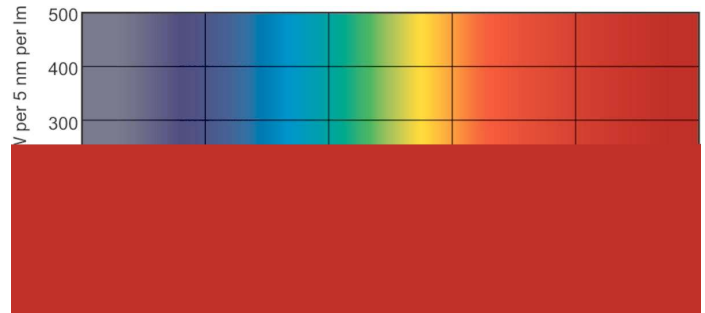

LDPB\_TL-X\_33-640-Spectral power distribution B/W

LDPO\_TL-X\_33-640-Spectral power distribution Colour

