PHILIPS

Lighting

MASTER TL-D 90 De Luxe

MASTER TL-D 90 De Luxe 36W/940 SLV/10

This TL-D lamp makes colors appear rich, deep and enhanced in a natural way. Thus very suitable for applications where a high color recognition is needed: first aid and treatment rooms in hospitals, printing rooms, jewelry, dentists, hairdressing, museums and shops

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

	Luminous Flux (Rated) (Nom)	2800 lm
G13 [Medium Bi-Pin Fluorescent]	Color Designation	Cool White (CW)
12000 h	Chromaticity Coordinate X (Nom)	381
15000 h	Chromaticity Coordinate Y (Nom)	379
20000 h	Correlated Color Temperature (Nom)	4000 K
99 %	Luminous Efficacy (rated) (Nom)	77.8 lm/W
99 %	Color Rendering Index (Nom)	91
99 %	LLMF 2000 h Rated	96 %
99 %	LLMF 4000 h Rated	95 %
89 %	LLMF 6000 h Rated	94 %
33 %	LLMF 8000 h Rated	93 %
2 %	LLMF 12000 h Rated	92 %
	LLMF 16000 h Rated	91 %
	LLMF 20000 h Rated	90 %
940 [CCT of 4000K]		
2800 lm		
	12000 h 15000 h 20000 h 99 % 99 % 99 % 99 % 89 % 33 % 2 % 940 [CCT of 4000K]	G13 [Medium Bi-Pin Fluorescent] Color Designation 12000 h Chromaticity Coordinate X (Nom) 15000 h Chromaticity Coordinate Y (Nom) 20000 h Correlated Color Temperature (Nom) 99 % Luminous Efficacy (rated) (Nom) 99 % Color Rendering Index (Nom) 99 % LLMF 2000 h Rated 99 % LLMF 4000 h Rated 33 % LLMF 6000 h Rated 2 % LLMF 12000 h Rated LLMF 12000 h Rated LLMF 12000 h Rated 940 [CCT of 4000K] Fated

MASTER TL-D 90 De Luxe

Operating and Electrical	
Power (Nom)	36.0 W
Lamp Current (Nom)	0.440 A
Temperature	
Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2 mg
Energy Consumption kWh/1000 h	43 kWh

Product Data		
Full product code	871150088858725	
Order product name	MASTER TL-D 90 De Luxe 36W/940 SLV/10	
EAN/UPC - Product	8711500888587	
Order code	928044594081	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	10	
Material Nr. (12NC)	928044594081	
Net Weight (Piece)	135.000 g	
ILCOS Code	FD-36/38/1A-E-G13	

Dimensional drawing

=		
	A	
	В	
	C	-


TL-D De Luxe 36W/940

Photometric data

 Product
 D (max)
 A (max)
 B (max)
 B (min)
 C (max)

 MASTER TL-D 90 De
 28 mm
 199.4 mm
 1206.5 mm
 1204.1 mm
 1213.6 mm

 Luxe 36W/940 SLV/10
 2
 2
 2
 2
 2
 2
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 3
 <td

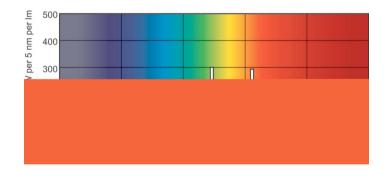



LDPB_TL-D9HLm_940-Spectral power distribution B/W

LDPO_TL-D9HLm_940-Spectral power distribution Colour


MASTER TL-D 90 De Luxe


Lifetime

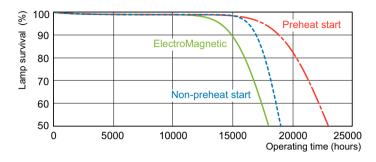



LDLE_TL-D9HLm_0001-Life expectancy diagram



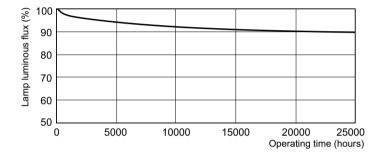

LDLM_TL-D9HLm_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.