



TL-D Colored

TL-D Colored 36W Green 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Life To 10% Failures (Nom)	12000 h			
Life to 50% Failures (Nom)	15000 h			
Life to 50% Failures Preheat (Nom)	20000 h			
Light Technical				
Color Code	170			
Luminous Flux (Nom)	4300 lm			
Luminous Flux (Rated) (Nom)	4300 lm			
Color Designation	Green (G)			
LLMF 2000 h Rated	90 %			
Operating and Electrical				
Power (Nom)	36.0 W			
Lamp Current (Nom)	0.440 A			

Voltage (Nom)	103 V				
Temperature					
Design Temperature (Nom)	25 °C				
Controls and Dimming					
Dimmable	Yes				
Approval and Application					
Energy Efficiency Label (EEL)	A+				
Mercury (Hg) Content (Nom)	1.7 mg				
Energy Consumption kWh/1000 h	42 kWh				
Product Data					
Full product code	871150064300140				
Order product name	TL-D Colored 36W Green 1SL/25				


Datasheet, 2020, March 19 data subject to change

TL-D Colored

EAN/UPC - Product	8711500643001
Order code	928048501705
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25


Material Nr. (12NC)	928048501705
Net Weight (Piece)	135.000 g

Dimensional drawing

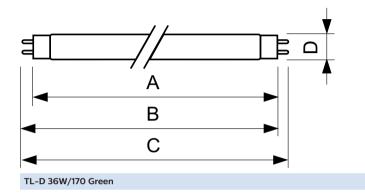

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 36W	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm
Green 1SL/25					

Photometric data



TL-DCOL 170



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.