



MASTERColour CDM-R Elite

MASTERColour CDM-R Elite 70W/942 E27 PAR30L 30D

Compact, very high-efficiency, long-life Ceramic Metal Halide discharge reflector lamp producing crisp white sparkling light with high color rendering

Warnings and Safety

- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap-Base	E27 [E27]	Beam Angle Technical (Min)	23 °
Operating Position	UNIVERSAL [Any or Universal (U)]	Luminous Flux (Rated) (Nom)	5200 lm
Life to 5% Failures (Nom)	9000 h	Luminous Intensity (Min)	10125 cd
Life To 10% Failures (Nom)	10000 h	Luminous Intensity (Nom)	13500 cd
Life to 20% Failures (Nom)	12000 h	Beam Description	Flood
Life to 50% Failures (Nom)	15000 h	Color Designation	Cool White (CW)
Switching Cycle	1350X	Lumen Maintenance 12000 h (Nom)	77 %
		Lumen Maintenance 2000 h (Nom)	90 %
		Lumen Maintenance 4000 h (Nom)	84 %
		Design Mean Lumens	4200 lm
Light Technical		Chromaticity Coordinate X (Nom)	0.372
Color Code	942 [CCT of 4200K]	Chromaticity Coordinate Y (Nom)	0.369
Beam Angle (Nom)	30 °	Correlated Color Temperature (Nom)	4200 K
Beam Angle Technical (Nom)	30 °	Luminous Efficacy (rated) (Nom)	71 lm/W
Beam Angle Technical (Max)	37 °		

MASTERCcolour CDM-R Elite

Color Rendering Index (Min)	89
Color Rendering Index (Nom)	92
LLMF At End Of Nominal Lifetime (Nom)	75 %
Luminous Flux in 90° Cone (Rated)	4500 lm

Operating and Electrical

Power (Nom)	73.2 W
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Warm Up Time to 60% Light (Nom)	120 s
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	82 V
Voltage (Nom)	90 V

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

Mechanical and Housing

Bulb Finish	Clear
-------------	-------

Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	6.5 mg
Energy Consumption kWh/1000 h	80 kWh


Luminaire Design Requirements

Bulb Temperature (Max)	300 °C
Cap-Base Temperature (Max)	200 °C

Product Data

Full product code	871829165167300
Order product name	MASTERCcolour CDM-R Elite 70W/942 E27 PAR30L 30D
EAN/UPC - Product	8718291651673
Order code	928053000630
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928053000630
Net Weight (Piece)	0.225 kg

Dimensional drawing




CDM-R Elite 70W/942 E27 PAR30L 30D

Product	D (max)	C (max)
MASTERCcolour CDM-R Elite 70W/942 E27 PAR30L 30D	97 mm	123 mm

MASTERCoulour CDM-R Elite

Photometric data

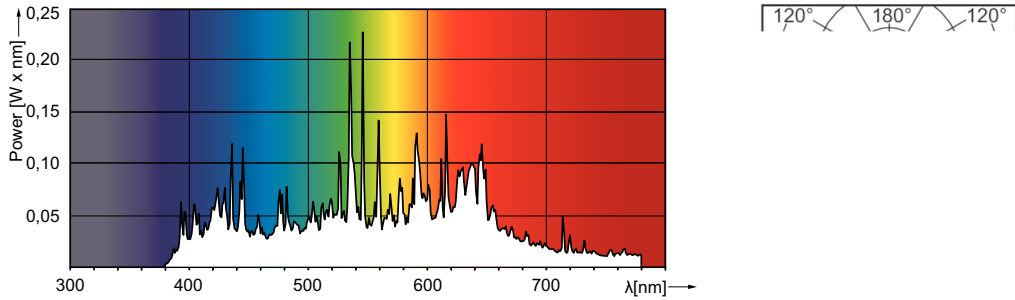

LDPO_CDM-R-E_0007-Spectral power distribution Colour

Lifetime

