



MSR Hot Restrike

MSR 125 HR 1CT

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Product data

• General Characteristics

System Description	Hot Restrike
Cap-Base	GZX9.5
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Studio/Theatre
Life to 50% failures	200 hr
EM	

• Light Technical Characteristics

Color Code	-
Color Rendering Index	92 Ra8
Color Temperature	6000 K
Color Temperature Technical	5600 K
Chromaticity Coordinate X	332 -
Chromaticity Coordinate Y	326 -
Luminous Flux Lamp EM	8000 (min), 9400 (nom) Lm
Luminous Efficacy Lamp EM	75 Lm/W

• Electrical Characteristics

Lamp Wattage	125 W
Lamp Wattage Technical	125 W
Lamp Current	1.9 A
Ignition Supply Voltage	207 (min) V

Dimmable Yes

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	700 (max) C

• Product Dimensions

Overall Length C	77 (max) mm
Diameter D	17 (max) mm
Width F	23 (min), 23.5 (nom), 24 (max) mm
Light Center Length L	38 (min), 39 (nom), 40 (max) mm
Arc Length O	4.0 mm


• Product Data

Order code	928060205114
Full product code	928060205114
Full product name	MSR 125 HR 1CT
Order product name	MSR 125 HR 1CT/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8727900922486
Bar code on outerbox - EAN3	8727900922493
Logistic code(s) - 12NC	928060205114
Net weight per piece	0.018 kg

PHILIPS


MSR Hot Restrike

Dimensional drawing

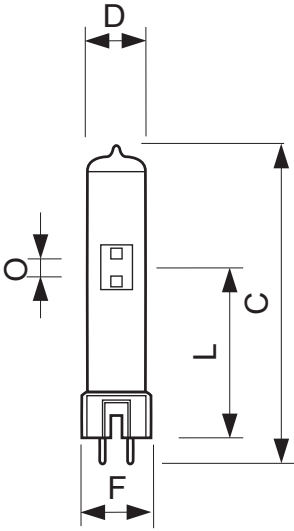


MSR 125 HR 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 125 HR	-	-	-	77	17	-	23	23.5	24	38	39	40	4.0




GZX9.5

Photometric data

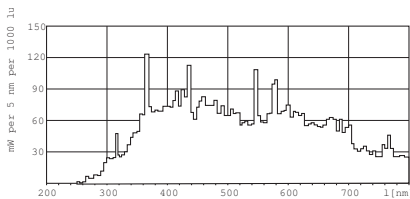

MSR 125, 200, 250, 400, 575, 1200 (C), 2500, 4000, 6000, 12000, 18000 HR

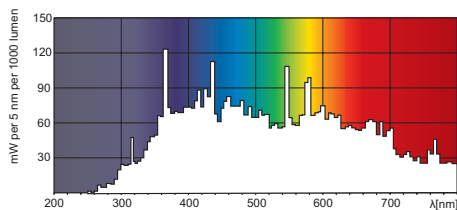

MSR Hot Restrike



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, June 21
data subject to change