



MASTERColour CDM-TD

MASTERColour CDM-TD 70W/942 RX7s 1CT/12

Range of double-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Lamps may use electronic or electromagnetic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap-Base	RX7S [RX7s]	Lumen Maintenance 2000 h (Min)	70 %
Operating Position	P45 [Parallel +/-45D or Horizontal(HOR)]	Lumen Maintenance 2000 h (Nom)	85 %
Life to 5% Failures (Nom)	9000 h	Lumen Maintenance 5000 h (Min)	60 %
Life To 10% Failures (Nom)	13000 h	Lumen Maintenance 5000 h (Nom)	70 %
Life to 20% Failures (Nom)	15000 h	Chromaticity Coordinate X (Nom)	0.383
Life to 50% Failures (Nom)	16000 h	Chromaticity Coordinate Y (Nom)	0.370
ANSI Code HID	M139/E	Correlated Color Temperature (Nom)	4200 K
		Luminous Efficacy (rated) (Nom)	76 lm/W
		Color Rendering Index (Min)	-
		Color Rendering Index (Nom)	92
Light Technical		Operating and Electrical	
Color Code	942 [CCT of 4200K]	Power (Nom)	71.5 W
Luminous Flux (Rated) (Nom)	5450 lm	Lamp Current Run-Up (Max)	1.4 A
Color Designation	Cool White (CW)		
Lumen Maintenance 10000 h (Nom)	60 %		

MASTERCcolour CDM-TD

Lamp Current (EM) (Nom)	0.98 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	82 V
Voltage (Nom)	90 V

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

Mechanical and Housing

Bulb Finish	Clear
-------------	-------

Approval and Application



Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	4.8 mg
Energy Consumption kWh/1000 h	78 kWh

Dimensional drawing



CDM-TD 70W/942 RX7s

Photometric data



UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.4

Luminaire Design Requirements

Bulb Temperature (Max)	500 °C
Pinch Temperature (Max)	280 °C



Product Data

Full product code	871150020002015
Order product name	MASTERCcolour CDM-TD 70W/942 RX7s 1CT/12
EAN/UPC - Product	8711500200020
Order code	928084705133
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928084705133
Net Weight (Piece)	21.000 g
ILCOS Code	MD/UB-70/942-H-RX7s-22/117.6

Product	D (max)	D	O	C (max)
MASTERCcolour CDM-TD 70W/942 RX7s 1CT/12	22 mm	0.75 in	7 mm	119.63 mm

MASTERCcolour CDM-TD

Lifetime

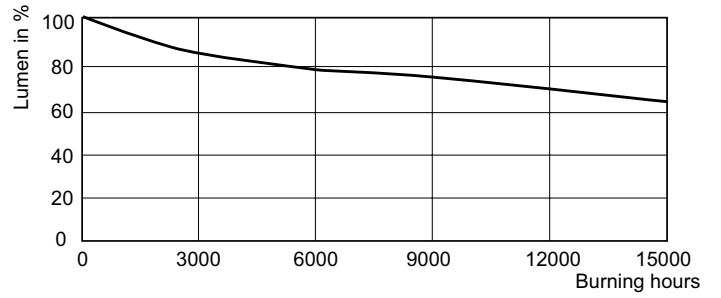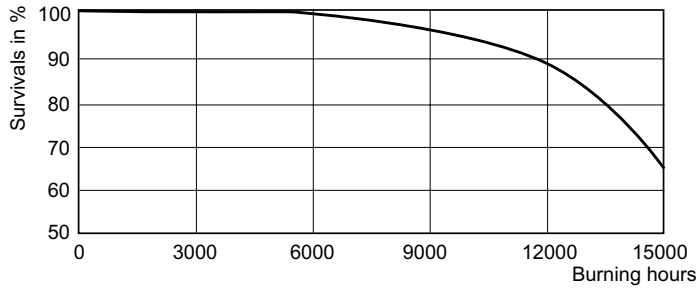

LDLM_CDM-TD_0001-Lumen maintenance diagram

