



MASTER MHN-SA

MASTER MHN-SA 1800W/956 230V XW UNP/1

Compact guartz metal halide lamps with double-pinch

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | | | | |
|------------------------------------|-------------------------------------------|--|--|--|--|
| Cap-Base | X830R [X830R] | | | | |
| Operating Position | P15 [Parallel +/-15D or Horizontal(HOR)] | | | | |
| Life to 5% Failures (Nom) | 1800 h | | | | |
| Life To 10% Failures (Nom) | 2300 h | | | | |
| Life to 20% Failures (Nom) | 3000 h | | | | |
| Life to 50% Failures (Nom) | 5000 h | | | | |
| | | | | | |
| Light Technical | | | | | |
| Color Code | 956 [CCT of 5600K] | | | | |
| Luminous Flux (Rated) (Nom) | 155000 lm | | | | |
| Color Designation | Daylight | | | | |
| Lumen Maintenance 1000 h (Nom) | 92 % | | | | |
| Lumen Maintenance 2000 h (Nom) | 80 % | | | | |
| Lumen Maintenance 5000 h (Nom) | 60 % | | | | |
| Chromaticity Coordinate X (Nom) | 330 | | | | |
| Chromaticity Coordinate Y (Nom) | 339 | | | | |
| Correlated Color Temperature (Nom) | 5600 K | | | | |
| Luminous Efficacy (rated) (Nom) | 86 lm/W | | | | |

| Color Rendering Index (Nom) | 86 |
|-------------------------------|--------------|
| | |
| Operating and Electrical | |
| Lamp supply voltage | 230 V [230] |
| Power (Nom) | 1800.0 W |
| Lamp Current Run-Up (Max) | 25 A |
| Lamp Current (EM) (Nom) | 17.3 A |
| Ignition Supply Voltage (Min) | 198 V |
| Voltage (Max) | 130 V |
| Voltage (Min) | 110 V |
| Voltage (Nom) | 120 V |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Bulb Finish | Clear |
| Cap-Base Information | - |
| | |


Datasheet, 2020, September 17 data subject to change

MASTER MHN-SA

| Approval and Application | | | |
|-------------------------------|-----------------|--|--|
| Energy Efficiency Label (EEL) | A+ | | |
| Mercury (Hg) Content (Nom) | 92 mg | | |
| Energy Consumption kWh/1000 h | 1980 kWh | | |
| | | | |
| Luminaire Design Requirements | | | |
| Bulb Temperature (Max) | 980 °C | | |
| Pinch Temperature (Max) | 300 °C | | |
| | | | |
| Product Data | | | |
| Full product code | 871150020106500 | | |


| Order product name | MASTER MHN-SA 1800W/956 230V XW UNP/ | | | | |
|---------------------------------|--------------------------------------|--|--|--|--|
| EAN/UPC - Product | 8718291548294 | | | | |
| Order code | 928099205130 | | | | |
| Numerator - Quantity Per Pack | 1 | | | | |
| Numerator - Packs per outer box | 1 | | | | |
| Material Nr. (12NC) | 928099205130 | | | | |
| Net Weight (Piece) | 110.000 g | | | | |
| ILCOS Code | MN-1800-H-X830R-/H | | | | |
| | | | | | |

Dimensional drawing

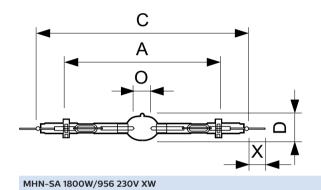

| Product | D (max) | 0 | X | Α | C (max) |
|-------------------------|---------|-------|-------|--------|---------|
| MASTER MHN-SA 1800W/956 | 41 mm | 25 mm | 25 mm | 318 mm | 369 mm |
| 230V XW UNP/1 | | | | | |


Photometric data

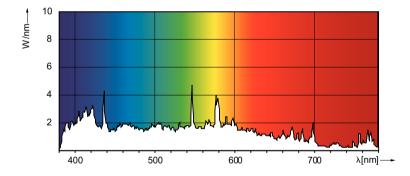

LDPO_MHN-SA_1800W_230V-Spectral power distribution Colour

MASTER MHN-SA

Lifetime

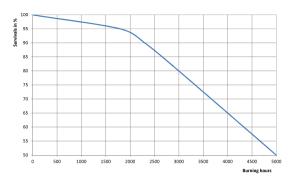



4000

4500 50

70 65

MHN SA 1800W 956 Life Expectancy Diagram





© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.