



# MSR Gold™ SA Double Ended

## MSR Gold™ 1200 SA/DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	SFC10-4 [ SFC10-4]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	Entertainment
Life to 50% Failures (Nom)	750 h
System Description	SA/DE

Light Technical	
Color Code	- [ Not Specified]
Luminous Flux (Min)	92700 lm
Luminous Flux (Nom)	103000 lm
Chromaticity Coordinate X (Nom)	326
Chromaticity Coordinate Y (Nom)	332

Operating and Electrical	
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	77 lm/W
Luminous Efficacy (rated) (Nom)	86 lm/W
Color Rendering Index (Nom)	85
Power (Nom)	1200 W
Lamp Current (Nom)	13.6 A
Ignition Supply Voltage (Min)	198 V

Controls and Dimming	
Dimmable	No

# MSR Gold™ SA Double Ended

## Mechanical and Housing

Cap-Base Information SFC10-4

## Product Data

Full product code 871829122121000  
 Order product name MSR Gold™ 1200 SA/DE 1CT/4  
 EAN/UPC - Product 8718291221210

Order code 928099605115


Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 4

Material Nr. (12NC) 928099605115

Net Weight (Piece) 34.000 g



## Dimensional drawing

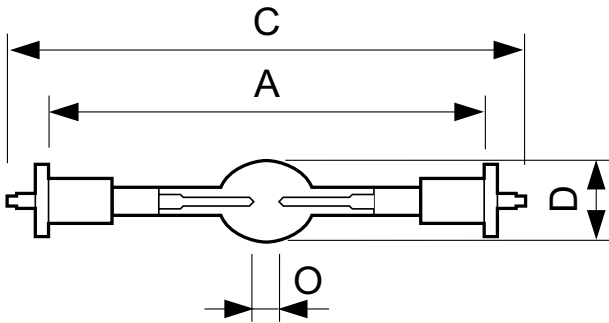

MSR GOLD 1200 SA/DE

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 1200 SA/DE 1CT/4	22 mm	7.0 mm	114.4 mm	115.2 mm	114.8 mm	136 mm

## Photometric data

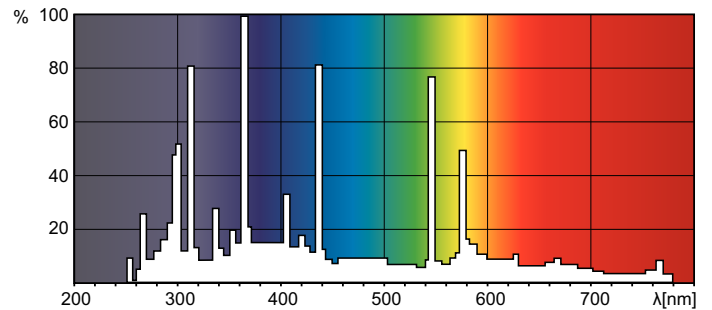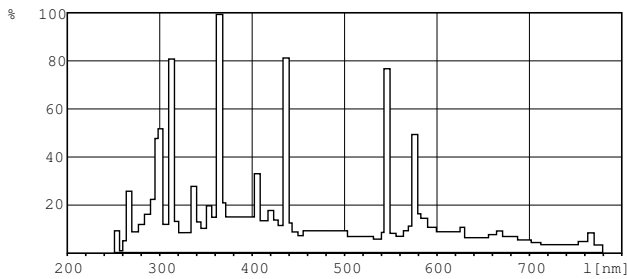

XDPO\_XDMSR\_SADE-Spectral power distribution Colour

