



MASTER SON-T APIA Plus Xtra

MASTER SON-T APIA Plus Xtra 400W E40 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb shape, high output and longest reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- HF gear must comply with Philips LDi guideline
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E40 [E40]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	28000 h
Life To 10% Failures (Nom)	32000 h
Life to 20% Failures (Nom)	36500 h
Life to 50% Failures (Nom)	45000 h
System Description	External Ignitor
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	99 %
LSF 20000 h Rated	99 %


Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Rated) (Nom)	55400 lm
Chromaticity Coordinate X (Nom)	525
Chromaticity Coordinate Y (Nom)	425
Correlated Color Temperature (Nom)	1950 K
Luminous Efficacy (rated) (Nom)	140.74 lm/W
Color Rendering Index (Max)	25
LLMF 2000 h Rated	99 %
LLMF 4000 h Rated	98 %
LLMF 6000 h Rated	97 %
LLMF 8000 h Rated	96 %
LLMF 12000 h Rated	96 %
LLMF 16000 h Rated	95 %
LLMF 20000 h Rated	94 %

MASTER SON-T APIA Plus Xtra

Ratio Scotopic/Photopic Lumens	0.60
Operating and Electrical	
Power (Nom)	394.0 W
Lamp Current (EM) (Nom)	0.455 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	120 s
Ignition Time (Max)	10 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	97 V
Controls and Dimming	
Dimmable	Yes
Run-Up Time 90% (Max)	5 min
Mechanical and Housing	
Bulb Finish	Clear
Approval and Application	
Energy Efficiency Label (EEL)	A++

Mercury (Hg) Content (Nom)	20 mg
Energy Consumption kWh/1000 h	433 kWh
Luminaire Design Requirements	
Bulb Temperature (Max)	450 °C
Cap-Base Temperature (Max)	250 °C
Product Data	
Full product code	872790092741200
Order product name	MASTER SON-T APIA Plus Xtra 400W E40 1SL/12
EAN/UPC - Product	8727900927412
Order code	928150519227
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928150519227
Net Weight (Piece)	0.175 kg
ILCOS Code	ST-400-H/E-E40

Dimensional drawing





SON-T APIA Plus Xtra 400W E40

Product	D (max)	O	L	C (max)
MASTER SON-T APIA Plus Xtra 400W E40 1SL/12	48 mm	83 mm	175 mm	283 mm

MASTER SON-T APIA Plus Xtra



Photometric data

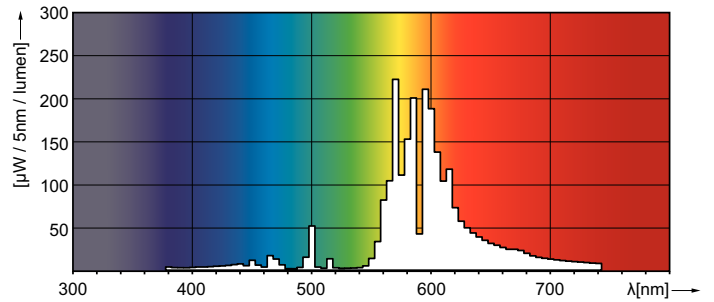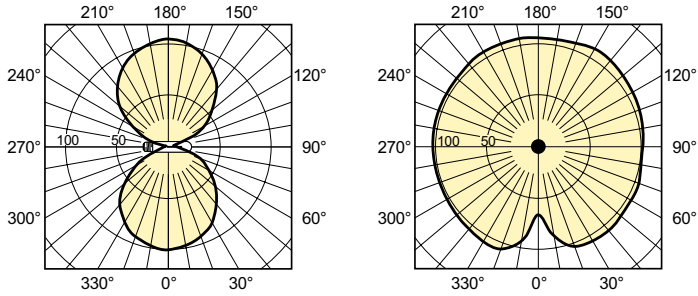

LDLD_SONTAPIA-Light distribution diagram

LDPO_SONTAPIA_0003-Spectral power distribution Colour

Lifetime

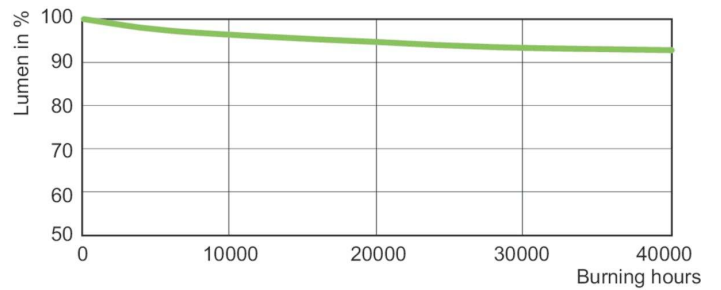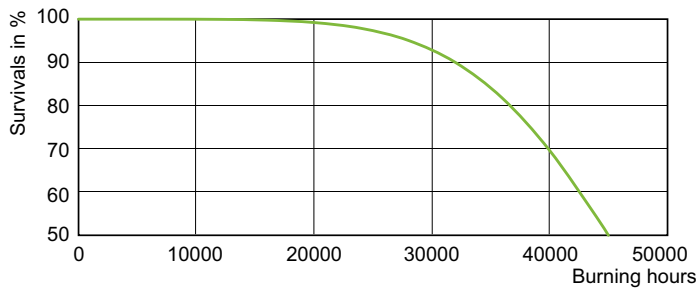

LDLE_SONTAPIA_0005-Life expectancy diagram

LDLM_SONTAPIA_0001-Lumen maintenance diagram

