



# MASTER SON PIA Plus

## MASTER SON PIA Plus 150W/220 E40 1SL/12

High Pressure Sodium lamp with opalized ovoid outer bulb, high output and long reliable lifetime

### Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	E40 [ E40]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life to 5% Failures (Nom)	20500 h
Life To 10% Failures (Nom)	24000 h
Life to 20% Failures (Nom)	28000 h
Life to 50% Failures (Nom)	36000 h
System Description	External Ignitor
LSF 2000 h Rated	100 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	98 %
LSF 20000 h Rated	95 %

Light Technical	
Color Code	220 [ CCT of 2000K]
Luminous Flux (Rated) (Nom)	16600 lm
Chromaticity Coordinate X (Nom)	535
Chromaticity Coordinate Y (Nom)	420
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	107.79 lm/W
Color Rendering Index (Max)	25
LLMF 2000 h Rated	99 %
LLMF 4000 h Rated	98 %
LLMF 6000 h Rated	97 %
LLMF 8000 h Rated	96 %
LLMF 12000 h Rated	96 %
LLMF 16000 h Rated	95 %
LLMF 20000 h Rated	94 %
Ratio Scotopic/Photopic Lumens	0.55

# MASTER SON PIA Plus

## Operating and Electrical

Power (Nom)	154 W
Lamp Current (EM) (Nom)	0.178 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	2800 V
Re-Ignition Time (Min) (Max)	180 s
Ignition Time (Max)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	100 V

## Controls and Dimming

Dimmable	Yes
Run-Up Time 90% (Max)	4 min

## Mechanical and Housing

Bulb Finish	Coated glass
-------------	--------------

## Approval and Application

Energy Efficiency Label (EEL)	A+
-------------------------------	----

Mercury (Hg) Content (Nom)	15 mg
Energy Consumption kWh/1000 h	169 kWh


## Luminaire Design Requirements

Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	250 °C

## Product Data

Full product code	871150018228915
Order product name	MASTER SON PIA Plus 150W/220 E40 1SL/12
EAN/UPC - Product	8711500182289
Order code	928151409827
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928151409827
Net Weight (Piece)	0.156 kg
ILCOS Code	SE-150-H/S-E40


## Dimensional drawing




SON PIA Plus 150W/220 E40

Product	D (max)	C (max)
MASTER SON PIA Plus 150W/220 E40 1SL/12	91 mm	227 mm

## Photometric data

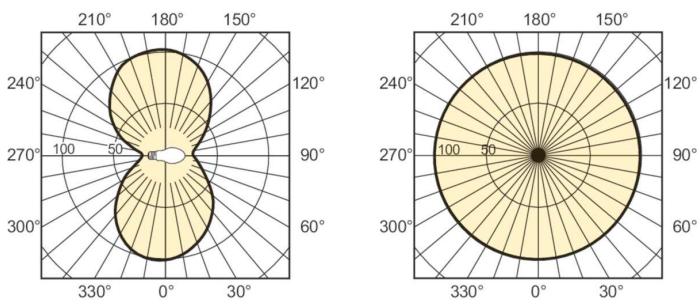



LDLD\_SON-PIA\_0001-Light distribution diagram

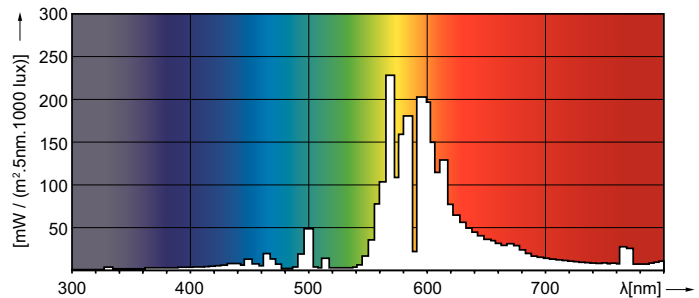

LDPO\_SON-PIA\_0001-Spectral power distribution Colour

# MASTER SON PIA Plus

## Lifetime

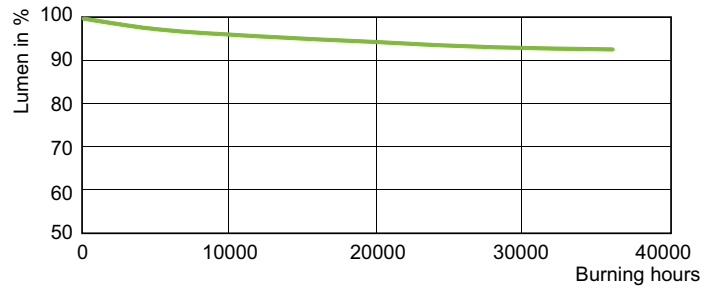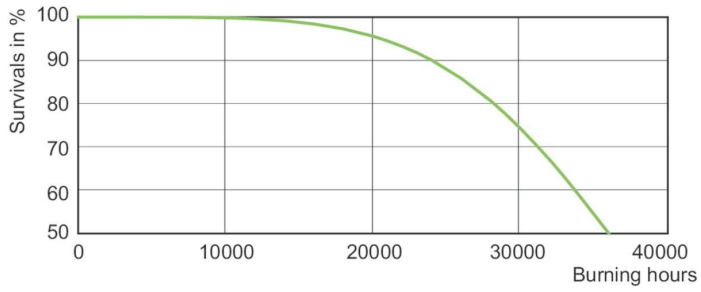

LDLE\_SON-PIA\_0004-Life expectancy diagram

LDLM\_SON-PIA\_0004-Lumen maintenance diagram

