



MASTERColour CDM-TC

MASTERColour CDM-TC 20W/830 G8.5 1CT

Range of single-ended, very compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Product data

• General Characteristics

Cap-Base	G8.5
Bulb	T14 [T 14 mm]
Bulb Material	UV-Block Quartz
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	9000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EL	12000 hr
Life to 50% failures EL	15000 hr

• Light Technical Characteristics

Color Code	830 [CCT of 3000K]
Color Rendering Index	82 (min), 85 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	2980 K
Color Temperature Technical	2980 K
Luminous Flux Lamp EL	1800 Lm
Luminous Efficacy Lamp EL	90 Lm/W
Lumen Maintenance EL 2000h	87 %
Lumen Maintenance EL 5000h	83 %
Lumen Maintenance EL 10000h	78 %
Lumen Maintenance EL 12000h	77 %

Design Mean Lumens EL	1400 Lm
Chromaticity Coordinate X	0.434 -
Chromaticity Coordinate Y	0.391 -

• Electrical Characteristics

System Power EL	23.5 W
Lamp Wattage	20 W
Lamp Wattage EL	20.0 W
25°C, Rated	
Lamp Wattage EL	20.0 W
25°C, Nominal	
Lamp Voltage	94 V
Lamp Current EL	0.215 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	3.5 mg
Energy consumption kWh/1000h	22 kWh

• UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.4 (max) - 8 (min) h500lx
--------------------------------	----------------------------

PHILIPS

• Luminaire Design Requirements

Pinch Temperature	300 (max) C
Bulb Temperature	320 (max) C

• Product Dimensions

Overall Length C	85 (max) mm
Diameter D	15 (max) mm
Light Center Length L	51 (min), 52 (nom), 53 (max) mm
Arc Length O	4 mm
Overall Length C [inch]	3.346 (max) in
Diameter D [inch]	0.55 in

• Product Data

Order code	928183405125
------------	--------------


Full product code	928183405125
Full product name	MASTERColour CDM-TC 20W/830 G8.5 1CT
Order product name	MASTERC CDM-TC 20W/830 G8.5 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900871586
Bar code on outerbox - EAN3	8727900871593
Logistic code(s) - 12NC	928183405125
ILCOS code	MT/UB-20/830-H-G8.5-17/85
Net weight per piece	9.000 gr

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.


Dimensional drawing

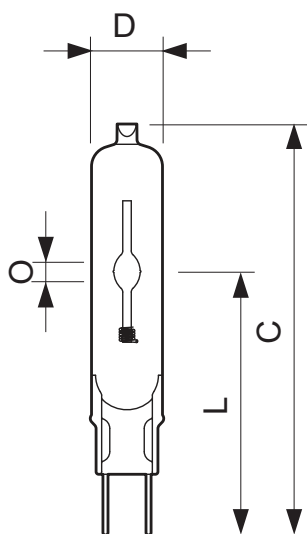

MASTERColour CDM-TC 20W/830 G8.5 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-TC 20W/830 G8.5	85	15	51	52	53	4

Dimensional drawing




G8.5

Photometric data

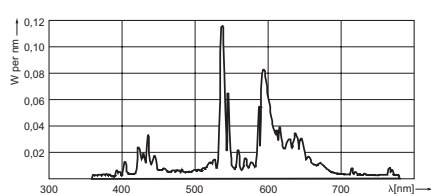

MASTERColour CDM-TC 20W /830

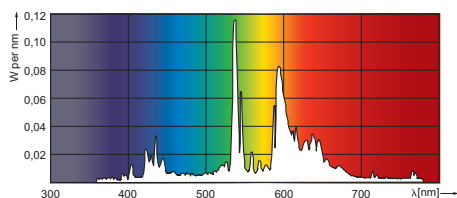

MASTERColour CDM-TC 20W /830



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 10
data subject to change