

# MASTERCcolour CDM-T Elite

MASTERCcolour CDM-T Elite 50W/930 G12 1CT

Single-ended, very high-efficiency, long-life Ceramic Metal Halide discharge lamp producing crisp white sparkling light with high color rendering



## Product data

### • General Characteristics

Cap-Base	G12
Bulb	T19 [T 19mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	9000 hr
Life to 10% failures EL	10000 hr
Life to 20% failures EL	12000 hr
Life to 50% failures EL	15000 hr

### • Light Technical Characteristics

Color Code	930 [CCT of 3000K]
Color Rendering Index	87 (min), 90 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	3000 K
Color Temperature Technical	2970 K
Luminous Flux Lamp EL	5400 Lm
Luminous Efficacy Lamp EL	108 Lm/W
Lumen Maintenance EL 1000h	97 %
Lumen Maintenance EL 2000h	95 %
Lumen Maintenance EL 4000h	90 %
Lumen Maintenance EL 5000h	88 %
Lumen Maintenance EL 8000h	87 %

Lumen Maintenance EL 10000h	83 %
Lumen Maintenance EL 12000h	82 %
Lumen Maintenance EL 15000h	80 %
Design Mean Lumens EL	4750 Lm
Chromaticity Coordinate X	0.435 -
Chromaticity Coordinate Y	0.396 -

### • Electrical Characteristics

System Power EL	56 W
Lamp Wattage	50 W
Lamp Wattage EL 25°C, Rated	50.0 W
Lamp Wattage EL 25°C, Nominal	50.0 W
Lamp Voltage	90 V
Lamp Current EL	0.57 A
Ignition Time	30 (max) s
Run-up time 90%	3 (max) min
Re-ignition Time [min]	15 (max) min
Dimmable	No

### • Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	6.4 mg
Energy consumption kWh/1000h	55 kWh



asimpleswitch.com

# PHILIPS

## • UV-related Characteristics

Damage Factor D/fc PET (NIOSH)	0.3 (max) - 8 (min) h500lx
-----------------------------------	-------------------------------

## • Luminaire Design Requirements

Cap-Base Temperature	250 (max) C
Pinch Temperature	350 (max) C
Bulb Temperature	500 (max) C

## • Product Dimensions

Reference Length A	90 (max) mm
Overall Length C	103 (max) mm
Diameter D	20 (max) mm
Light Center Length L	55 (min), 56 (nom), 57 (max) mm
Arc Length O	6 mm
Light Center Length L [inch]	2.16 (min), 2.20 (nom), 2.24 (max) in

Overall Length C [inch]	4 (max) in
Diameter D [inch]	0.79 (max) in

## • Product Data


Order code	928191705131
Full product code	928191705131
Full product name	MASTERColour CDM-T Elite 50W/930 G12 1CT
Order product name	MASTERC CDM-T Elite 50W/930 G12 1CT/12
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900930603
Bar code on outerbox - EAN3	8727900930610
Logistic code(s) - 12NC	928191705131
ILCOS code	MT/UB-50/930-H-G12-20/90
Net weight per piece	0.030 kg

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures

- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)


## Dimensional drawing

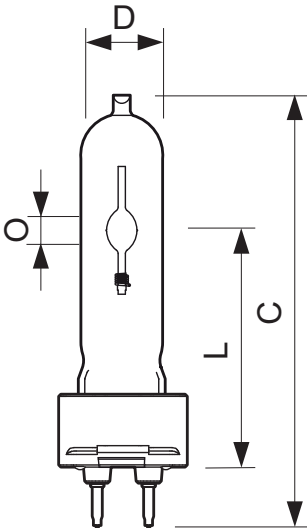

## MASTERColour CDM-T Elite 50W/930 G12 1CT


Product	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
CDM-T ACCENT 50W/930 G12	103	20	55	56	57	6

## Dimensional drawing



G12

## Photometric data

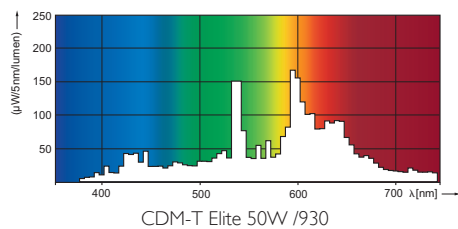

© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, April 22  
data subject to change