



# LED PAR30 S/L

## 12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

### Product data

General information	
Cap-Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12-75W
Light technical	
Color Code	930 [ CCT of 3000K]
Beam Angle (Nom)	25 °
Luminous Flux (Nom)	880 lm
Luminous Intensity (Nom)	4500 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	73 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	60 Hz
Power (Nom)	12 W
Lamp Current (Nom)	120 mA
Wattage Equivalent	90 W


Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Bulb Finish	Clear
Bulb Material	Plastic
Bulb Shape	PAR30L [ PAR 3.75 inch/95mm Long]
Approval and application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	Energy Star
Product data	
Order product name	12PAR30L/EXPERTCOLOR RETAIL/ F25/930/DIM

# LED PAR30 S/L

EAN/UPC - Product	046677471040
Order code	929001285704
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6

Material Nr. (12NC)	929001285704
Net Weight (Piece)	0.285 kg


## Dimensional drawing

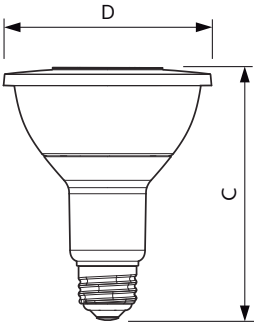


12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM

Product	D	C
12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	94.8 mm	116.1 mm


## Photometric data

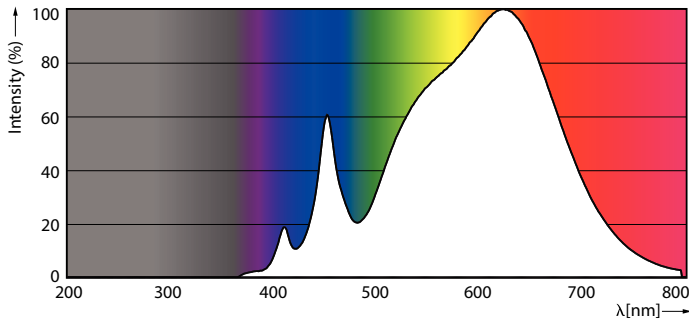

PAR38 120V 17-90W 1200lm 8D 3000K E26 D

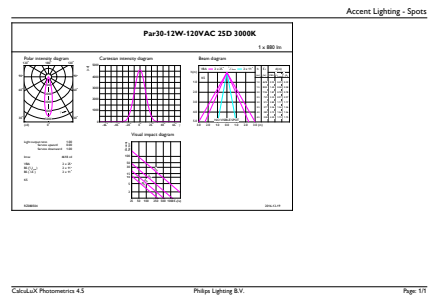

PAR30L 120V 12-75W 900lm 25D 3000K E26 D



PAR30L 120V 12-75W 900lm 25D 3000K E26 D

# LED PAR30 S/L

## Lifetime



ExpertColor PAR38 30S 30L Dim 120V Life Expectancy Diagram

ExpertColor PAR38 30S 30L Dim 120V Lumen Maintenance Diagram

