



Essential LED tubes T5 Mains

CorePro LEDtube 1200mm 16W830 G5 I MX

The Essential LEDtube T5 is an affordable LED solution suitable for replacing T5 fluorescent lamps. Thanks to a unique design, Philips Essential LED tube T5 Mains can be directly installed in luminaires operating on mains power connection. The product provides a natural lighting effect for use in general lighting applications, as well as instant energy savings – an environmentally friendly solution.

Product data

General information	
Cap-Base	G5 [G5]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	30000 h
Switching Cycle	50000X
Light technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	200 °
Luminous Flux (Nom)	2000 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	115.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	16 W


Lamp Current (Max)	175 mA
Lamp Current (Min)	70 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.92
Voltage (Nom)	100-240 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	70 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Product Length	1200 mm

Essential LED tubes T5 Mains

Bulb Shape	Tube, double-ended
Approval and application	
Energy Saving Product	Yes
Approval Marks	CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	- kWh
Product data	
Full product code	871869673416200

Order product name	CorePro LEDtube 1200mm 16W830 G5 I MX
EAN/UPC - Product	8718696734162
Order code	929001380912
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	20
Material Nr. (12NC)	929001380912
Net Weight (Piece)	0.120 kg


Dimensional drawing

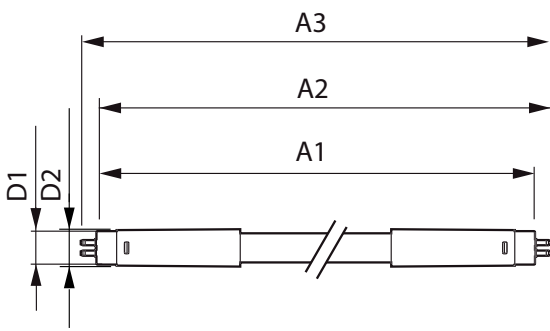


CorePro LEDtube 1200mm 16W830 G5 I MX

Product	D1	D2	A1	A2	A3
CorePro LEDtube 1200mm 16W830 G5 I MX	15.8 mm	19 mm	1149 mm	1156.1 mm	1163.2 mm

Photometric data




ESSENTIAL LEDtube 16W G5 830 APR

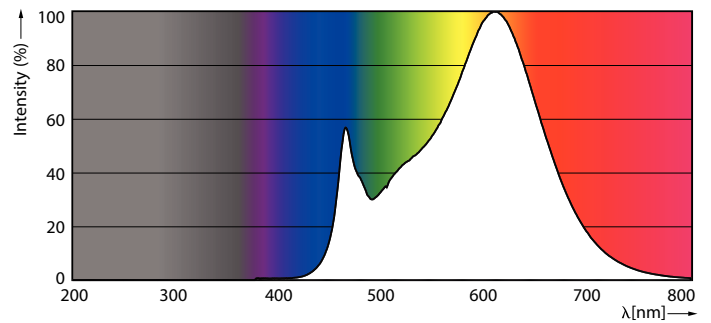

ESSENTIAL LEDtube 16W G5 830 APR


Essential LED tubes T5 Mains

Photometric data

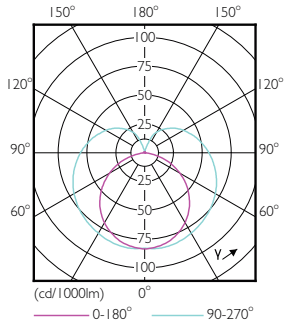


ESSENTIAL LEDtube 16W G5 830 APR


Lifetime

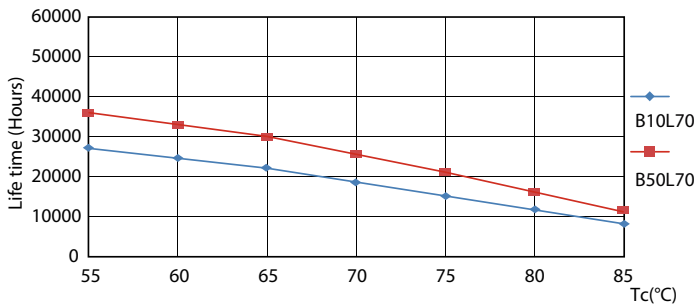


ESSENTIAL LEDtube 8-16W G5 830-865 APR

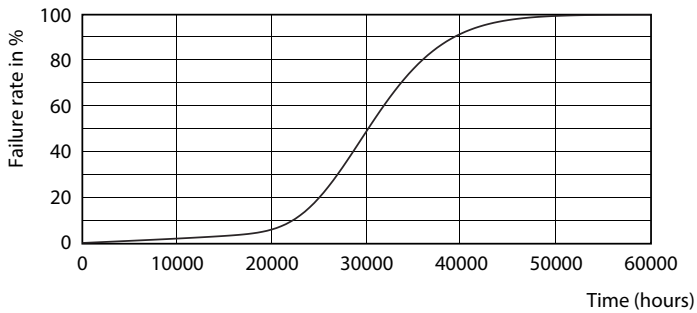

ESSENTIAL LEDtube 8-16W G5 830-865 APR

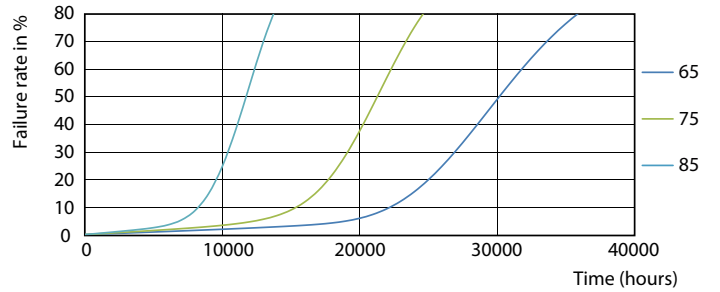


ESSENTIAL LEDtube 8-16W G5 830-865 APR

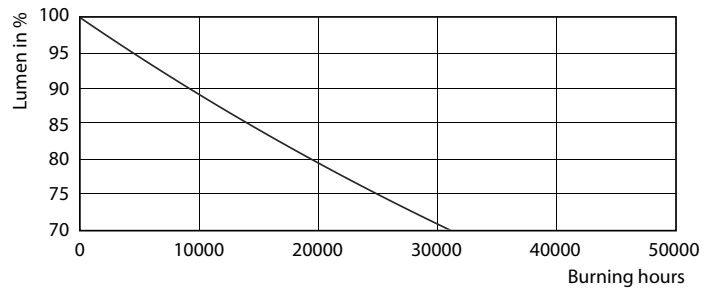

ESSENTIAL LEDtube 8-16W G5 830-865 APR

Essential LED tubes T5 Mains

Lifetime

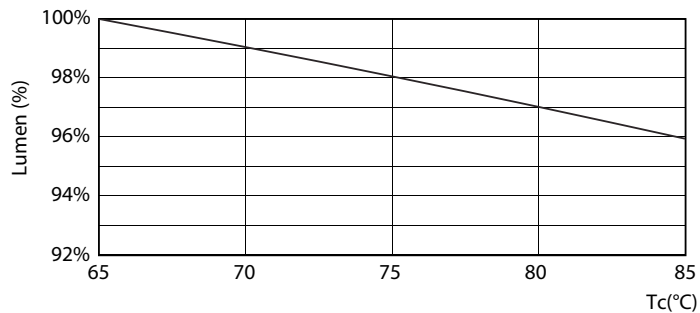

ESSENTIAL LEDtube 16W G5 830-865 APR

