



MASTER LEDtube InstantFit HF T5

Master LEDtube HF 1500mm HE 20W 830 T5

The Philips MASTER LEDtube integrates an LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescents. These T5 lighting tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings, thanks to low energy consumption and an exceptionally long lifetime, make these T5 LED tubes the choice for every demanding applications.

Product data

General information	
Cap base	G5 [G5]
CE mark	Yes
EU RoHS compliant	Yes
Nominal lifetime	60,000 h
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere

Light technical	
Colour Code	830 [CCT of 3000K]
Beam angle (nom.)	200 degree(s)
Luminous Flux	2,800 lm
Colour designation	White (WH)
Correlated Colour Temperature	3000 K
Luminous Efficacy (rated) (Nom)	140.00 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80

LLMF at end of nominal lifetime (nom.) 70 %	
---	--

Operating and electrical	
Line Frequency	30K to 100K Hz
Input frequency	30 K to 100 K Hz
Power Consumption	20 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.92
Voltage (nom.)	80-130 V

Temperature	
T-Case maximum (nom.)	65 °C

Controls and dimming	
Dimmable	Yes – Check ballast compatibility

MASTER LEDtube InstantFit HF T5

Mechanical and housing

Lamp Finish	Frosted
Bulb material	Glass
Product length	1,500 mm
Bulb shape	Tube, double-ended


Approval and application

Energy-saving product	Yes
Approval marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy consumption kWh/1,000 hours	20 kWh
EPREL registration number	1,384,137

Product data



Full EOC	871869674335500
Order product name	MAS LEDtube HF 1500mm HE 20W 830 T5
Order code	74335500
SAP numerator – quantity per pack	1
Numerator – packs per outer box	10
Material number (12NC)	929001391302
Net weight	0.196 kg
Full product name	Master LEDtube HF 1500mm HE 20W 830 T5
EAN/UPC – Case	8718696743362

Dimensional drawing

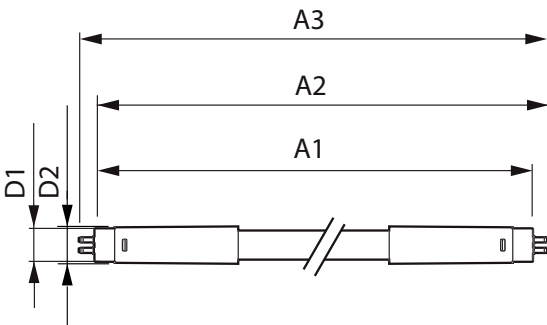

Product	D1	D2	A1	A2	A3
MAS LEDtube HF 1500mm HE 20W 830 T5	15.5 mm	18.8 mm	1,449 mm	1,456.1 mm	1,463.2 mm


Photometric data

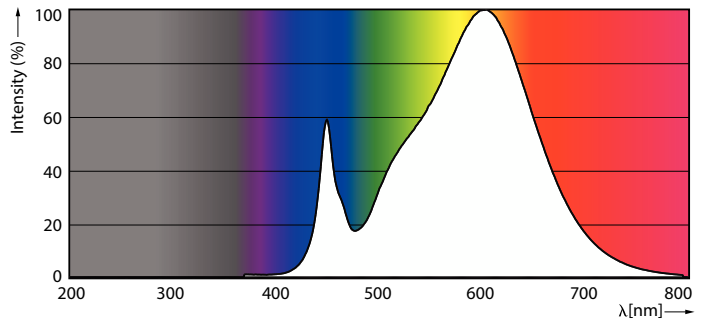

Spectral Power Distribution Colour - MAS LEDtube HF 1500mm HE 20W 830 T5


MASTER LEDtube InstantFit HF T5

Photometric data

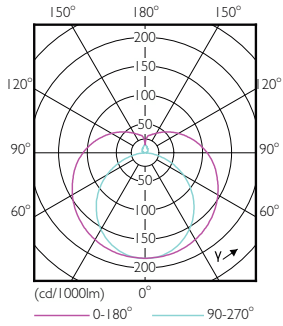


Light Distribution Diagram - MAS LEDtube HF 1500mm HE 20W 830 T5


Lifetime

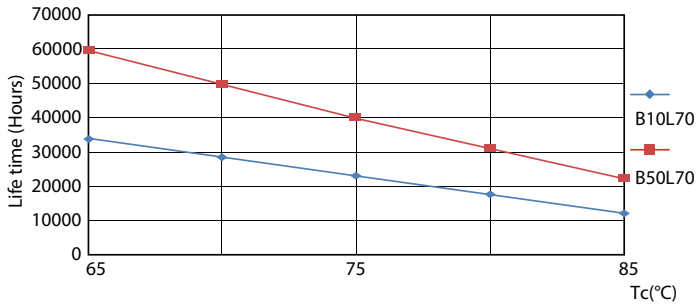


Life Expectancy Diagram - MAS LEDtube HF 1500mm HE 20W 830 T5

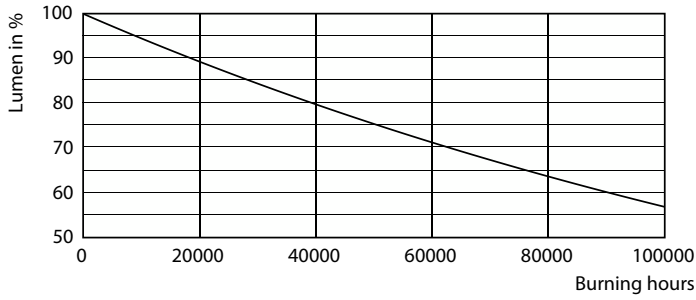

Lumen Maintenance Diagram - MAS LEDtube HF 1500mm HE 20W 830 T5

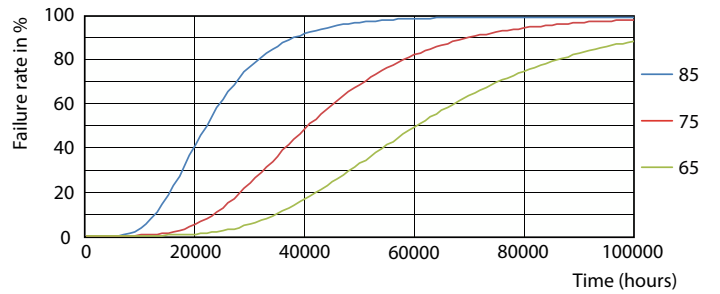


Life Expectancy Diagram - MAS LEDtube HF 1500mm HE 20W 830 T5

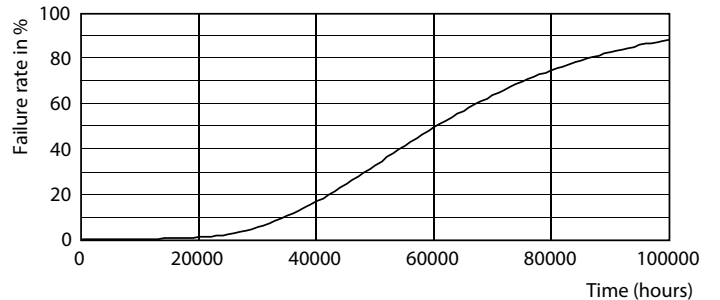

Life Expectancy Diagram - MAS LEDtube HF 1500mm HE 20W 830 T5

MASTER LEDtube InstantFit HF T5

Lifetime

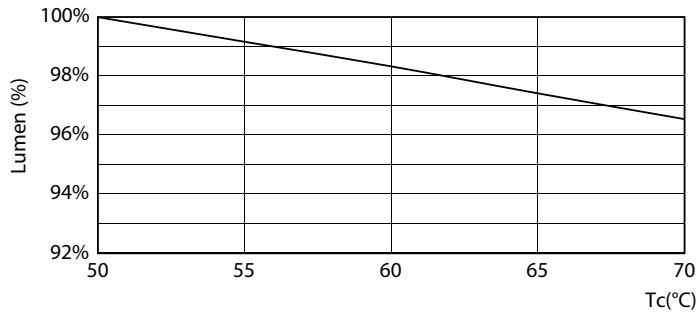

Lumen Maintenance Diagram - MAS LEDtube HF 1500mm HE 20W 830 T5

