

PHILIPS

CertaFlux

LED

CertaFlux LED Strip
1ft 1100lm HV4



Datasheet

CertaFlux LED Strip

Generation 4 of the Certaflux LED Strip is designed to provide a better efficiency without sacrificing its other success factors as lifetime and light quality. The Certaflux LED Strip is an ideal product for several different applications: office, industry and waterproof.

Key features and benefits

- LED module efficiency up to 165 lm/W
- Long life-time: >50,000 hours
- Good color rendering, CRI: >80
- Color consistency of 3 SDCM
- Color temperatures of 3000 K, 4000 K and 6500 K
- One-foot (280mm) and two-foot (560mm) lengths available
- Two lumen packages: 775lm per foot and 1100lm per foot
- PCB width is only 20mm
- Wide temperature range (Tc) from -40°C to +85°C
- Push-in connectors enable automatic wiring
- Designed to work together with CertaDrive drivers
- Three year system warranty

August 2019



Ordering data

Commercial product name	EOC	12NC	Box quantity
CertaFlux LED Strip 1ft 1100lm 830 HV4	8718699 666545 00	9290 016 84806	168
CertaFlux LED Strip 1ft 1100lm 840 HV4	8718699 666569 00	9290 016 84906	168
CertaFlux LED Strip 1ft 1100lm 865 HV4	8718699 694807 00	9290 021 09206	168

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
CertaFlux LED Strip 1ft 1100lm HV4	328	580	580	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T _c (case temperature at T _c point)	55	85	85	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified

*** Maximum value for safe operation, do not operate above this value

Optical characteristics - table per color (CCT)


CertaFlux LED Strip 1ft 1100lm 830 HV4

Parameter	Min	Typ	Max	Unit
Luminous flux	967	1029	1091	lm
Module efficacy	146	155		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.432, 0.399)		-
Color consistency			3	SDCM
CRI	80			
Photometric code		830/369		



Measurement precision $\pm 5\%$ for the flux data and $\pm 6\%$ for the efficacy data. Measurement precision for color coordinates ± 0.005 . Measurement precision for CRI ± 1.5

Operation point	830	lm	lm/W
80% I-nom 262mA	Tc 25 °C	879	166
	Tc-nom 55 °C	838	161
	Tc-max 85 °C	790	155
I-nom 328mA	Tc 25 °C	1082	161
	Tc-nom 55 °C	1029	155
	Tc-max 85 °C	969	149
I-life 580mA	Tc 25 °C	1806	143
	Tc-nom 55 °C	1717	138
	Tc-max 85 °C	1611	132

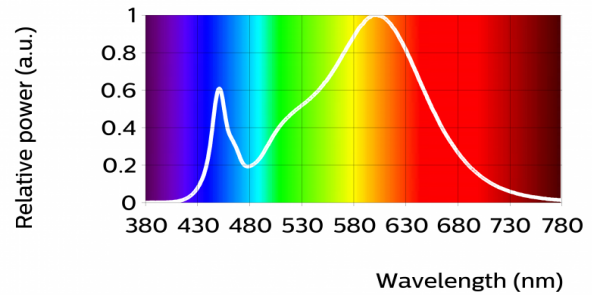


CertaFlux LED Strip 1ft 1100lm 840 HV4

Parameter	Min	Typ	Max	Unit
Luminous flux	1032	1098	1164	lm
Module efficacy	156	166		lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.377, 0.372)		-
Color consistency			3	SDCM
CRI	80			
Photometric code		840/369		



Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5

Operation point	840	lm	lm/W
80% I-nom 262mA	Tc 25 °C	939	178
	Tc-nom 55 °C	895	172
	Tc-max 85 °C	843	165
I-nom 328mA	Tc 25 °C	1155	172
	Tc-nom 55 °C	1098	166
	Tc-max 85 °C	1035	159
I-life 580mA	Tc 25 °C	1929	153
	Tc-nom 55 °C	1833	148
	Tc-max 85 °C	1721	141

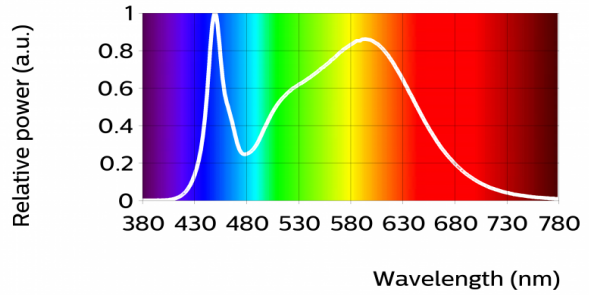


CertaFlux LED Strip 1ft 1100lm 865 HV4

Parameter	Min	Typ	Max	Unit
Luminous flux	1015	1080	1145	lm
Module efficacy	147	163		lm/W
Correlated color temperature (CCT)		6500		K
Color coordinates (CIEx, CIEy)		(0.310, 0.325)		-
Color consistency			3	SDCM
CRI	80			
Photometric code		865/369		




Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5

Operation point	865	lm	lm/W
80% I-nom 262mA	Tc 25 °C	922	174
	Tc-nom 55 °C	879	169
	Tc-max 85 °C	828	162
I-nom 328mA	Tc 25 °C	1134	169
	Tc-nom 55 °C	1080	163
	Tc-max 85 °C	1017	156
I-life 580mA	Tc 25 °C	1895	150
	Tc-nom 55 °C	1801	145
	Tc-max 85 °C	1690	138

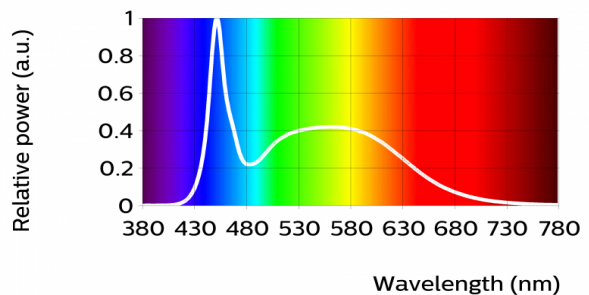

Beam shape

The Philips LED module generates a Lambertian beam shape, which is a pragmatic starting point for OEMs wishing to design secondary optics.

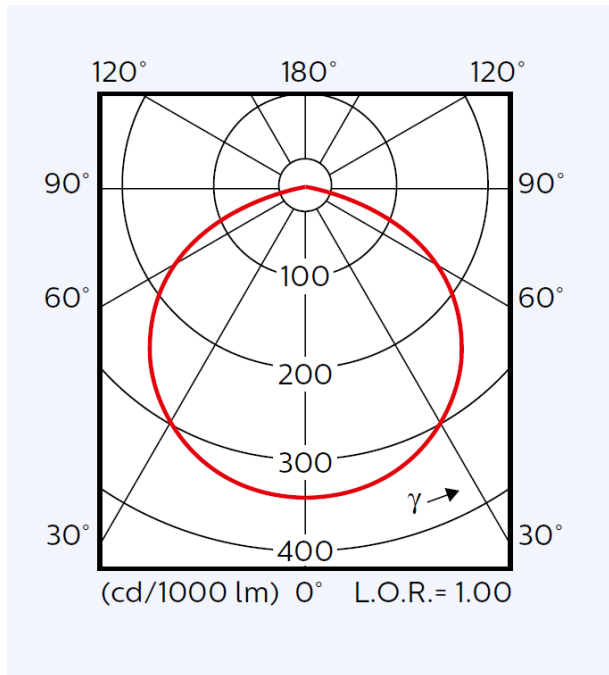

Electrical characteristics

Parameter	Min	Typ	Max	Unit
Forward voltage	19.6	20.2	20.8	V
Power consumption	6.4	6.6	6.8	W = kWh/1000h
Number of modules in series per chain			13	

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%


Specifications stated at Tc-nom and I-nom

Parallel connection allowed. Check www.easydesignintool.com.

Tuning information


Flux and efficacy versus current (at Tc nominal)

I [mA]	Flux [%]	Efficacy [%]
580	167	89
454	134	94
328	100	100
262	81	104
164	52	109

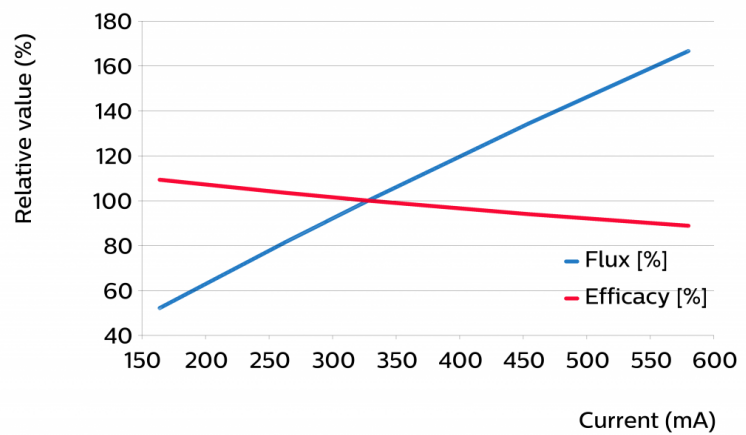

Flux and efficacy versus temperature at Tc (at I nominal)

Tc [°C]	Flux [%]	Efficacy [%]
85	94	96
55	100	100
25	105	103
0	109	105

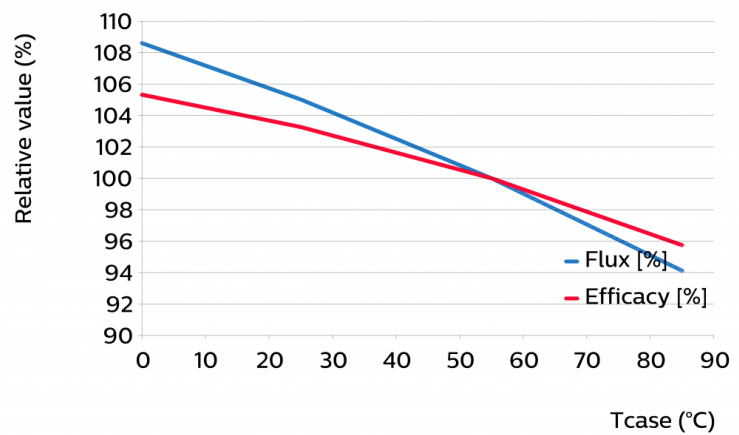

Lumen maintenance


Operation point	Lumen maintenance x 1000 hours	L70			L80			L90		
		B50	B20	B10	B50	B20	B10	B50	B20	B10
80% I -nom 262 mA	Tc 25°C	>100	>100	>100	>100	>100	>100	65	63	62
	Tc-nom 45°C	>100	>100	>100	>100	>100	>100	52	50	49
	Tc-life 85°C	>100	>100	>100	73	71	69	34	33	32
I-nom 328 mA	Tc 25°C	>100	>100	>100	>100	>100	>100	62	60	59
	Tc-nom 45°C	>100	>100	>100	94	91	89	44	43	42
	Tc-life 85°C	>100	>100	>100	70	68	66	33	32	31
I-life 580 mA	Tc 25°C	>100	>100	>100	>100	>100	>100	55	53	52
	Tc-nom 45°C	>100	>100	>100	94	90	88	44	42	41
	Tc-life 85°C	100	96	95	62	60	59	29	28	28

Lifetime

Parameter	Value	Unit
M70F50 nominal	87000	hours
M70F50 life	60000	hours

Switching cycles in accordance to EU 1194/2012: >15000.

Performance Window

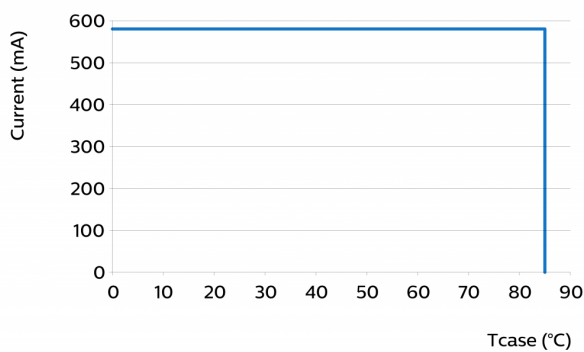


Wiring

Specification item	Value	Unit	Condition
Input wire cross-section	0.33...0.5	mm ²	solid wire
	20...22	AWG	solid wire
Input wire strip length	6.1...7.1	mm	
Input wire cross-section	0.33...0.75	mm ²	stranded (tin-dipped) wire
	18...22	AWG	stranded (tin-dipped) wire
Input wire strip length	6.1...7.1	mm	



Mechanical characteristics

Parameter	Min	Typ	Max	Unit
Length	278.9	279.2	279.5	mm
Width	19.8	20	20.6	mm
Height PCB		1		mm
Height with connector		5.25	5.7	mm
Product mass		13		gram

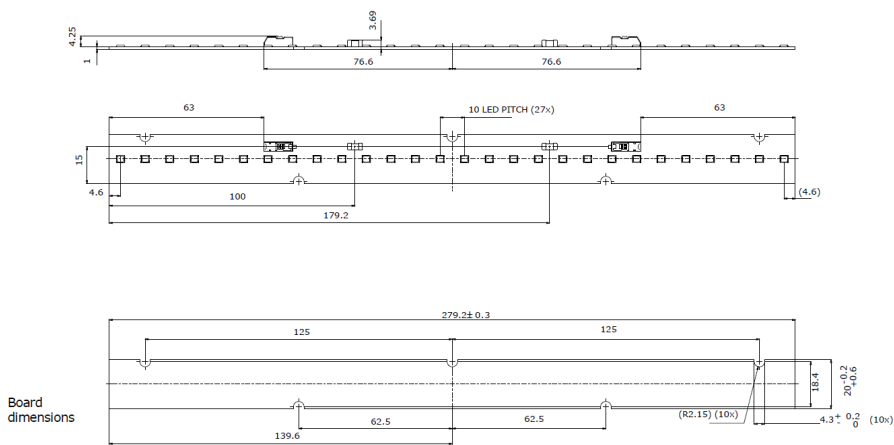

Absolute ratings

Parameter	Min	Max	Unit
Current through the LED module (I-max)		580	mA
Case temperature (Tc-max)		85	°C
Power at rated Vf-max and I-max		13.6	W
ESD (direct contact)		1	kV
Working voltage		350	V _{dc}
Ambient temperature	-40		°C

Application information

Certificates and Standards

IEC 62031:2008/A1:2012/A2:2014

CE

EN 62031:2008/A1:2013/A2:2015

ENEC

IEC 62031:2008/A1:2012/A2:2014

Relevant clauses of IEC 62471:2006 (Incl. IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)

Relevant clauses of EN 62471:2008 (With IEC/TR 62471-2: 2009 and IEC/TR 62778: 2014)

ENEC

ENEC+

CE

Environmental

RoHS/REACH

Application

IP rating

No IP-rating

Overheating protection

No protection

Dimming

Yes



© 2019 Signify Holding, IBRS 10461, 5600VB, NL. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

www.philips.com/oem

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

21/08/2019