



CorePro LED tube Universal T8



CorePro LEDtube UN 1200mm HO 18W865 T8

The new Philips CorePro LEDtube Universal T8 brings simplicity to your lighting project. You don't need to pay attention to the driver technology anymore. Thanks to a unique design, Philips CorePro LEDtube Universal T8 directly fits in luminaires operating either on Electro Magnetic ballasts or HF Electronic ballasts or mains power connection. So simple to operate and no need to carry double stock of products! Perfectly safe, reliable & easy to install Philips CorePro LEDtube Universal T8 is the ideal alternative to standard fluorescent tubes to save energy and lower investment.

Product data

General information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	30000 h
Switching Cycle	50000X
Flux measurement reference	Sphere

Light technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	2000 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	111.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80

LLMF At End Of Nominal Lifetime (Nom) 70 %	
--------------------------------------------	--

Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	18 W
Lamp Current (Nom)	100 mA
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	220-240 V


Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C

CorePro LED tube Universal T8

T-Case Maximum (Nom)	55 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1200 mm
Bulb Shape	Tube, double-ended
Approval and application	
Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate

Energy Consumption kWh/1000 h	18 kWh
EPREL Registration Number	403582
Product data	
Full product code	871869680170300
Order product name	CorePro LEDtube UN 1200mm HO 18W865 T8
EAN/UPC - Product	8718696801703
Order code	929001869402
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001869402
Net Weight (Piece)	0.215 kg



Dimensional drawing

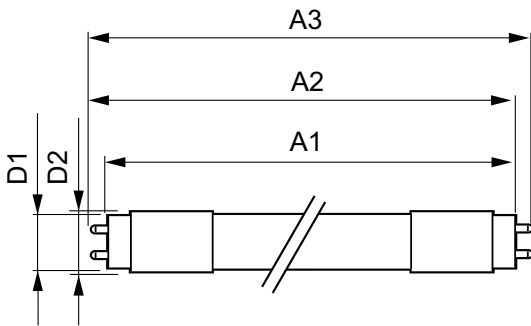

CorePro LEDtube UN 1200mm HO 18W865 T8

Product	D1	D2	A1	A2	A3
CorePro LEDtube UN 1200mm HO 18W865 T8	27.9 mm	28 mm	1199.4 mm	1205.3 mm	1213.6 mm

Photometric data

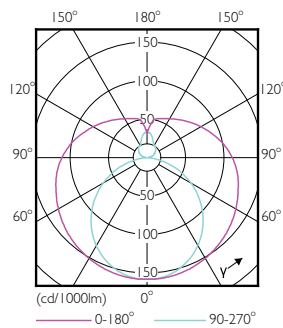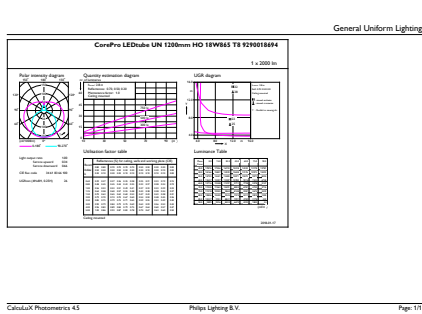


18W G13 865 6500K

18W G13 830 3000K


CorePro LED tube Universal T8

Photometric data

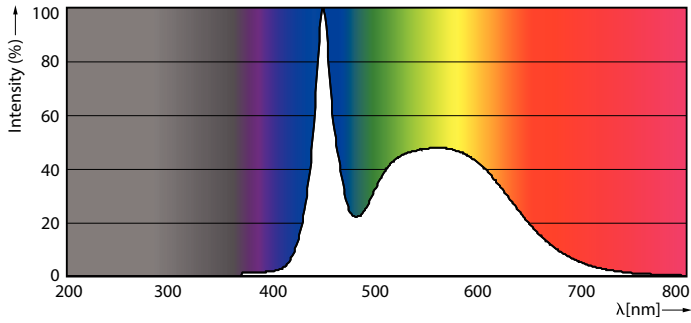


18W G13


Lifetime

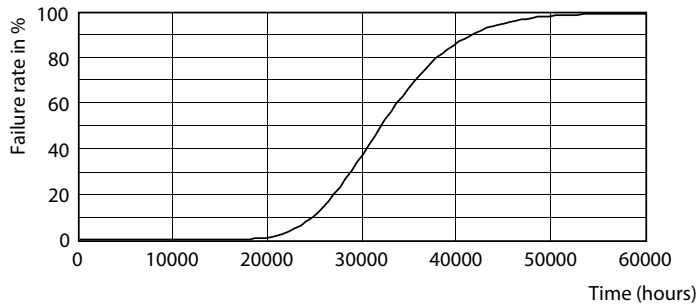


18W G13

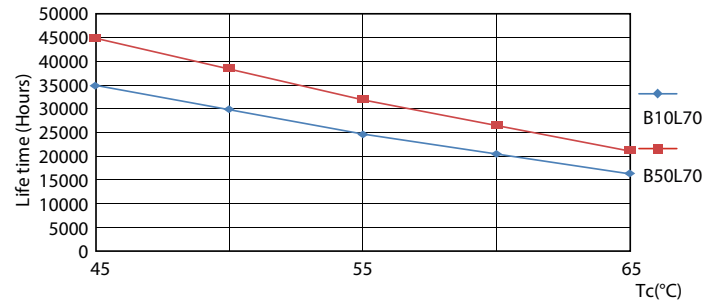

LEDtube COR SLR 18W 30K LifetimeVsTc-LED-LED

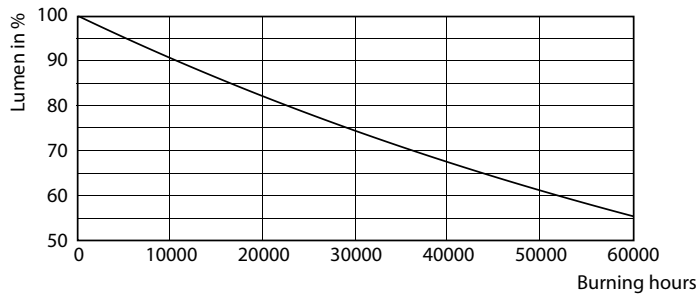


18W G13

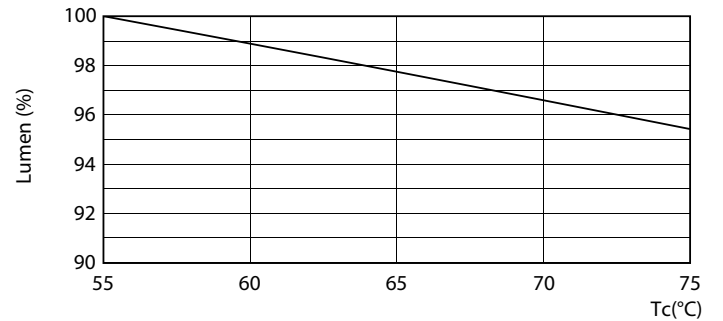

LEDtube COR SLR 18W 30K LumenVsTc-LMP-LMP

CorePro LED tube Universal T8

Lifetime

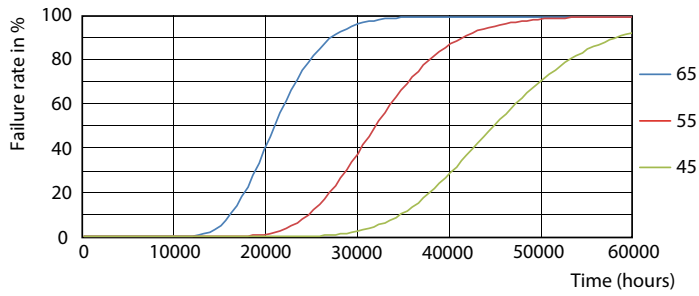

LEDtube COR SLR 18W 30K FailureRate-LED-LED

