



CorePro LED PLC 2P

LED PLC 7.5W 830 2P G24d

CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplampping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data


General information		Starting Time (Nom)		0.5 s
Cap-Base	G24D [G24d]	Warm Up Time to 60% Light (Nom)	0.5 s	
EU RoHS compliant	Yes	Power Factor (Nom)	0.5	
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)	220-240 V	
Switching Cycle	50000X	Temperature		
Light technical		T-Ambient (Max)	45 °C	
Color Code	830 [CCT of 3000K]	T-Ambient (Min)	-20 °C	
Beam Angle (Nom)	240 °	T-Storage (Max)	65 °C	
Luminous Flux (Nom)	750 lm	T-Storage (Min)	-40 °C	
Color Designation	White (WH)	T-Case Maximum (Nom)	64 °C	
Correlated Color Temperature (Nom)	3000 K	Controls and dimming		
Luminous Efficacy (rated) (Nom)	100.00 lm/W	Dimmable	No	
Color Consistency	<6	Mechanical and housing		
Color Rendering Index (Nom)	80	Product Length	100 mm	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Shape	PL-C	
Operating and electrical		Approval and application		
Input Frequency	50 to 60 Hz	Energy Saving Product	Yes	
Power (Nom)	7.5 W	Approval Marks	RoHS compliance CE marking KEMA Keur certificate	
Lamp Current (Max)	57 mA			
Lamp Current (Min)	57 mA			
Lamp Current (Nom)	57 mA			

CorePro LED PLC 2P

Energy Consumption kWh/1000 h	- kWh
Product data	
Full product code	694793915848500
Order product name	LED PLC 7.5W 830 2P G24d
EAN/UPC - Product	6947939158485
Order code	929001878910

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001878910
Net Weight (Piece)	0.034 kg


Dimensional drawing

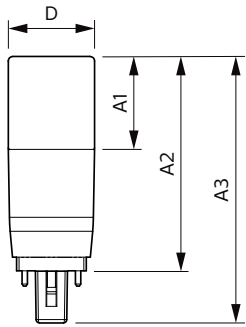


LED PLC 7.5W 830 2P G24d

Product	D	A1	A2	A3
LED PLC 7.5W 830 2P G24d	37.2 mm	40 mm	92.5 mm	115 mm


Photometric data

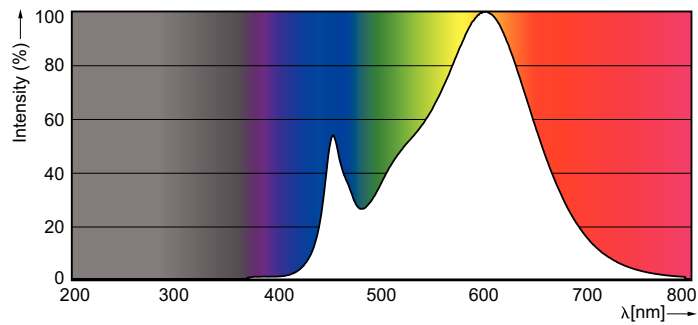

TLED 230V 10.5W-36W 1000lm /830 160D T8ND



LEDtube PLC 7.5W G24D 830 2P 24D ND





Page 11

LEDtube PLC 7.5W G24D 830 2P 24D ND



CorePro LED PLC 2P

Lifetime

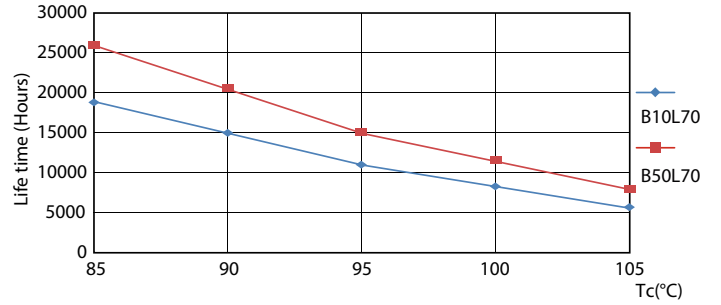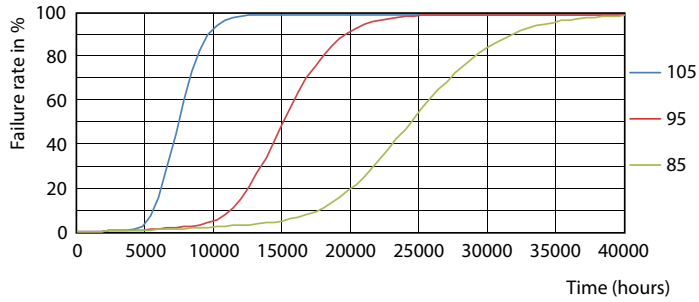


LEDtube PLC 7.5W G24D 830 2P 24D ND

LEDtube PLC 7.5W G24D 830 2P 24D ND

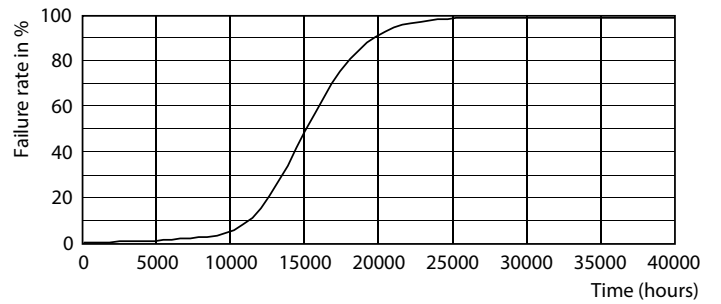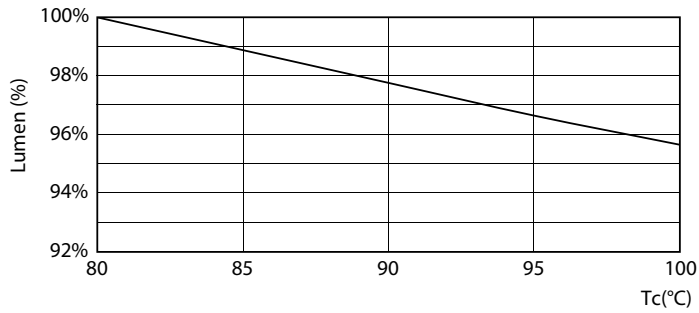

LEDtube PLC 7.5W G24D 830 2P 24D ND

LEDtube PLC 7.5W G24D 830 2P 24D ND

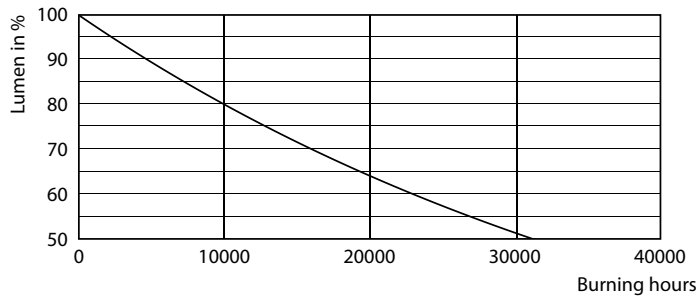

LEDtube PLC 7.5W G24D 830 2P 24D ND

CorePro LED PLC 2P

