



CorePro LED PLC 2P

LED PLC 7.5W 865 2P G24d

CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplampping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

Product data


General information		Starting Time (Nom)		0.5 s
Cap-Base	G24D [G24d]	Warm Up Time to 60% Light (Nom)	0.5 s	
EU RoHS compliant	Yes	Power Factor (Nom)	0.5	
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)	220-240 V	
Switching Cycle	50000X	Temperature		
Light technical		T-Ambient (Max)	45 °C	
Color Code	865 [CCT of 6500K]	T-Ambient (Min)	-20 °C	
Beam Angle (Nom)	240 °	T-Storage (Max)	65 °C	
Luminous Flux (Nom)	806 lm	T-Storage (Min)	-40 °C	
Color Designation	Cool Daylight	T-Case Maximum (Nom)	64 °C	
Correlated Color Temperature (Nom)	6500 K	Controls and dimming		
Luminous Efficacy (rated) (Nom)	107.00 lm/W	Dimmable	No	
Color Consistency	<6	Mechanical and housing		
Color Rendering Index (Nom)	80	Product Length	100 mm	
LLMF At End Of Nominal Lifetime (Nom)	70 %	Bulb Shape	PL-C	
Operating and electrical		Approval and application		
Input Frequency	50 to 60 Hz	Energy Saving Product	Yes	
Power (Nom)	7.5 W	Approval Marks	RoHS compliance CE marking KEMA Keur certificate	
Lamp Current (Max)	57 mA			
Lamp Current (Min)	57 mA			
Lamp Current (Nom)	57 mA			

CorePro LED PLC 2P

Energy Consumption kWh/1000 h	- kWh
Product data	
Full product code	694793915852200
Order product name	LED PLC 7.5W 865 2P G24d
EAN/UPC - Product	6947939158522
Order code	929001879110

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001879110
Net Weight (Piece)	0.034 kg


Dimensional drawing

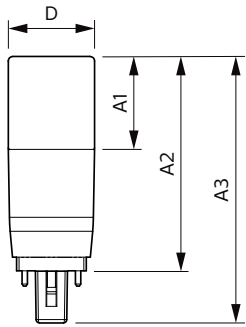


LED PLC 7.5W 865 2P G24d

Product	D	A1	A2	A3
LED PLC 7.5W 865 2P G24d	37.2 mm	40 mm	92.5 mm	115 mm


Photometric data

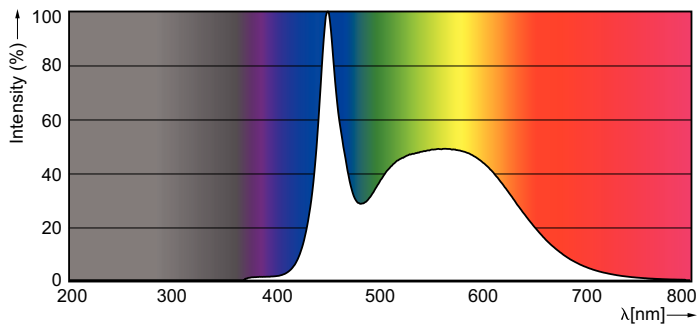

CorePro LEDtube 1500mm 20W G13 865





LEDtube PLC 7.5W G24D 830 2P 24D ND



LEDtube PLC 7.5W G24D 865 2P 24D ND



CorePro LED PLC 2P

Lifetime

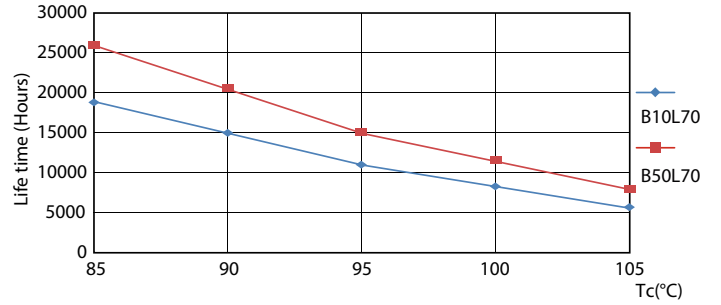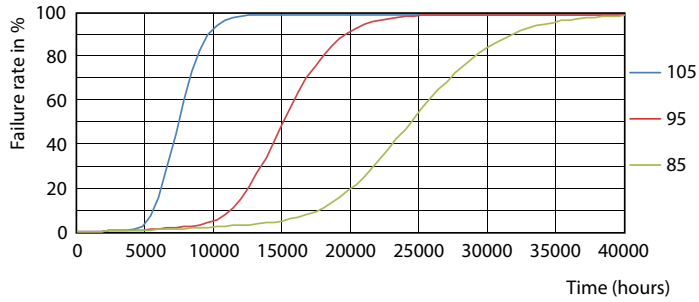


LEDtube PLC 7.5W G24D 830 2P 24D ND

LEDtube PLC 7.5W G24D 830 2P 24D ND

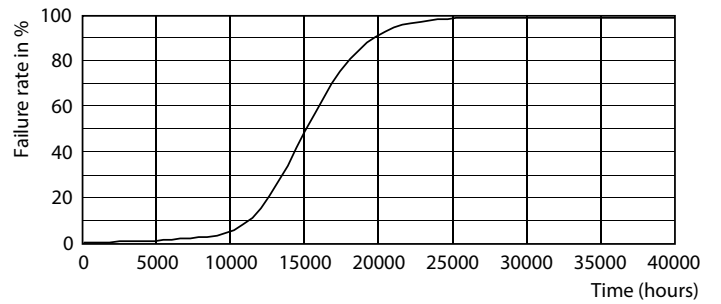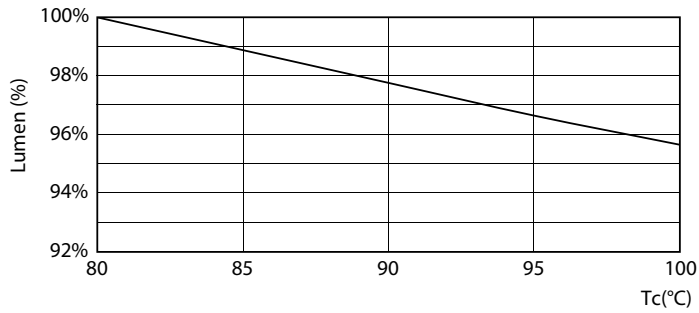

LEDtube PLC 7.5W G24D 830 2P 24D ND

LEDtube PLC 7.5W G24D 830 2P 24D ND

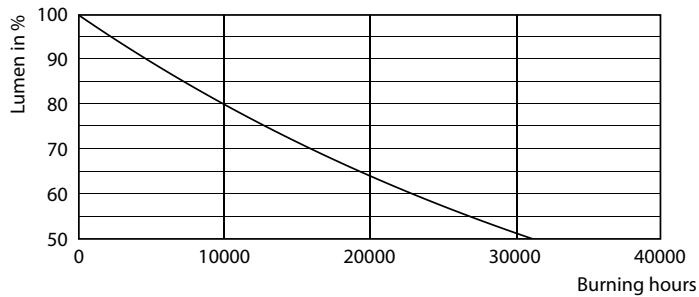

LEDtube PLC 7.5W G24D 830 2P 24D ND

CorePro LED PLC 2P

