



MASTER LEDtube EM/ Mains T8

MASTER LEDtube 1500mm UO 24W 830 T8 FF RCA

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

Warnings and Safety

- NOTE: The overall energy efficiency and light distribution of any installation that uses these lamps will be determined by the design of the installation.

Product data


General information		Color Rendering Index (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		83
EU RoHS compliant	Yes	LLMF At End Of Nominal Lifetime (Nom) 70 %	
Nominal Lifetime (Nom)	50000 h	Operating and electrical	
Switching Cycle	200000X	Input Frequency	50 to 60 Hz
Light technical		Power (Nom)	24 W
Color Code	830 [CCT of 3000K]	Lamp Current (Max)	112 mA
Beam Angle (Nom)	160 °	Lamp Current (Min)	103 mA
Luminous Flux (Nom)	3400 lm	Starting Time (Nom)	0.5 s
Color Designation	White (WH)	Warm Up Time to 60% Light (Nom)	0.5 s
Correlated Color Temperature (Nom)	3000 K	Power Factor (Nom)	0.9
Luminous Efficacy (rated) (Nom)	141.00 lm/W	Voltage (Nom)	220-240 V
Color Consistency	<6		

MASTER LEDtube EM/Mains T8

Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	60 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Product Length	1500 mm
Bulb Shape	Tube, double-ended
Approval and application	
Energy Saving Product	Yes

Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	24 kWh
Product data	
Full product code	871869681805300
Order product name	MASTER LEDtube 1500mm UO 24W 830 T8 FF RCA
EAN/UPC - Product	8718696818053
Order code	929001908208
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001908208
Net Weight (Piece)	0.315 kg


Dimensional drawing

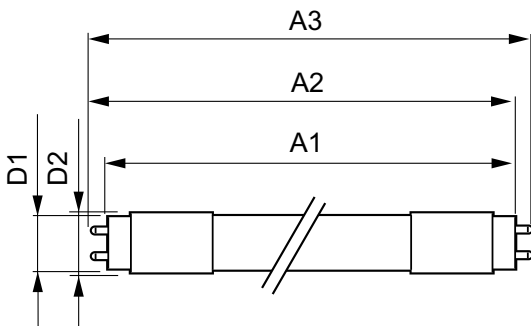


MASTER LEDtube 1500mm UO 24W 830 T8 FF RCA

Product	D1	D2	A1	A2	A3
MASTER LEDtube 1500mm UO 24W 830 T8 FF RCA	25.8 mm	28 mm	1498.7 mm	1505.8 mm	1498.7 mm

Photometric data

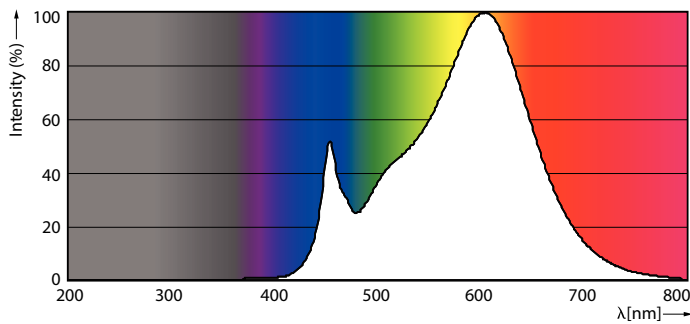


LEDtube G13 24W 3000K 160D

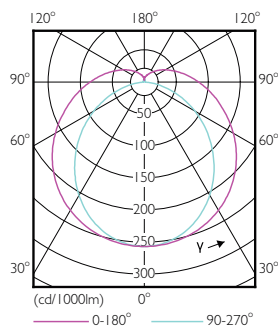

LEDtube G13 16W 3000K 160D

MASTER LEDtube EM/Mains T8



Photometric data



General Parameters 41 Photo Lighting 8.1 Page 17

LEDtube G13 24W 3000K 160D


Lifetime

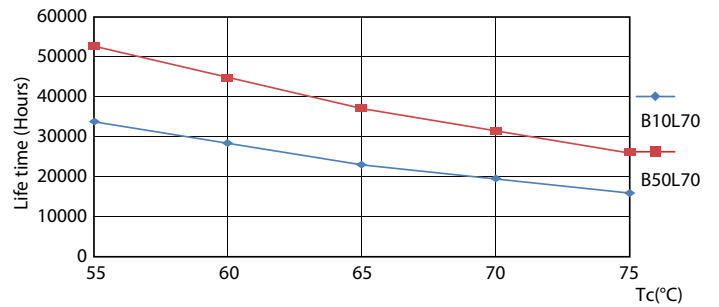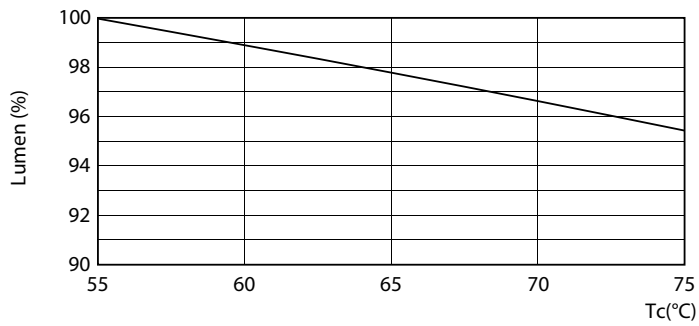

LEDtube G13 24W 3000K 160D LumenVsTc



LEDtube G13 16W 3000K 160D LifetimeVsTc

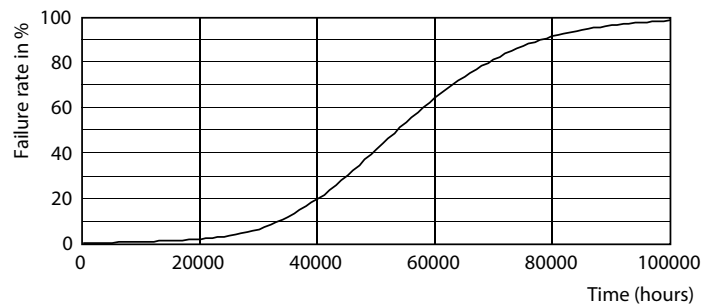


LEDtube G13 16W 3000K 160D

LEDtube G13 16W 3000K 160D

MASTER LEDtube EM/Mains T8

Lifetime

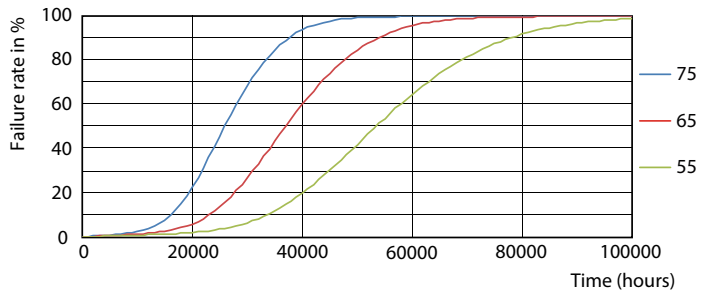

LEDtube G13 16W 3000K 160D FailureRate

