



TrueForce High Lumen PAR

25.5PAR30L/PER/930/S15/ND/120-277V 6/1FB

Philips LED TrueForce PAR high lumen lamps are the perfect transition from CDM lamps to LED.

Product data

| General information | |
|------------------------|------------------------------------|
| Cap-Base | E26 [Single Contact Medium Screw] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 50000X |
| Technical Type | 25.5-75W |

| Light technical | |
|---------------------------------------|---------------------|
| Color Code | 930 [CCT of 3000K] |
| Beam Angle (Nom) | 15 ° |
| Luminous Flux (Nom) | 2150 lm |
| Luminous Intensity (Nom) | 13500 cd |
| Color Designation | White (WH) |
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 84.00 lm/W |
| Color Consistency | <4 |
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |

| Operating and electrical | |
|--------------------------|-------------|
| Input Frequency | 50 to 60 Hz |
| Power (Nom) | 25.5 W |

| | |
|---------------------------------|-----------|
| Wattage Equivalent | 75 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time to 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.8 |
| Voltage (Nom) | 120-277 V |

| Temperature | |
|----------------------|-------|
| T-Case Maximum (Nom) | 95 °C |

| Controls and dimming | |
|----------------------|----|
| Dimmable | No |

| Mechanical and housing | |
|------------------------|-----------------------------------|
| Bulb Shape | PAR30L [PAR 3.75 inch/95mm Long] |

| Approval and application | |
|-------------------------------|-------|
| Suitable For Accent Lighting | Yes |
| Energy Consumption kWh/1000 h | - kWh |


| Product data | |
|--------------------|--|
| Order product name | 25.5PAR30L/PER/930/S15/ND/120-277V 6/1FB |

TrueForce High Lumen PAR

| | |
|---------------------------------|--------------|
| EAN/UPC - Product | 046677534660 |
| Order code | 929001917204 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 6 |

| | |
|---------------------|--------------|
| Material Nr. (12NC) | 929001917204 |
| Net Weight (Piece) | 0.285 kg |


Dimensional drawing

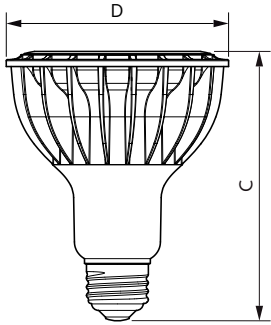


25.5PAR30L/PER/930/S15/ND/120-277V 6/1FB

| Product | D | C |
|--|-------|--------|
| 25.5PAR30L/PER/930/S15/ND/120-277V 6/1FB | 96 mm | 119 mm |


Photometric data



LEDspot 25,5 PAR30L 930 S15

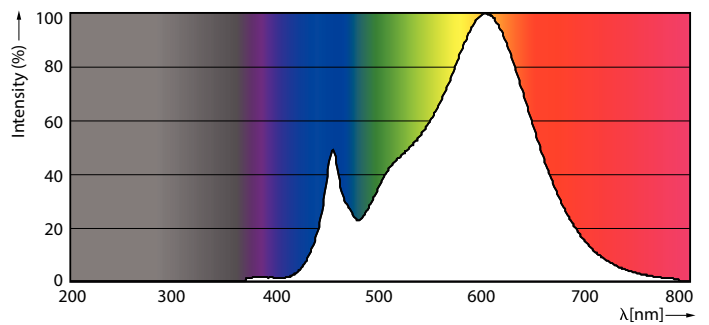

LEDspot PAR30 1FB





© 2022 Philips Lighting B.V. Page 11

LEDspot 25,5 PAR30L 930 S15

TrueForce High Lumen PAR

Lifetime

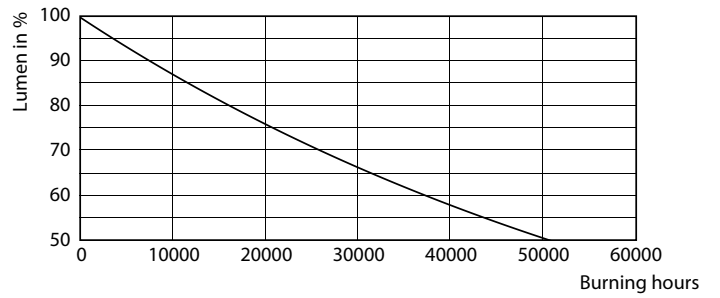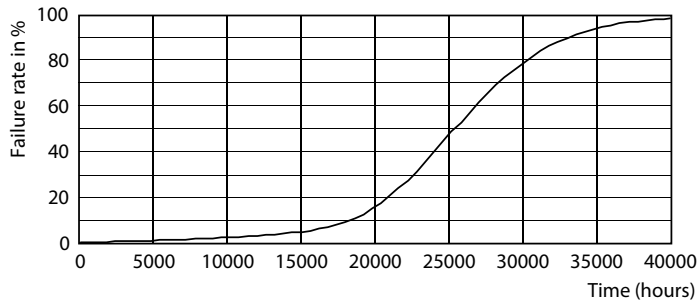

LEDspot PAR30 1FB

LEDspot PAR30 1FB

