



TrueForce High Lumen PAR

25.5PAR30L/PER/930/F25/ND/120-277V 6/1FB

Philips LED TrueForce PAR high lumen lamps are the perfect transition from CDM lamps to LED.

Product data

General information		Wattage Equivalent	
Cap-Base	E26 [Single Contact Medium Screw]		75 W
EU RoHS compliant	Yes	Starting Time (Nom)	0.5 s
Nominal Lifetime (Nom)	25000 h	Warm Up Time to 60% Light (Nom)	0.5 s
Switching Cycle	50000X	Power Factor (Nom)	0.8
Technical Type	25.5-75W	Voltage (Nom)	120-277 V
Light technical		Temperature	
Color Code	930 [CCT of 3000K]	T-Case Maximum (Nom)	95 °C
Beam Angle (Nom)	25 °	Controls and dimming	
Luminous Flux (Nom)	2150 lm	Dimmable	No
Luminous Intensity (Nom)	10000 cd	Mechanical and housing	
Color Designation	White (WH)	Bulb Finish	Clear
Correlated Color Temperature (Nom)	3000 K	Bulb Material	Aluminum
Luminous Efficacy (rated) (Nom)	84.00 lm/W	Bulb Shape	PAR30L [PAR 3.75 inch/95mm Long]
Color Consistency	<4	Approval and application	
Color Rendering Index (Nom)	90	Suitable For Accent Lighting	Yes
LLMF At End Of Nominal Lifetime (Nom)	70 %	Energy Consumption kWh/1000 h	- kWh
Operating and electrical		Energy Certifications	Energy Star
Input Frequency	50 to 60 Hz		
Power (Nom)	25.5 W		


TrueForce High Lumen PAR

Product data

Order product name	25.5PAR30L/PER/930/F25/ND/120-277V 6/1FB
EAN/UPC - Product	046677534677
Order code	929001917304
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	6
Material Nr. (12NC)	929001917304
Net Weight (Piece)	0.285 kg


Dimensional drawing




25.5PAR30L/PER/930/F25/ND/120-277V 6/1FB

Product	D	C
25.5PAR30L/PER/930/F25/ND/120-277V 6/1FB	96 mm	119 mm


Photometric data



LEDspot 25,5 PAR30L 930 F25

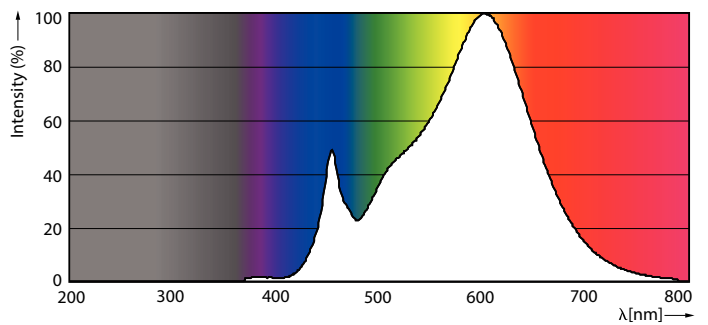

LEDspot PAR30 1FB





Accum Lighting - Spot
1 - DIMENSIONI PARAL 300K
1 - DIMENSIONI PARAL 300K

LEDspot 25,5 PAR30L 930 F25

TrueForce High Lumen PAR

Lifetime

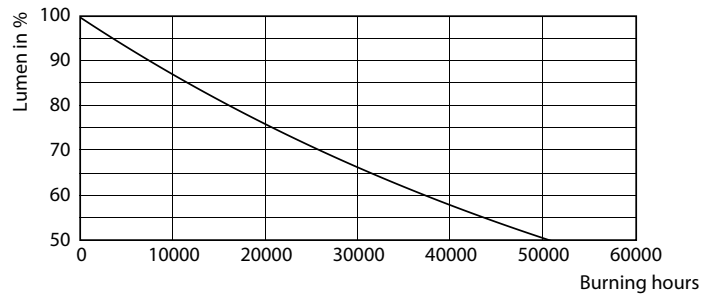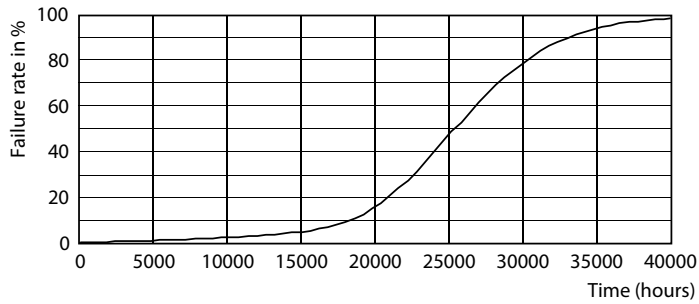

LEDspot PAR30 1FB

LEDspot PAR30 1FB

