



# LED PAR30 S/L

## 9.4PAR30S/COR/930/F25/DIM/120V T20 6/1FB

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

### Product data


General information		Starting Time (Nom)	
Cap-Base	E26 [ Single Contact Medium Screw]		0.5 s
EU RoHS compliant	Yes	Warm Up Time to 60% Light (Nom)	0.5 s
Nominal Lifetime (Nom)	25000 h	Power Factor (Nom)	0.9
Switching Cycle	50000X	Voltage (Nom)	120 V
Technical Type	9.4-75W		
Light technical		Temperature	
Color Code	930 [ CCT of 3000K]	T-Case Maximum (Nom)	80 °C
Beam Angle (Nom)	25 °		
Luminous Flux (Nom)	850 lm	Controls and dimming	
Luminous Intensity (Nom)	2910 cd	Dimmable	Yes
Color Designation	White (WH)		
Correlated Color Temperature (Nom)	3000 K	Mechanical and housing	
Luminous Efficacy (rated) (Nom)	90.00 lm/W	Bulb Finish	Clear
Color Consistency	<4	Bulb Material	Plastic
Color Rendering Index (Nom)	90	Bulb Shape	PAR30S [ PAR 3.75 inch/95mm Short]
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and electrical		Approval and application	
Input Frequency	50 to 60 Hz	Suitable For Accent Lighting	Yes
Power (Nom)	9.4 W	Energy Consumption kWh/1000 h	- kWh
Lamp Current (Nom)	90 mA	Energy Certifications	Energy Star
Wattage Equivalent	75 W		
Product data		Order product name	9.4PAR30S/COR/930/F25/DIM/120V T20 6/1FB

# LED PAR30 S/L

EAN/UPC - Product	046677546984
Order code	929002045604
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6

Material Nr. (12NC)	929002045604
Net Weight (Piece)	0.134 kg


## Dimensional drawing




9.4PAR30S/COR/930/F25/DIM/120V T20 6/1FB

Product	D	C
9.4PAR30S/COR/930/F25/DIM/120V T20 6/1FB	97 mm	94 mm


## Photometric data

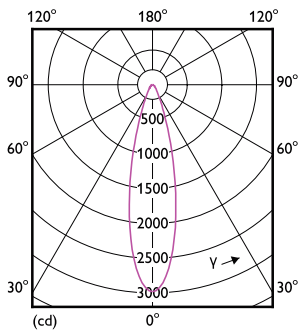

LEDspots 9,4W PAR30S E26 930 25D

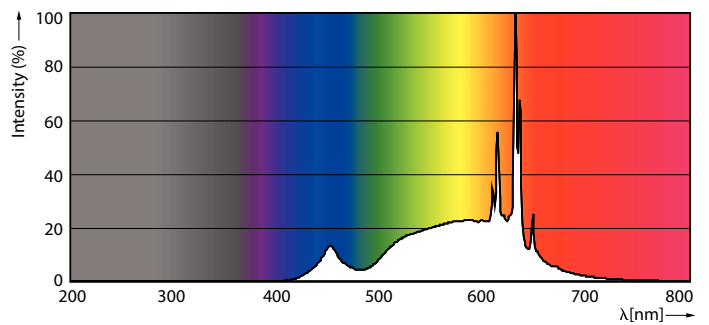

LEDspots 9,4W PAR30S E26 930 25D



© 2022 Philips Lighting B.V. All rights reserved. Page 11

LEDspots 9,4W PAR30S E26 930 25D

# LED PAR30 S/L

## Lifetime



Life Expectancy Diagram

Lumen Maintenance Diagram

