



MASTER VALUE LEDspot MV

MASLEDspot VLE D 6.2-80W GU10 930 36D UK

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED

Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	575 lumen
Luminous Intensity (Nom)	850 cd

Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	92.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	575 lumen

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz

MASTER VALUE LEDspot MV

Power Consumption	6.2 W
Lamp Current (Nom)	33 mA
Wattage Equivalent	80 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.88
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Mechanical and Housing

Bulb Shape	PAR16 [PAR 2 inch/50mm]
------------	-------------------------

Approval and Application


Energy Efficiency Class	F
-------------------------	---

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	391912
EU RoHS compliant	Yes

Product Data



Full product code	871869970525101
Order product name	MASLEDspot VLE D 6.2-80W GU10 930 36D UK
Order code	929002068499
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929002068499
Full product name	MASLEDspot VLE D 6.2-80W GU10 930 36D UK
EAN/UPC - Case	8719514405615

Dimensional drawing



Product	D	C
MASLEDspot VLE D 6.2-80W GU10 930 36D UK	50 mm	54 mm

Photometric data

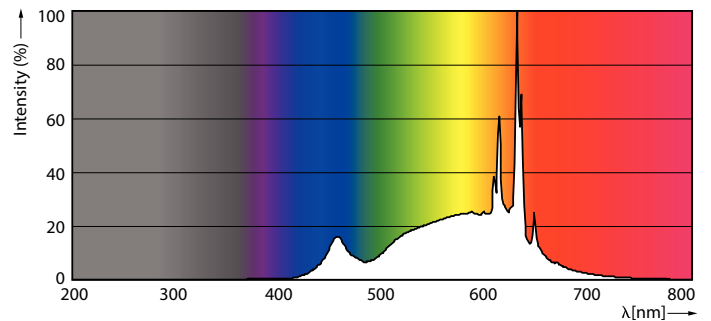


Accent Lighting Spots - MASLEDspot VLE D 6.2-80W GU10 930 36D UK

Spectral Power Distribution Colour - MASLEDspot VLE D 6.2-80W GU10 930 36D UK


MASTER VALUE LEDspot MV

Photometric data




Light Distribution Diagram - MASLEDspot VLE D 6.2-80W GU10 930 36D UK

Lifetime

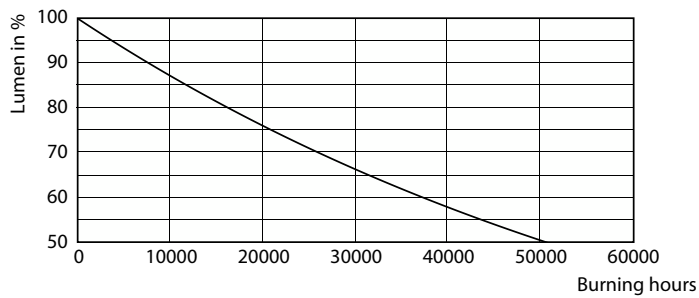

Lumen Maintenance Diagram - MASLEDspot VLE D 6.2-80W GU10 930 36D UK

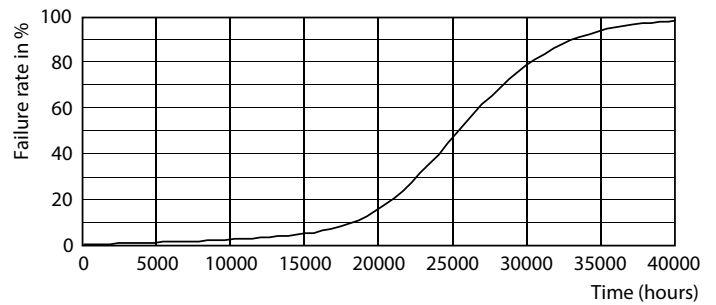

Life Expectancy Diagram - MASLEDspot VLE D 6.2-80W GU10 930 36D UK

