

PHILIPS

CertaFlux

LED

CertaFlux LED Strip
12mm 2ft 8xx HV4



Datasheet

The CertaFlux LED Strip 12 is a uniquely narrow LED module of only 12mm wide. It is available in 1ft, 2ft, 4ft and 5ft versions. This makes the product very suitable for applications like waterproof, battens and trunking.

Key features and benefits

- Long life-time: >50,000 hours
- LED module efficiency of 160 lm/W
- Economical choice for waterproof, battens and trunking luminaires
- Good color rendering, CRI: >80
- Color consistency of 3 SDCM
- 1ft, 2ft, 4ft and 5ft available
- 1100 lm/ft
- PCB width only 12mm
- Three year system warranty

August 2020



Ordering data

Commercial product name	12NC	Box quantity
CertaFlux LED Strip 12 2ft 2200lm 830 HV4	9290 021 37706	144
CertaFlux LED Strip 12 2ft 2200lm 840 HV4	9290 021 37806	144
CertaFlux LED Strip 12 2ft 2200lm 865 HV4	9290 021 37906	144

Drive currents

Parameter	Nominal*	Life**	Max***	Unit
CertaFlux LED Strip 12mm 2ft 8xx HV4	273	360	400	mA

Module temperatures

Parameter	Nominal*	Life**	Max***	Unit
T _c (case temperature at T _c point)	60	65	90	°C

* Nominal value at which typical performance is specified

** Value at which life time is specified

*** Maximum value for safe operation, do not operate above this value

Optical characteristics - table per color (CCT)

CertaFlux LED Strip 12 2ft 2200lm 830 HV4


Parameter	Min	Typ	Max	Unit
Luminous flux	1930	2053	2177	lm
Module efficacy	130	138		lm/W
Correlated color temperature (CCT)		3000		K
Color coordinates (CIEx, CIEy)		(0.431, 0.401)		-
Color consistency			3	SDCM
CRI	80			
Photometric code		830/359		
Radiation angle		120		deg
Photobiological safety			RG1 unlimited	



Measurement precision $\pm 5\%$ for the flux data and $\pm 6\%$ for the efficacy data. Measurement precision for color coordinates ± 0.005 . Measurement precision for CRI ± 1.5

Performance based on I-nom divided equally among the two channels.

Operation point	830	lm	lm/W
80% I-nom 218mA	Tc 25 °C	1776	150
	Tc-nom 60 °C	1684	145
	Tc-max 90 °C	1670	144
I-nom 273mA	Tc 25 °C	2167	143
	Tc-nom 60 °C	2053	138
	Tc-max 90 °C	2036	137
I-max 400mA	Tc 25 °C	3018	128
	Tc-nom 60 °C	2857	124
	Tc-max 90 °C	2832	123

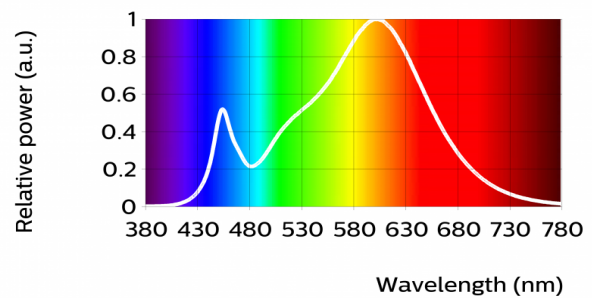


CertaFlux LED Strip 12 2ft 2200lm 840 HV4

Parameter	Min	Typ	Max	Unit
Luminous flux	2068	2200	2332	lm
Module efficacy	139	148		lm/W
Correlated color temperature (CCT)		4000		K
Color coordinates (CIEx, CIEy)		(0.379, 0.375)		-
Color consistency			3	SDCM
CRI	80			
Photometric code		840/359		
Radiation angle		120		deg
Photobiological safety			RG1 unlimited	




Measurement precision $\pm 5\%$ for the flux data and $\pm 6\%$ for the efficacy data. Measurement precision for color coordinates ± 0.005 . Measurement precision for CRI ± 1.5 .
 Performance based on I-nom divided equally among the two channels.

Operation point	840	lm	lm/W
80% I-nom 218mA	Tc 25 °C	1902	161
	Tc-nom 60 °C	1804	155
	Tc-max 90 °C	1789	155
I-nom 273mA	Tc 25 °C	2321	153
	Tc-nom 60 °C	2200	148
	Tc-max 90 °C	2182	147
I-max 400mA	Tc 25 °C	3234	138
	Tc-nom 60 °C	3061	133
	Tc-max 90 °C	3035	132

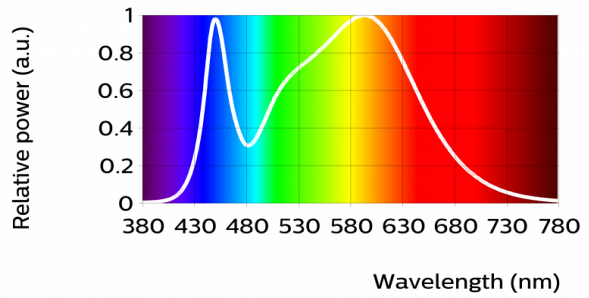


CertaFlux LED Strip 12 2ft 2200lm 865 HV4

Parameter	Min	Typ	Max	Unit
Luminous flux	2013	2142	2270	lm
Module efficacy	136	144		lm/W
Correlated color temperature (CCT)		6500		K
Color coordinates (CIEx, CIEy)		(0.309, 0.325)		-
Color consistency			3	SDCM
CRI	80			
Photometric code		865/359		
Radiation angle		120		deg
Photobiological safety			RG1 unlimited	



Measurement precision ± 5% for the flux data and ± 6% for the efficacy data. Measurement precision for color coordinates ± 0.005. Measurement precision for CRI ± 1.5
 Performance based on I-nom divided equally among the two channels.

Operation point	865	lm	lm/W
80% I-nom 218mA	Tc 25 °C	1852	156
	Tc-nom 60 °C	1756	151
	Tc-max 90 °C	1742	150
I-nom 273mA	Tc 25 °C	2260	149
	Tc-nom 60 °C	2142	144
	Tc-max 90 °C	2124	143
I-max 400mA	Tc 25 °C	3149	134
	Tc-nom 60 °C	2980	129
	Tc-max 90 °C	2954	128

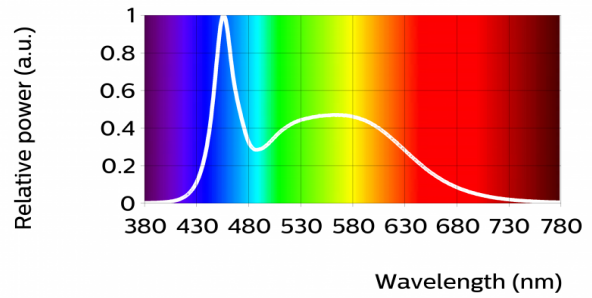

Electrical characteristics


Parameter	Min	Typ	Max	Unit
Forward voltage	53.3	54.3	55.4	V
Power consumption	14.5	14.8	15.1	W = kWh/1000h
Number of modules in series per chain			5	
Number of modules in parallel			4	

Measurement precision for Vf +/- 3%. Measurement precision for power +/- 3.3%

Tuning information


Flux and efficacy versus current (at Tc nominal)

I [mA]	Flux [%]	Efficacy [%]
360	127	93
316	114	96
273	100	100
218	82	105
136	53	115

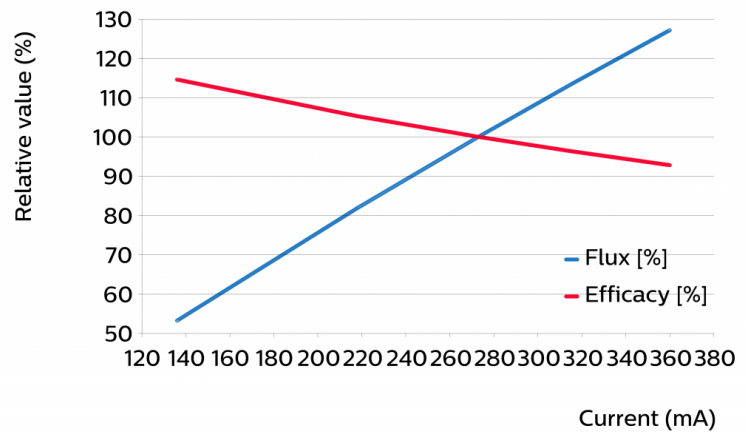

Flux and efficacy versus temperature at Tc (at I nominal)

Tc [°C]	Flux [%]	Efficacy [%]
65	99	99
60	100	100
25	106	103
0	109	106

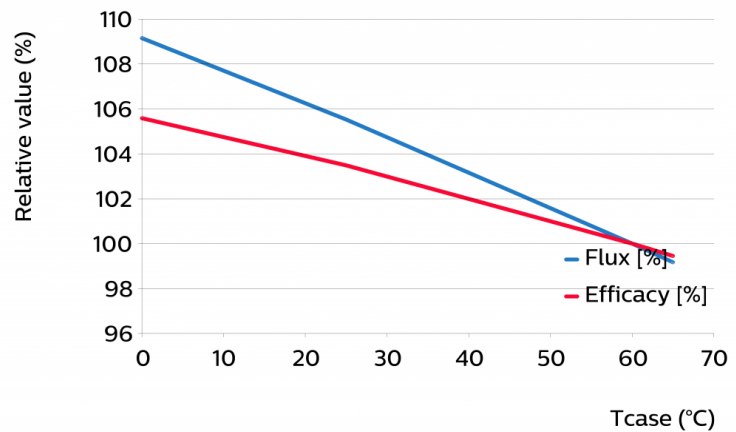

Lumen maintenance


Operation point	Lumen maintenance x 1000 hours	L70			L80			L90		
		B50	B20	B10	B50	B20	B10	B50	B20	B10
Tc 25°C	80% Inom 218 mA	>70	>70	>70	>70	>70	>70	57	54	52
	I nom 273 mA	>70	>70	>70	>70	>70	>70	38	35	34
	I life 360 mA	>70	>70	>70	>70	>70	70	36	34	33
Tc nom 60°C	80% Inom 218 mA	>70	>70	>70	>70	>70	>70	54	51	50
	I nom 273 mA	>70	>70	>70	>70	>70	>70	36	34	33
	I life 360 mA	>70	>70	>70	>70	69	67	34	32	31
Tc life 65°C	80% I nom 218 mA	>70	>70	>70	>70	>70	>70	51	48	47
	I nom 273 mA	>70	>70	>70	>70	69	67	34	32	31
	I life 360 mA	>70	>70	>70	69	65	63	32	30	29

Lifetime

Parameter	Value	Unit
M70F50 nominal	>70000	hours
M70F50 life	>70000	hours


Switching cycles in accordance to EU 1194/2012: >15000.

Performance Window

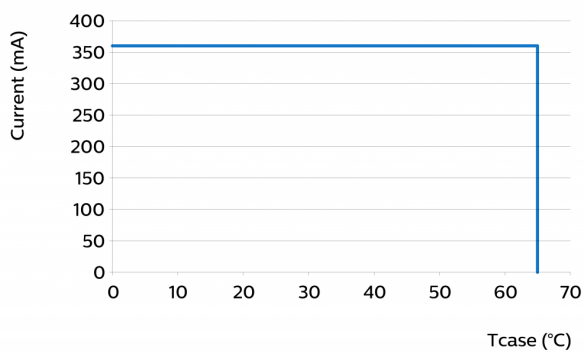

Wiring


Specification item	Value	Unit	Condition
Input wire cross-section	0.2...0.5	mm ²	solid wire
	20...24	AWG	solid wire
Input wire strip length	5.2...5.8	mm	
Input wire cross-section	0.33...0.5	mm ²	stranded wire
	20...22	AWG	stranded wire
Input wire strip length	5.2...5.8	mm	

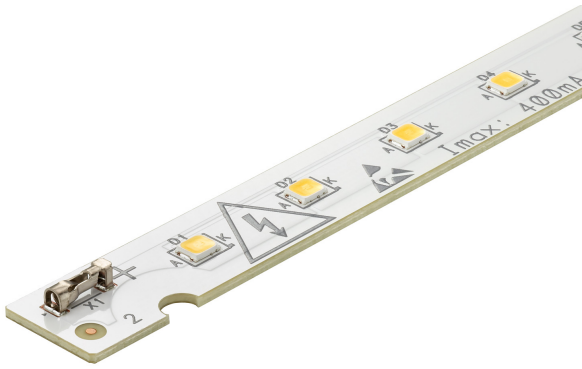

Connecting the module with wrong polarity may result in damage beyond repair.

Mechanical characteristics

Parameter	Min	Typ	Max	Unit
Length	575.7	576	576.3	mm
Width	11.8	12	12.6	mm
Height PCB		1		mm
Height total	3.25	3.45	3.65	mm
Product mass		16		gram

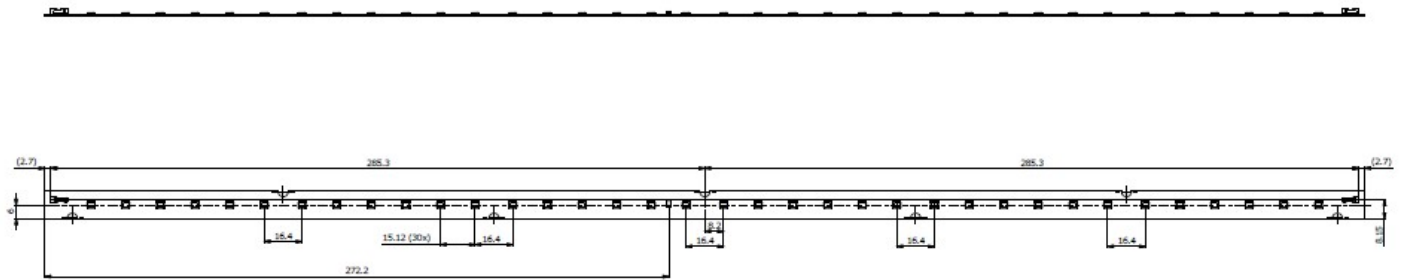

Absolute ratings

Parameter	Min	Max	Unit
Current through the LED module (I-max)		400	mA
Case temperature (Tc-max)		90	°C
ESD (direct contact)		1	kV
Working voltage		350	V _{dc}

Application information

Certificates and Standards

CE
ENEC
ENEC+

Environmental

RoHS/REACH

Application

Dimming

Yes



© 2020 Signify Holding, IBRS 10461, 5600VB, NL. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

www.philips.com/oem

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

24/08/2020