



# **LED G25**

## 2.7G25/PER/927-922/CL/G/E26/WGX1FB T20

Philips G25 LED Lamps offer energy saving ambience with an elegant effect. Their unique design provides light in all directions, giving lighting designers a long life alternative to standard incandescent sources.

#### **Product data**

General information	
Cap-Base	E26 [ Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	2.7-25W
Light technical	
Color Code	927-922 [ CCT of 2700K-2200K]
Luminous Flux (Nom)	250 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	- K
Luminous Efficacy (rated) (Nom)	92.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	2.7 W
Lamp Current (Nom)	30 mA
Wattage Equivalent	25 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s


Power Factor (Nom)	0.75
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	45 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	G25 (G25)
Approval and application	
Energy Consumption kWh/1000 h	- kWh
Energy Certifications	Energy Star
Product data	
Order product name	2.7G25/PER/927-922/CL/G/E26/WGX1FB T20
EAN/UPC - Product	046677549350
Order code	929002204704
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Datasheet, 2022, June 10 data subject to change

### **LED G25**

Material Nr. (12NC)	929002204704
Net Weight (Piece)	0.040 kg


#### Dimensional drawing




2.7G25/PER/927-922/CL/G/E26/WGX1FB T20


# Product D C 2.7G25/PER/927-922/CL/G/E26/WGX1FB T20 80 mm 121 mm

#### Photometric data

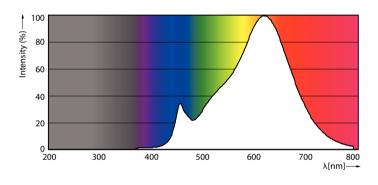



#### LEDbulb CL,FR 927





LEDbulb 927 CL

### LEDbulb 25W E26 G25 927 CL

#### **LED G25**

#### Lifetime

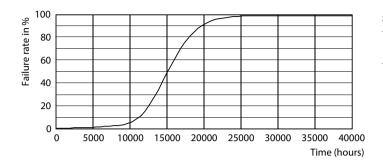

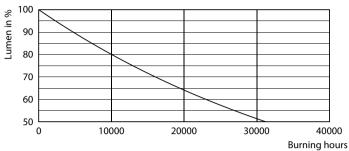

Life Expectancy Diagram

Lumen Maintenance Diagram

