

MasterConnect LEDtube EM/mains T8



MasterConnect LEDtube IA 1500mm UO 25W840 T8

Introducing MasterConnect LEDtubes – smart retrofit LED T8 lamps that give you an easy and seamless way to upgrade to connected lighting. Simply set up with an intuitive app and MasterConnect LED tube lighting can be programmed to maximize energy savings, while providing wireless and automated light for your comfort and convenience. What's more, it is fully scalable and upgradable. If you want to enjoy additional benefits such as remote control or a management dashboard, you can simply keep the lamps you currently have installed and add a gateway to experience all the advantages of a cloud-based system. There's no better way to take lighting solutions to the next level.

Product data

General information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
EU RoHS compliant	Yes			
Nominal Lifetime (Nom)	60000 h			
Switching Cycle	200000X			
Technical Type	25-58W			
Flux measurement reference	Sphere			
Light technical				
Color Code	840 [CCT of 4000K]			
Beam Angle (Nom)	160 °			
Luminous Flux (Nom)	3700 lm			
Color Designation	Cool White (CW)			
Correlated Color Temperature (Nom)	4000 K			

Luminous Efficacy (rated) (Nom)	148.00 lm/W			
Color Consistency	<6			
Color Rendering Index (Nom)	83			
LLMF At End Of Nominal Lifetime (Nom) 70 %				
Operating and electrical				
Input Frequency	50 to 60 Hz			
Power (Nom)	25 W			
Lamp Current (Max)	117 mA			
Lamp Current (Min)	108 mA			
Starting Time (Nom)	0.5 s			
Warm Up Time to 60% Light (Nom)	0.5 s			
Power Factor (Nom)	0.9			


Datasheet, 2022, June 13 data subject to change

MasterConnect LEDtube EM/mains T8

Voltage (Nom)	220-240 V			
Temperature				
T-Ambient (Max)	45 ℃			
T-Ambient (Min)	-20 ℃			
T-Storage (Max)	65 ℃			
T-Storage (Min)	-40 °C			
T-Case Maximum (Nom)	65 ℃			
Controls and dimming				
Dimmable	Wireless Dim			
Mechanical and housing				
Product Length	1500 mm			
Bulb Shape	Tube, double-ended			
Approval and application				
Energy Efficiency Class	D			


Energy Saving Product	Yes			
Approval Marks	RoHS compliance TUV CE marking KEMA Keur			
	certificate			
Energy Consumption kWh/1000 h	25 kWh			
EPREL Registration Number	406202			
Product data				
Full product code	871869966976800			
Order product name	MasterConnect LEDtube IA 1500mm UO			
	25W840 T8			
EAN/UPC - Product	8718699669768			
Order code	929002210802			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material Nr. (12NC)	929002210802			
Net Weight (Piece)	0.450 kg			

Dimensional drawing




Product	D1	D2	A1	A2	A3
MasterConnect LEDtube	25.8	28 mm	1498.7	1505.8	1512.9
IA 1500mm UO 25W840	mm		mm	mm	mm
T8					

Photometric data






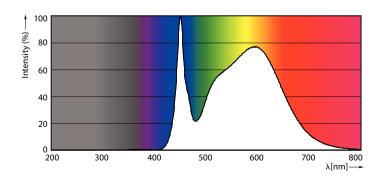

MC LEDtube G13 840


MasterConnect LEDtube EM/mains T8


Photometric data




MC LEDtube G13

Lifetime

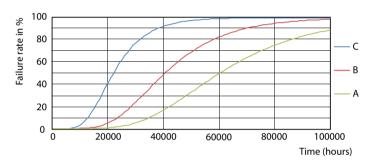

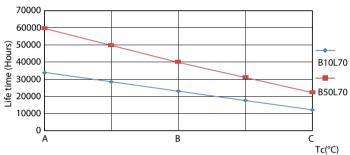

FailureRate

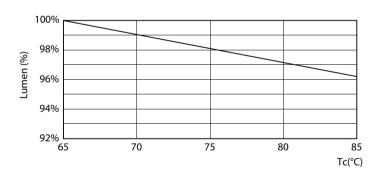

80 90 80 70 60 8000 100000 Burning hours


MC LEDtube 25W 60K LumenVsTc

Lumen Maintenance Diagram

LifetimeVsTc

MasterConnect LEDtube EM/mains T8

Lifetime

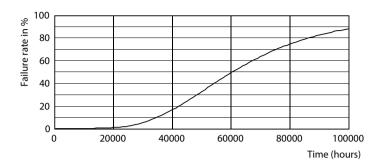

Life Expectancy Diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.