



Essential LEDspot GU10

LEDCLA 50W GU10 865 100-240V 36D ND3PF/4

Essential LEDspots are compatible with most existing fixtures with a GU10 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots deliver significant energy savings and minimize initial investment.

Product data

General information	
Cap-Base	GU10 [GU10]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	4-50W
Light technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	350 lm
Luminous Intensity (Nom)	540 cd
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	87.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz

Power (Nom)	4 W
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.4
Voltage (Nom)	100-240 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Bulb Shape	PAR16 [PAR 2 inch]
Approval and application	
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	- kWh


Essential LEDspot GU10

Product data

Full product code	871869974983500
Order product name	LEDCLA 50W GU10 865 100-240V 36D ND3PF/4
EAN/UPC - Product	8718699749842
Order code	929002350483

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002350483
Net Weight (Piece)	0.052 kg


Dimensional drawing




LEDCLA 50W GU10 865 100-240V 36D ND3PF/4

Product	D	C
LEDCLA 50W GU10 865 100-240V 36D ND3PF/4	50.5 mm	54.5 mm


Photometric data



LEDspots CLA 4W PAR16 GU10 865 36D

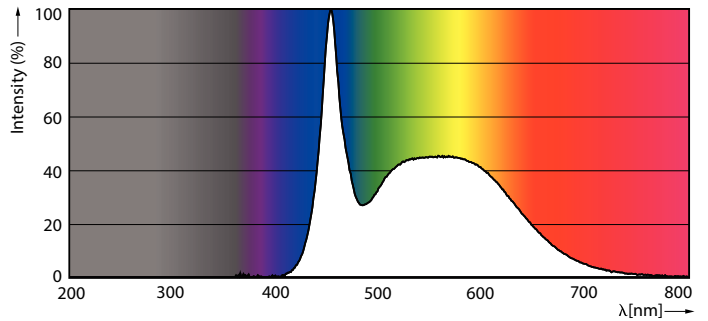

LEDspots CLA 4W PAR16 GU10 865 36D




LEDspots CLA 4W PAR16 GU10 827 36D

Essential LEDspot GU10

Lifetime



LEDspots LED 25K

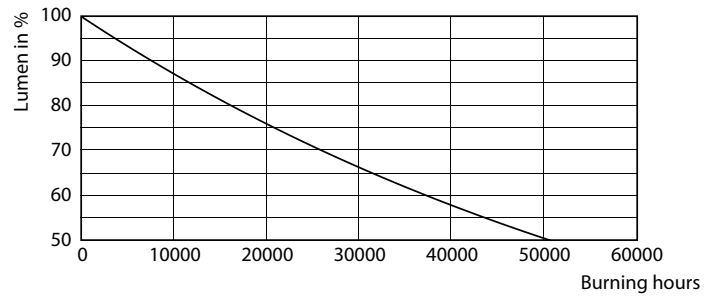

LEDspots LMP 25K

