



# CorePro LED PLC 2P

## LED PLC 11W 830 2P G24D

CorePro LED PLC 2P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplampping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

### Product data

General information	
Cap-Base	G24D [ G24d]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Light technical	
Color Code	830 [ CCT of 3000K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	1250 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	113.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	11 W
Lamp Current (Max)	86 mA
Lamp Current (Min)	86 mA
Lamp Current (Nom)	86 mA


Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	67 °C
Controls and dimming	
Dimmable	No
Mechanical and housing	
Product Length	100 mm
Bulb Shape	PL-C
Approval and application	
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate

# CorePro LED PLC 2P

Energy Consumption kWh/1000 h	- kWh
<b>Product data</b>	
Full product code	692234191549900
Order product name	LED PLC 11W 830 2P G24D
EAN/UPC - Product	6922341915499
Order code	929002440210

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002440210
Net Weight (Piece)	0.072 kg



## Dimensional drawing

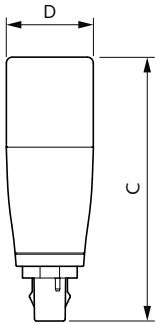

LED PLC 11W 830 2P G24D

Product	D1	D2	A1	A2	A3
LED PLC 11W 830 2P G24D	135 mm		113 mm	120 mm	135 mm


## Photometric data

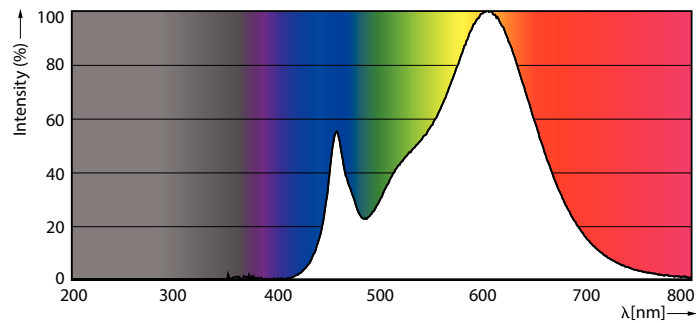

© 2021 Philips Lighting B.V. Page 11

LEDtube PLC 11W G24D 1250lm 830



LEDtube PLC 11W G24D 1250lm 830



LEDtube PLC 11W G24D 1400lm



# CorePro LED PLC 2P

## Lifetime

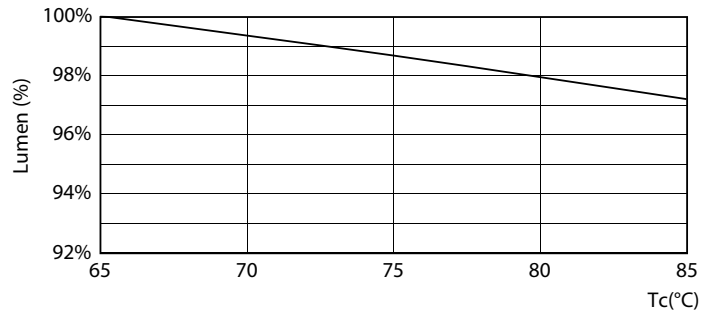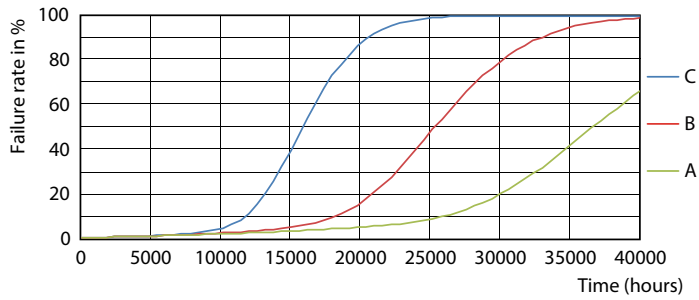


LEDtube 25K FailureRate

LEDtube PLC 11W 15K 1 LumenVsTc

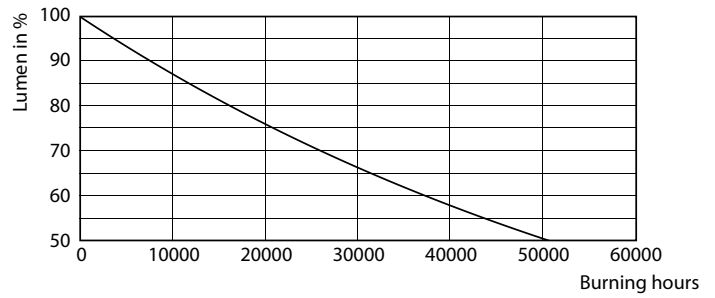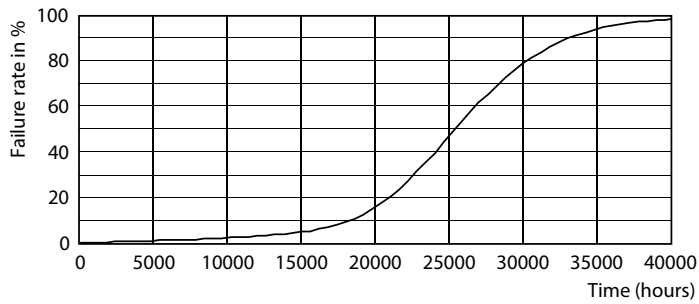

LEDtube 25K

LEDtube 25K

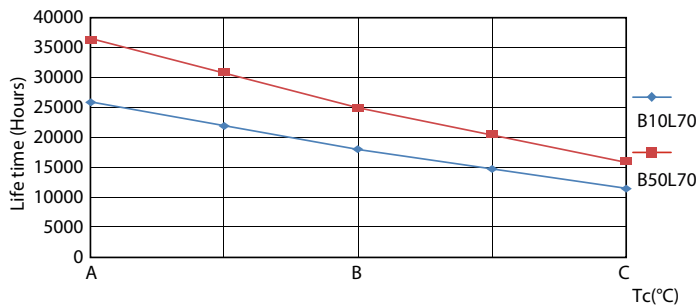

LEDtube 25K LifetimeVsTc

## CorePro LED PLC 2P

