



MASTER Plastic LEDbulbs

MASTER LEDbulb DT 5.5-40W B22 A60 CL

The MASTER Plastic LEDbulb range delivers a dimmable glow effect for a welcoming, warm atmosphere, making it ideal for general lighting applications in the hospitality industry. Its unique design radiates warm light in all directions, making it a true alternative to incandescent lamps. They are particularly suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. Compatible with existing fixtures with an E27 holder and designed for retrofit replacement of incandescent bulbs, MASTER Plastic LEDbulb delivers huge energy savings of up to 80% compared with traditional incandescent lamps and provides excellent quality of light. By offering a lifetime of 25,000 hours it lowers maintenance costs. They can be used together with most leading-edge dimmers, enabling further efficiencies while helping to create the desired atmosphere.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General information	
Cap-Base	B22 [B22]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Flux measurement reference	Sphere

Light technical	
Color Code	822-827 [tunable warm white]
Luminous Flux (Nom)	470 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2200 2700 K
Luminous Efficacy (rated) (Nom)	85.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80

MASTER Plastic LEDbulbs

LLMF At End Of Nominal Lifetime (Nom)	70 %
---------------------------------------	------

Operating and electrical

Input Frequency	50 to 60 Hz
Power (Nom)	5.5 W
Lamp Current (Nom)	26 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

Controls and dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and housing

Bulb Finish	Clear
-------------	-------

Bulb Shape	A60 [A 60mm]
------------	---------------


Approval and application

Energy Efficiency Class	F
Energy Consumption kWh/1000 h	6 kWh
EPREL Registration Number	614851

Product data

Full product code	871951430624000
Order product name	MASTER LEDbulb DT 5.5-40W B22 A60 CL
EAN/UPC - Product	8719514306240
Order code	929002490102
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002490102
Net Weight (Piece)	0.076 kg


Dimensional drawing

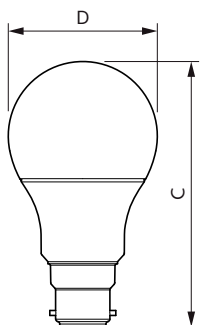


MASTER LEDbulb DT 5.5-40W B22 A60 CL

Product	D	C
MASTER LEDbulb DT 5.5-40W B22 A60 CL	60.5 mm	108 mm

Photometric data




LEDbulb MAS SLR1 5,5W A60 B22 827 CL-GUL



LEDbulb MAS SLR1 A60 5,5W B22 827 CL-LDD

MASTER Plastic LEDbulbs

Photometric data

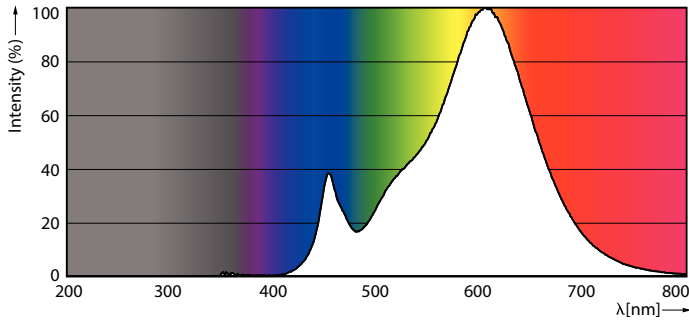

LEDbulb MAS SLR1 5,5W A60 E27 827 CL-POC

Lifetime



LEDspots LED 25K



LEDspots LMP 25K

