

# T8

## 15.5T8/COR/48-850/MF21/G/BAA 25/1

Our TLEDs are available in InstantFit (Type A / Type C) or MainsFit (Ballast bypass / Type B) versions. The InstantFit lamps work on a broad variety of ballasts and LED drivers. Only InstantFit has over 15,000 lamp & ballast combinations delivering even light output, energy savings and a long lifetime. Our MainsFit products feature a double-ended design, simplifying installation while a proprietary safety circuit minimizes a shock risk. Lamp sizes range from 2-foot to 8-foot and U-bend with a variety of lumen outputs.

### Product data

General information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
Technical Type	15.5-32W
Light technical	
Color Code	850 [ CCT of 5000K]
Beam Angle (Nom)	240 °
Luminous Flux (Nom)	2200 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Luminous Efficacy (rated) (Nom)	141.00 lm/W
Color Consistency	<5
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and electrical	
Input Frequency	50 to 60 Hz

Power (Nom)	15.5 W
Lamp Current (Max)	132 mA
Lamp Current (Min)	65 mA
Starting Time (Nom)	0.9 s
Warm Up Time to 60% Light (Nom)	0.9 s
UL Type	Type B - bypass the ballast
Power Factor (Nom)	0.9
Voltage (Nom)	120-277 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	70 °C
Controls and dimming	
Dimmable	No

# T8

## Mechanical and housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1200 mm
Bulb Shape	Tube, double-ended


## Approval and application

Energy Saving Product	Yes
Approval Marks	RoHS compliance UL certificate DLC compliance
Energy Consumption kWh/1000 h	- kWh

## Product data

Order product name	15.5T8/COR/48-850/MF21/G/BAA 25/1
EAN/UPC - Product	046677563745
Order code	929002497804
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	929002497804
Net Weight (Piece)	0.206 kg
Model Number	9290024978


## Dimensional drawing

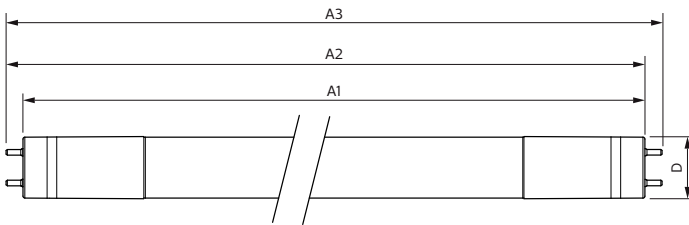

Product	D1	D2	A1	A2	A3
15.5T8/COR/48-850/ MF21/G/BAA 25/1	25.7 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm


15.5T8/COR/48-850/MF21/G/BAA 25/1

## Photometric data




General Uniform Lighting  
1 x T8 LED 15.5W 850lm 850  
Page 11

LEDtube COR 15,5W G13 2200lm 850

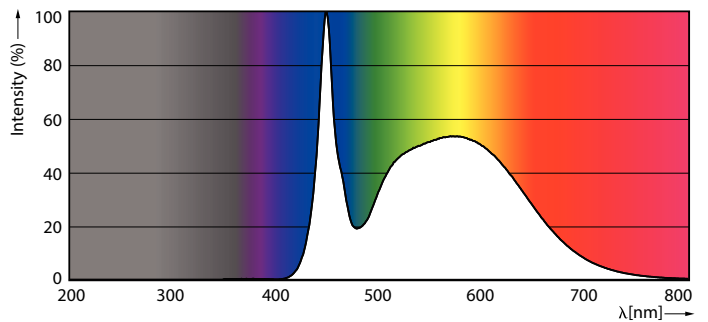


LEDtube COR 11W G13 1700lm 850

Photometric data




LEDtube COR 11W G13 1650lm

Lifetime

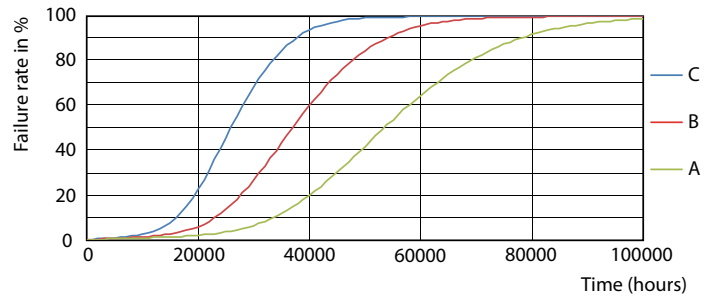

Life Expectancy Diagram

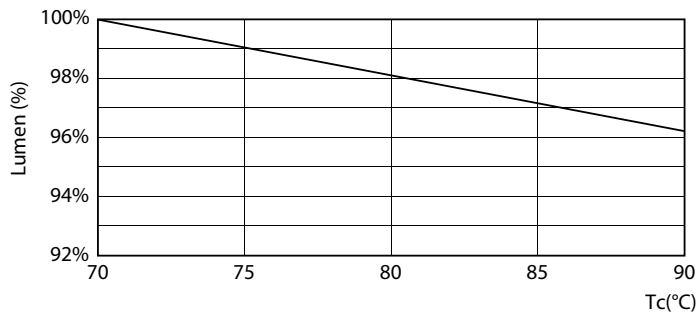

LEDtube COR 11W 50K LumenVsTc

LEDtube 50K FailureRate-LED



Lumen Maintenance Diagram

Lifetime



LEDtube 50K LifetimeVsTc-LED

