



# Master Value Decorative LED candles and lusters

# MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP G

The new Deco collection (candles and lusters) transforms your home with a perfect blend of (warm) white light and a lean, minimalistic lighting experience. With very long lifetime, up to 90% energy savings, no flickering and an instant full level brightness, you will also enjoy soft and evenly distributed light with that trendy and stylish charm for a welcoming harmony in your space.

### **Product data**

General Information		
Lighting Technology	LED	
Switching Cycle	20,000	
Nominal lifetime	15,000 hour(s)	
Cap-Base	E27 [E27]	
Light Technical		
Color Code	818 [CCT of 1800K]	
Luminous Flux	136 lumen	
Color Designation	1800	
Correlated Color Temperature (Nom)	1800 K	
Luminous Efficacy (rated) (Nom)	52.00 lm/W	
Color Consistency	<6	
Color rendering index (CRI)	80	
LLMF At End Of Nominal Lifetime (Nom) 70 %		
Flickering value (PstLM)	1	

Stroboscopic effect value (SVM)	0.4
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	2.6 W
Lamp Current (Nom)	14 mA
Wattage Equivalent	15 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	38 °C


Datasheet, 2023, July 6 data subject to change

# Master Value Decorative LED candles and lusters

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Amber
Bulb Shape	P45 [P 45mm]
Approval and Application	
Energy Consumption kWh/1000 h	3 kWh
CE mark	Yes
EU RoHS compliant	Yes
Product Data	
Full product code	871951431607200


Order product name	MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP
	G
Order code	929002983402
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929002983402
Full product name	MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP
	G
EAN/UPC - Case	8719514316089

# Dimensional drawing




Product	D	С
MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP G	46 mm	80 mm

## Photometric data



Calculus Pheramentor 4.5 Philips Lighting B.V. Pages 51


General uniform lighting - MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP G



Light Distribution Diagram - MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP G


# Master Value Decorative LED candles and lusters


### Photometric data

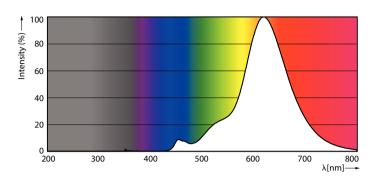

Spectral Power Distribution Colour - MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP G

### Lifetime

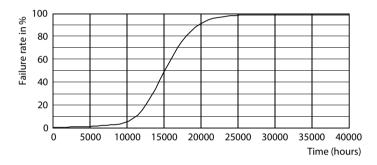

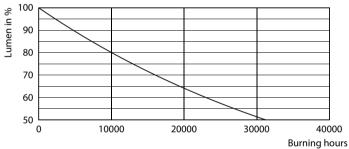

Life Expectancy Diagram - MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP  ${\sf G}$ 

Lumen Maintenance Diagram - MAS VLE LEDBulbD 2.6-15W E27 GOLDP45SP G



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.