



LED Corn Cobs

63CC/LED/840/LS EX39 G3 BB 3/1

Philips Corn Cob LED replacement lamps are perfect LED replacement for a variety of outdoor applications. High intensity illumination, which means you get added visibility for applications like streets, public areas, and much more for a fraction of the energy used by conventional HID.


Product data

| General information | |
|---------------------------------------|-----------------------------------|
| Cap-Base | EX39 [Exclusionary Mogul Screw] |
| EU RoHS compliant | Yes |
| Nominal Lifetime (Nom) | 50000 h |
| Switching Cycle | 50000X |
| Light technical | |
| Color Code | 840 [CCT of 4000K] |
| Luminous Flux (Nom) | 9000 lm |
| Color Designation | Cool White (CW) |
| Correlated Color Temperature (Nom) | 4000 K |
| Luminous Efficacy (rated) (Nom) | 142.00 lm/W |
| Color Consistency | ANSI 5000K quadrangle |
| Color Rendering Index (Nom) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Operating and electrical | |
| Input Frequency | 50 to 60 Hz |
| Power (Nom) | 63 W |
| Lamp Current (Nom) | 700 mA |
| Wattage Equivalent | 250 W |
| Starting Time (Nom) | 1 s |
| Warm Up Time to 60% Light (Nom) | 1 s |

| UL Type | Type B - bypass the ballast |
|---------------------------------|--------------------------------|
| Power Factor (Nom) | 0.9 |
| Voltage (Nom) | 100-277 V |
| Temperature | |
| T-Case Maximum (Nom) | 65 °C |
| Controls and dimming | |
| Dimmable | Preset Dimming |
| Mechanical and housing | |
| Bulb Finish | Clear |
| Bulb Shape | Corn cob |
| Product data | |
| Order product name | 63CC/LED/840/LS EX39 G3 BB 3/1 |
| EAN/UPC - Product | 046677564247 |
| Order code | 929002999904 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 3 |
| Material Nr. (12NC) | 929002999904 |
| Net Weight (Piece) | 0.816 kg |

LED Corn Cobs



Dimensional drawing

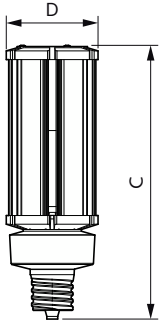

63CC/LED/840/LS EX39 G3 BB 3/1

| Product | D | C |
|--------------------------------|-------|--------|
| 63CC/LED/840/LS EX39 G3 BB 3/1 | 85 mm | 260 mm |


Photometric data

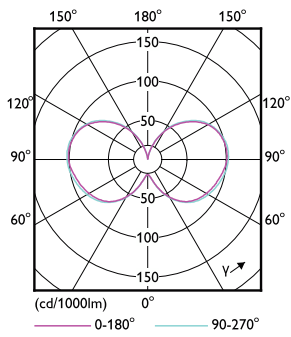

General Uniform Lighting
EXCESSIVE DIMMING
General Illuminance (lx)
General Illuminance (fc)
Beam Diameter (mm)
Beam Angle (°)
Illuminance (lx)
Footcandle (fc)

LEDForce LS EX39 63W Corncob EX39-LDD

LEDForce LS EX39 63W Corncob EX39 840-GUL

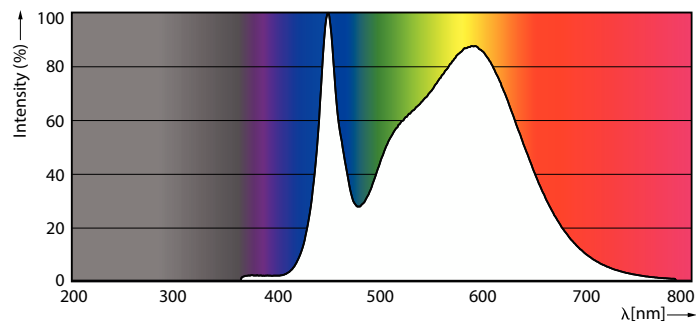

LEDForce LS EX39 63W Corncob EX39 840-POC

LED Corn Cobs

Lifetime



50K

50K

